


FED. SUP CLASS
5935

DESIGN STANDARD FOR USE WITH MIL-C-28754/31(EC)

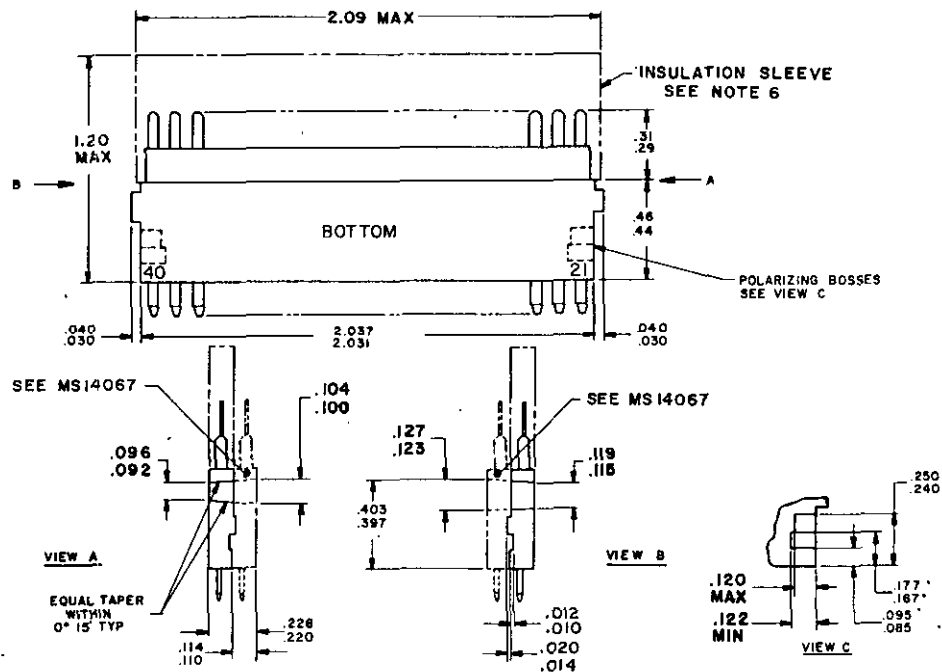

Type	Wire accommodation	Contact style	Wire size	Termination tool <u>/1</u>
1	Flat conductor cable	I	22-24	MTMT-B-1000
2	Single round wires	II	24-30	MTMT-B-1000
3	Multiple round wire cable	II	24-30	AA-400

/1 Raychem part number or equivalent.

NOTES:

1. Dimensions are in inches.
2. Break sharp edges .005 maximum.
3. Contact numbers 21 and 40, and "bottom" shall be marked as shown in white characters, .296 inch high.
4. Contacts shall be copper based alloy per QQ-B-613, No. 260.
5. Material: Polyphenylene sulfide or diallyl phthalate.
6. Insulation sleeve material optional.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

CANCELED AFTER 16 NOVEMBER 1979

USE MIL-C-28754/51

This military standard is approved for use by the Naval Elec. Systems Cmd. Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

P.A. Navy - EC	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust		INSERT, BOTTOM	MS14068(NAVY)
Procurement Specifications None	SUPERSEDES:		PAGE 1 OF 2