

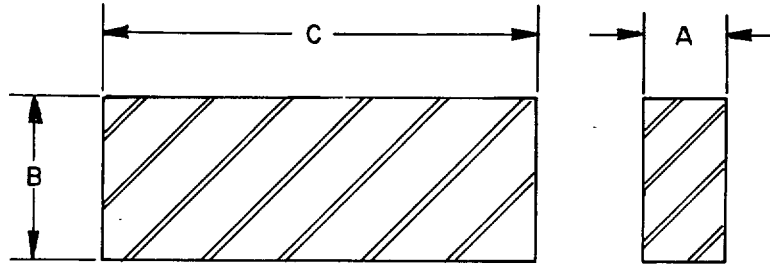
FED. SUP CLASS
9515

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	A NOMINAL SIZE INCHES	B NOMINAL SIZE INCHES	C NOMINAL SIZE FEET	CONDITION	ADDITIONAL ^{2/} REQUIREMENTS	FORMING ^{1/} PROCESS
-001	.005	24	8	ANNEALED	ds	H
-003	.006	36	10	ANNEALED	ds	H
-005	.010	24	3	ANNEALED	ds	H
-007	.010	48	8	ANNEALED	bo	C
-009	.012	36	10	ANNEALED	bo	C
-011	.016	36	10	ANNEALED	do	C
-013	.016	48	8	ANNEALED	bo	C
-015	.018	36	8	ANNEALED	do	C
-017	.018	36	12	ANNEALED	ds	H
-019	.020	36	8	ANNEALED	bo(1)	C
-021	.020	36	10	ANNEALED	bo	C
-023	.025	36	10	ANNEALED	bo	C
-025	.032	36	10	ANNEALED	bo	C
-027	.032	36	10	QUARTER HARD	do	C
-029	.032	48	12	ANNEALED	bo	C
-031	.036	48	8	ANNEALED	bo	C
-033	.040	36	10	ANNEALED	bo	C
-035	.045	48	8	ANNEALED	bo	C
-037	.050	36	10	ANNEALED	do	C
-039	.050	48	8	ANNEALED	bo	C
-041	.050	48	12	ANNEALED	bo	C
-043	.062	48	12	ANNEALED	ds	C
-045	.063	36	10	QUARTER HARD	ds	H
-047	.063	48	8	ANNEALED	bo	C
-049	.071	36	8	ANNEALED	do	C
-051	.071	36	10	HALF HARD	do	C
-053	.080	36	10	ANNEALED	ds	C
-055	.080	36	10	QUARTER HARD	bo	C
-057	.090	36	10	ANNEALED	do	C
-059	.090	48	8	ANNEALED	bo	C
-061	.093	36	8	ANNEALED	do	H
-063	.100	48	8	ANNEALED	bo	C
-065	.125	36	10	ANNEALED	bo	C
-067	.160	36	8	ANNEALED	do	C

^{1/} SEE REQUIREMENT 2^{2/} SEE REQUIREMENT 3APPROVED 12 OCT 87
REVISED

P. A. NAVY- AS Other Cust ARMY- AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SHEET, METAL, CORROSION RESISTANT, TYPE 302	MILITARY STANDARD
			MSI4507
PROCUREMENT SPECIFICATION MIL-S-5059	SUPERSEDES:	PAGE 1 OF 2	

USER ACTIVITIES:
ARMY - MEREVIEWER ACTIVITIES:
OLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

FED. SUP CLASS
9515

REQUIREMENTS:

1. MATERIAL. STEEL, CORROSION RESISTANT, TYPE 302 (UNS S30200) AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. FORMING PROCESS. COLD ROLLED - CODE "C"
HOT ROLLED - CODE "H"
3. ADDITIONAL REQUIREMENTS.

BRIGHT	OVERALL - CODE "bo"
DESCALED	OVERALL - CODE "ds"
DULL	OVERALL - CODE "do"
BRIGHT ONE SIDE	OVERALL - CODE "bo(1)"
4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

 EXAMPLE: MS14507C001

			(SEE TABLE I)
			COLD ROLLED
			BASIC MS NUMBER
5. MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
2. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 12 OCT 87 REVISED

P. A. NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SHEET, METAL, CORROSION RESISTANT, TYPE 302	MILITARY STANDARD MS14507
PROCUREMENT SPECIFICATION MIL-S-5059		SUPERSEDES:	PAGE 2 OF 2

DD FORM 672-1 (COORDINATED)
1 MAY 73

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9515-0644

USER ACTIVITIES:
ARMY - MEREVIEWER ACTIVITIES:
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.