

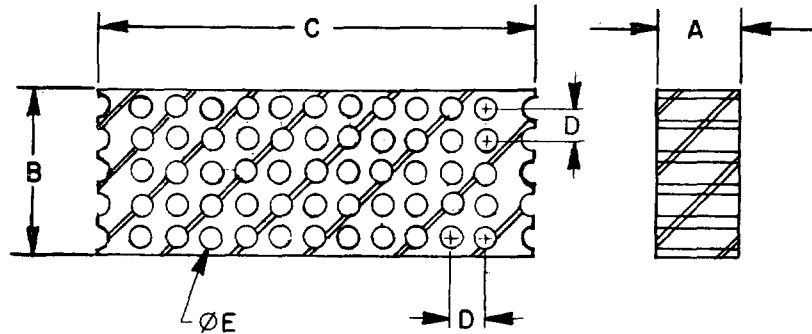
FED. SUP CLASS
9515USER ACTIVITIES:
ARMY - ME

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	A NOMINAL SIZE INCHES	B NOMINAL SIZE INCHES	C NOMINAL SIZE FEET	D PERFORATION CENTER TO CENTER DISTANCE	Ø E PERFORATION DIA	CONDITION	ADDITIONAL ^{1/} REQUIREMENTS
-001	.025	36	10	0.125	0.062	ANNEALED	ds

^{1/} SEE REQUIREMENT 3

REQUIREMENTS:

- MATERIAL. STEEL, CORROSION RESISTANT, TYPE 301 (UNS S30100) AS SPECIFIED IN PROCUREMENT DOCUMENT.
- FORMING PROCESS. COLD ROLLED
- ADDITIONAL REQUIREMENTS.

DESCALED OVERALL - CODE "ds"

- PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14515-001

(SEE TABLE I)

BASIC MS NUMBER

- MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

- IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
- REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. NAVY- AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SHEET, PERFORATED, METAL, STAGGERED 60° CORROSION RESISTANT, TYPE 301	MILITARY STANDARD MS14515
PROCUREMENT SPECIFICATION MIL-S-5059	SUPERSEDES:	PAGE OF	

AMSC N/A

DD FORM 672-1 (COORDINATED)
1 MAY 73

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9515-0652

REVISED
APPROVED 12 OCT 87