


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any way endorsing the product or any other person or organization.

① This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, types TS-143 and TS-144. The items covered herein are for replacement purposes only and shall not be used in the design of new equipment.

FED. SUP. CLASS
6940

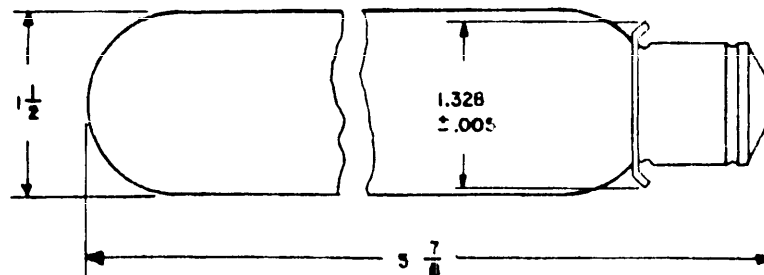

MS part number	Type	FIN
MS15539-1	TS-143	240-6065
MS15539-2	TS-144	240-6065

Characteristics	Type TS-143	Type TS-144
Industry number	PH/1M/T12/6	PH/1M/T12/1
Watts	750	1000
Volts	115	115
Bulb	T-12	T-12
Finish	Clear	Clear
Base	D.c. medium ring	D.c. medium ring
Filaments	C-13D	C-13D
Light center length (inches) ¹	6-1/4	6-1/2
Hours life (approximate)	50	10
Use	① Motion picture projector type IC/QPM, 16 mm.	① Motion picture projector type IC/QPM, 16 mm.

¹Distance from center of light source to top of base flange.

① Delete overall length data in characteristics.

APPROVED 1 AUG 1954 REVISED ① 27 JUN 1956

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS15539 (SHIPS)
	Ships		
Procurement Specification		SUPERSEDES	SHEET 1 OF 1