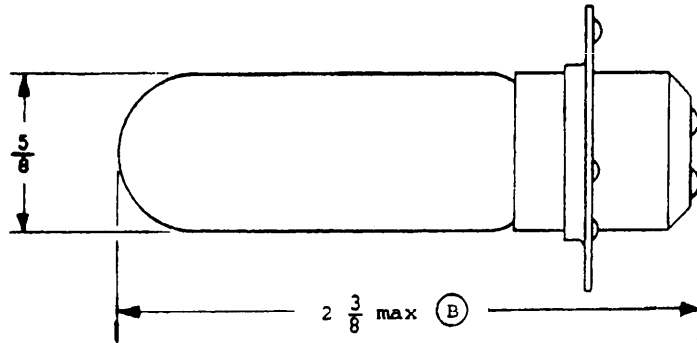


FED. SUP CLASS
6240Characteristic

(B) Industry No.

Amperes

Volts

Bulb

Finish

Base

Filaments

Light center length (inches)^{2/}

Hours life (approximate)

(B) BRX^{1/}

1

6

T-5

Clear

Prefocusing, double contact

C-6

1-1/8

100

^{1/} Burn horizontal.^{2/} Distance from center of light source to plane of locating bosses of prefocusing collar.

(B) Deleted "use" information and FIIN number.

MS part number

MS15540-1

(B) Denotes changes

P. A. SH
Other CustINTERNATIONAL
INTEREST

TITLE

LAMP, INCANDESCENT, T-5, PREFOCUSING,
DOUBLE CONTACT

MILITARY STANDARD

MS15540(SH)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

Page 1 of 1

6240-N290

DD FORM 1, 672-1 (LIMITED CIRCULATION)

THESE INSTRUCTIONS APPLY TO ALL FORMS OF THIS TYPE

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 13 May 1954 REVISED (A) 27 June 1956 (B) 3 April 1978