


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

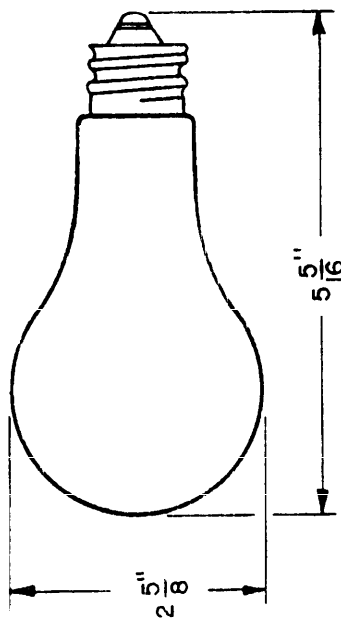

Ⓐ ENTIRE STANDARD REVISED  
Project 6240-0046

MS part number	Watts	Volts	Finish	Filaments	Light center length <sup>1/</sup> (inches)	Hours life (approximate)	Lumen output (approximate)	Industry No.
MS15541-1	100	115	Inside frosted	C-17	3-7/8	1000	1210	100A/RS(115)
MS15541-2	100	120	Inside frosted	C-17	3-7/8	1000	1210	100A/RS(120)

<sup>1/</sup> Distance from center of light source to bottom base contact

NOTES:

- For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- Referenced documents shall be of the issue in effect on date of invitations for bid.

FED. SUP CLASS  
6240

P. A. SHIPS Other Cust CE	TITLE LAMP, INCANDESCENT, A-21, MEDIUM SCREW	MILITARY STANDARD MS 15541
Procurement Specification W-L-101	SUPERSEDES.	SHEET 1 OF 1

APPROVED 2 AUG 1954 REVISED Ⓐ 14 JUL 1961