


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

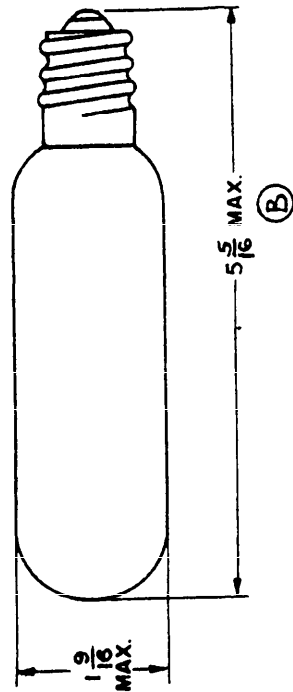

PROJECT 6240-N029Sh

MS part number	Finish	Watts	Volts	Filaments	Light center length (inches)	Hours life (approx.)	Use	Lumen output (approx.)	Industry number
MS15545-1	TS-121	100/100	115	C-5/C-9	3	750	Navigation light	1050	50/59-12
MS15545-2	Clear	50/50	115	C-5/C-9	3 + 1/8	750	Navigation light	375	

Distance from center of light source to bottom base contact.

1. Center contact is for primary (C-5), ring contact for secondary (C-9) filaments.
2. Lamp shall burn base down only.
3. Filaments operated separately.

FED. SUP. CLASS  
6240

CUSTODIANS	Ships	MILITARY STANDARD		MS15545 (SHIPS)
		LAMP, INCANDESCENT, T-12, MEDIUM SCREW, 3 CONTACT,		
Procurement Specification None		SUPERSEDES:		SHEET 1 OF 1