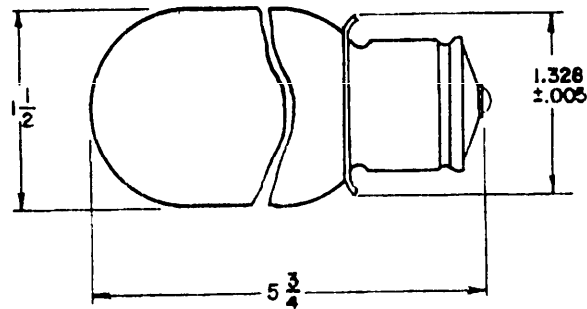


FED. SUP CLASS  
6240

MS part number	(B) Ind. No.
MS15555-1	DDB
MS15555-2	DFD

Characteristic

(B) Industry No.	DDB <sup>1/</sup>	DFD <sup>1/</sup>
Watts	750	1000
Volts	120	120
Bulb	T-12	T-12
Finish	Clear, opaque coating on end	Clear, opaque coating on end
Base	Medium, prefocusing single contact	Medium, prefocusing single contact
Filaments	C-13D	C-13D
Light center/length (inches) <sup>2/</sup>	2-3/16	2-3/16
Hours life (approximate)	25	10

<sup>1/</sup> Should be used only in equipment that provides adequate forced cooling.

<sup>2/</sup> Distance from center of light source to top of base fin.

(B) Denotes changes

P. A. SH Other: Cast	INTERNATIONAL INTEREST	TITLE LAMPS, INCANDESCENT, T-12, MEDIUM PREFOCUSING, SINGLE CONTACT	MILITARY STANDARD MS15555(SH)
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	Page 1 of 1

DD FORM 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6240-N288

This military standard is approved for use by the Naval Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 2 AUG 1954 REVISED (A) 27 JUN 1956 (E) 3 APR 1978