


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication, or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights, or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

(A) This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, type TS-87. The item covered herein is for replacement purposes only and shall not be used in the design of new equipment.

FED. SUP. CLASS
6240

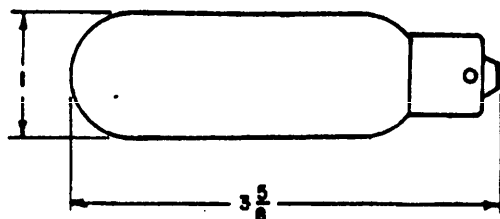

Characteristic

Type TS-87

Watts	150
Volts	120
Bulb	T-8
Finish	Clear
Base	Bayonet candelabra, single contact
Filaments	2CC-8
Light center length (inches) ✓	1-3/8
Hours life (approximate)	25
Lumen output (approximate)	3300
Use	Magnavox, illustrovax junior, 35 mm. strip film.

✓ Distance from center of light source to top of base pins.

(A) Deleted overall length data in characteristics.

MS part number		FTIN	
MS15561-1		143-3106	
CUSTOMERS	OTHER INT.	MILITARY STANDARD LAMP, INCANDESCENT, T-8, BAYONET CANDELABRA, SINGLE CONTACT	
Ships	A - N - AF -		
Procurement Specification None		SUPERSEDES:	
		MS15561 (SHIPS)	
		SHEET 1 OF 1	

DD FORM 672
1 OCT 82

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 - 703-023/8145

GPO 893861

APPROVED 2 AUG 1954 REVISED (A) 27 JUN 1986