


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, or in any way supplied the said drawings, specifications, or other data shall not be regarded as an implication or endorsement in any manner, licensing the holder or any other person or organization or depriving any rights or privileges in manufacturing, or in all any other manner, that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

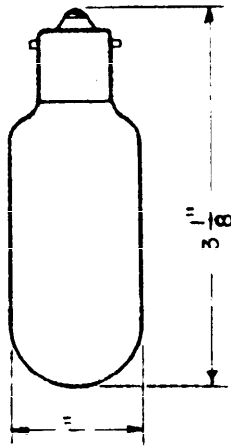

MS part number	Amperes or watts	Volts	Finish	Filaments	Light center length (inches) $\frac{1}{4}$	Hours life (approx- imate)	Lumen output (approx- imate)	Industry No.
MS15562-1	5A	10	Clear	C-6	1-19/32	100	1000	5A/T8SC
MS15562-3	7-1/2A	10	Clear	C-6	1-19/32	100	1600	7.5A/T8SC
MS15562-5	4A	8.5	Clear	C-6	1-3/4	100	680	4A/T8/25

$\frac{1}{4}$ Distance from center of light source to top of base pins

NOTES:

- For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- Referenced documents shall be of the issue in effect on date of initiation for bid.

FED. SUP. CLASS
6240

® ENTIRE STANDARD REVISED
Project 6240-0048

SHIP'S Other Cust CF	TITLE LAMP, INCANDESCENT, T-8, BAYONET CANDELABRA SINGLE CONTACT	MILITARY STANDARD MS 15562
Procurement Specification W-L-101	SUPERSEDES	

APPROVED 18 MAY 1954 REVISED (A) 27 JUNE 1956 (B) 14 JUL 1961