


User activities:
Army - ME

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

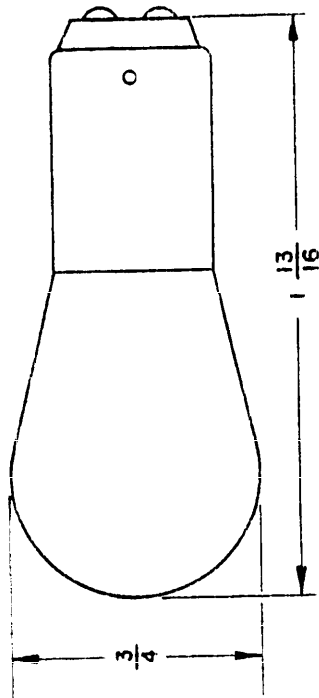

*U.S. GOVERNMENT PRINTING OFFICE: 1977-703-122/155

© ENTIRE STANDARD REVISED

P.A.	SHIPS	TITLE	MILITARY STANDARD
Other Cust	NONE	LAMP, INCANDESCENT, S-6 BAYONET CANDELABRA, DOUBLE CONTACT	MS15567
Procurement Specification	W-L-101	SUPERSEDES:	PAGE 1 OF 1

MS part number	Watts	Rated Volts	Finish	Filament type	Light Center length ¹	Hours of life (average)	Lumen output (average)	Industry No.
MS 15567-1	6	120	Clear	C-7A	1-1/16	1500	40	6S6DC(120)
MS 15567-2	6	130	Clear	C-7A	1-1/16	1500	40	6S6AC(130)

¹/Distance from center of light source to top of base pins.

NOTES:

1. All dimensions are in inches.
2. For design feature purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitation for bids, or request for proposal.

FED. SUP CLASS
6240

APPROVED 2 AUG. 1954 REVISED Ⓐ 27 JUN 1956 Ⓑ 14 JUL 1961 Ⓒ 12 DEC 1977