


This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

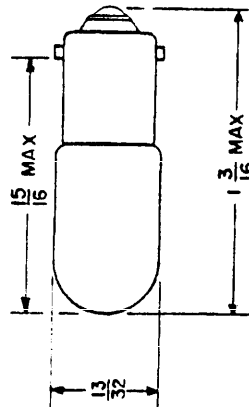

MS part number	Industry number	Amperes	Volts	Light ^{1/} center length	Finish	Hours life approximate	Approximate candlepower
MS15571-1	44	0.25	6.3	Inch 25/32	Clear	3000	0.90
MS15571-2	47	.15	6.3	25/32	Clear	3000	.52
MS15571-3	1806	.15	5.1	1/2	Clear	100	.50
(F)							
MS15571-5	1809	.06	2	3/4	Clear	1000	.02
(F)							
MS15571-7	44R	.25	6.3	25/32	Red	3000	---
MS15571-8	1815	.20	14	3/4	Clear	3000	1.40
2/MS15571-9	1810	.40	6.3	23/32	Clear	3000	1.50
MS15571-10	1819NR	.07	28	5/8	Natural Red	1000	---
MS15571-11	45	.35	3.2	25/32	Clear	3000	0.50

^{1/} Distance from center of light source to top of base pins.

^{2/} Maximum overall length, 1-1/8 inches.

(F) Part numbers 4 and 6 have been superseded by MS25231: Part no. 4 - MS25231-313; part no. 6 - MS25231-1819.

(F) Entire standard revised

P A Other CSH	INTERNATIONAL INTEREST	TITLE LAMPS, INCANDESCENT, T-3-1/4, MINATURE BAYONET, SINGLE CONTACT	MILITARY STANDARD MS15571(SH)
PROCUREMENT SPECIFICATION None	SUPERSEDES: MS15813	Page 1 of 1	

DD FORM 672-1 (LIMITED COORDINATION)

PREPARED BY THE JOINT MILITARY STANDARDIZATION BOARD

6240-N258