


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

A This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, types TS-26, TS-31 and TS-108. TS-26 and TS-31 are standards for use in the design of new equipment procured by the Bureau of Ships. Type TS-108 is for replacement purposes only and shall not be used in the design of new equipment.

FED. SUP. CLASS
6240

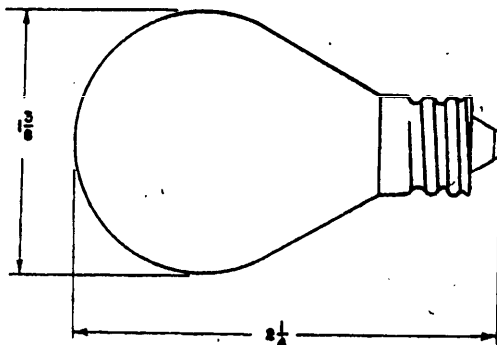

1193

MS part number	Type	FIIN
MS15575 - 1	TS-26	155-8880
MS15575 - 2	TS-31	A 797-8830
MS15575 - 3	TS-108	143-3063

Characteristic	Type TS-26	Type TS-31	Type TS-108
Industry number	1721K	-----	-----
Candlepower	21	-----	-----
Watts	-----	16	10
Volts	8-8	115	A 115 - 125
Bulb	S-11	S-11	S-11
Finish	Clear	Clear	Clear
Base	Candelabra screw	Candelabra screw	Candelabra screw
Filaments	C-2	C-5	C-7A
Light center length (inches)	1-7/16	1-3/8	1-5/8
Hours life	A 200	200	1500
Lumen output	Motorboat lighting fixtures and running lights	A 145 Sperry mk. XVI repeater Sperry mk. VIII binocular Arma mk. IV binocular Arma mk. IV repeater	78 Devry 35 mm. projector
Use			
Design voltage	8.4		

Distance from center of light source to bottom base contact.

A Deleted overall length data in characteristics.

CUSTODIANS Shipw	OTHER INT. A - N - AF -	MILITARY STANDARD		MS15575 (SHIPS)
		LAMP, INCANDESCENT, S-11, CANDELABRA SCREW		
PROCUREMENT SPECIFICATION		SUPERSEDES:		SHEET 1 OF 1