


This Military Standard is approved for use by the Naval Sea Systems Command and is available for use by all departments and Agencies of the Department of Defense

(H) ENTIRE STANDARD
REVISED

(PROJECT 6240-N282Sh)

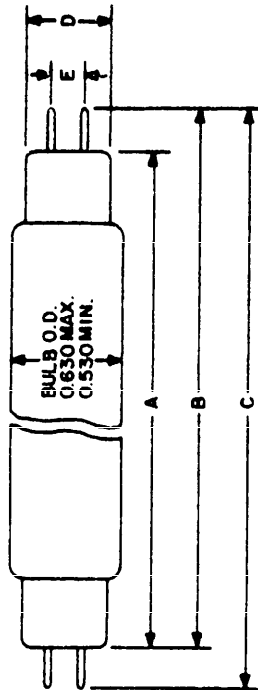

MS part number	Industry number	Watts	Hours life (approx.)	Lumen output (approx.)	Dimensions, Inches					National stock number	
					A (max.)	B (max.)	C (max.)	D (max.)	E		
						(min.)					
MS15588-3	F8T5/cw	8	7500	380	11.34	11.62	11.53	11.91	0.57	0.187	6240-00-299-5546
MS15588-4	F6T5/cw	6	7500	260	8.34	8.62	8.53	8.91	0.57	0.187	6240-00-299-7252

NOTES:

1. Referenced documents shall be of the issue in effect on date of invitation for bid.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. Pin alignment - When assembled in a base, the pins shall readily enter two holes each 0.110 inch in diameter, the centers of which are spaced exactly 0.187 inch apart.

FED. SUP CLASS
6240

P.A.
SH
Other Cust

Procurement Specification
W-L-116

TITLE
LAMPS, FLUORESCENT, T-5, MINIATURE BIPIN

MILITARY STANDARD

MS15588(SHIPS)

SHEET 1 OF 1

APPROVED 18 May 1954 REVISED (F) 14 March 1967 (G) 17 June 1968 (H) 8 August 1975

DD FORM 1 SEP 57 672N

LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1975-603-766. 815