


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Ⓐ ENTIRE STANDARD REVISED  
Project 6240-0055

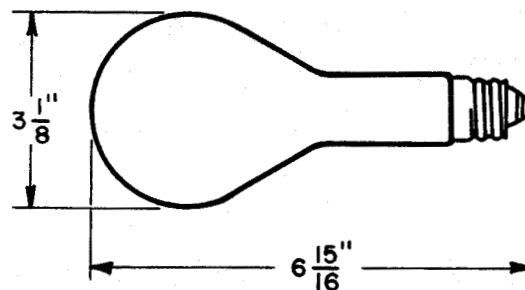

MS part number	Watts	Volts	Finish	Filaments	Light center length (inches) <sup>1/</sup>	Hours life (approximate)	Lumen output (approximate)	Industry No.
MS15592-1	150	115	Inside	C-17	5-1/4	1000	2050	150/RS(115)
MS15592-2	150	120	frosted Inside frosted	C-17	5-1/4	1000	2000	150/RS(120)

<sup>1/</sup> Distance from center of light source to bottom base contact.

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓑ CANCELED AFTER 23 JULY 1984.  
NO SUPERSEDING STANDARD.

FED. SUP CLASS  
6240

APPROVED 13 MAY 1954 REVISED Ⓐ 14 JUL 1961 Ⓑ 23 JULY 1984

P.A. SHIPS Other Cust CE	TITLE <b>LAMP, INCANDESCENT, PS-25, MEDIUM SCREW</b>	SHEET 1 OF 1
	MILITARY STANDARD <b>MS15592</b>	
Procurement Specification <b>W-L-101</b>	SUPERSEDES:	