


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, type TG-29. The item covered hereon is standard for use in the design of new equipment procured by the Bureau of Ships.

FED. SUP. CLASS  
6240

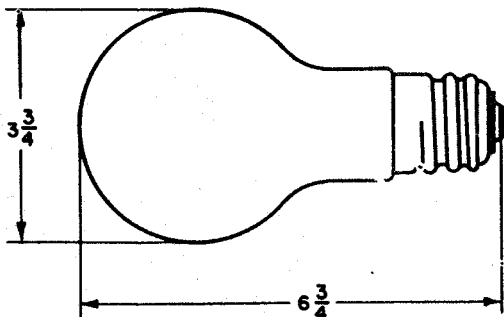

Characteristic

Type  
TG-29

Watts	100/200/300
Volts	115
Bulb	G-30
Finish	White
Base	Mogul, 3 contact
Filaments	2C-2R
Light center length (inches) <sup>1</sup>	3-3/4
Overall length (max. inches)	6-3/4
Hours life (approximate)	1000
Lumen output (approximate)	1400/3500/4900
Use	Floor lamps

<sup>1</sup>Distance from center of light source to bottom base contact.

**Ⓐ CANCELED AFTER 23 JULY 1984 .  
NO SUPERSEDING STANDARD.**

MS part number		FIIN	
MS15597-1		143-3100	
CUSTODIANS	OTHER INT.	<b>MILITARY STANDARD</b> LAMP, INCANDESCENT, G-30, MOGUL, 3 CONTACT	
Ships	A - N - AF -		
Procurement Specification		SHEET 1 OF 1	