


FED. SUP CLASS

3455

Review activity:  
DSA-GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection of all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

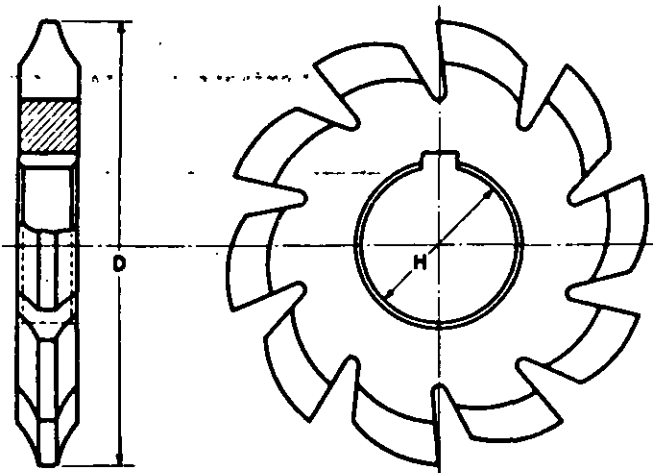

DASH NO.	Diametral Pitch	Cutter No.	Diameter of Cutter (D)	Diameter of Hole (H)
-38	7	6	2 7/8	1
-48	8	8	2 7/8	1

## NOTES:

1. Cutters shall cut a range of teeth for any given pitch as indicated in following list by cutter number:

Cutter No. 6 shall cut from 17 to 20 teeth.

Cutter No. 8 shall cut from 12 to 13 teeth.

2. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

3. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

4. The part number consists of the MS number, plus the dash number.

Example: MS15702-38.

© CANCELED after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2095

APPROVED 27 Sep 54 REVISED (A) 9 Apr 57 (B) 30 Mar 77 (C) 31 Mar 81

P.A. AL	TITLE	MILITARY STANDARD
Other Cust 99	CUTTERS, MILLING, MITER AND BEVEL GEAR, 14-1/2 DEGREE PRESSURE ANGLE	MS15702
Procurement Specification 666-C-755	SUPERSEDES:	SHEET 1 OF 1