


Review activity:
DSA-GS

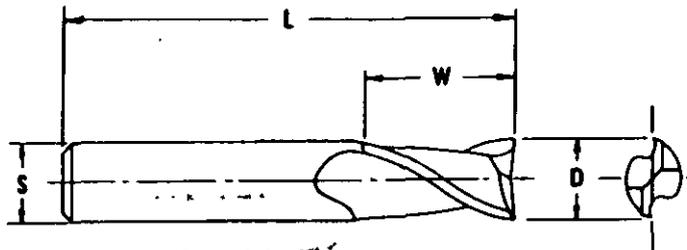

RIGHT-HAND CUTTERS WITH RIGHT-HAND HELICES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection of all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

DASH NO.	Diameter of cutter (D)	Diameter (S)	Length of cut (W)	Overall length (L)
-2	5/16	5/16	15/32	1-9/16
-3	3/8	3/8	9/16	1-5/8
-4	7/16	7/16	21/32	2
-5	1/2	1/2	3/4	2-1/16
-6	5/8	5/8	15/16	2-5/16
-7	3/4	3/4	1-1/8	2-1/2

NOTES:

1. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. The part number consists of the MS number, plus the dash number. Example: MS15707-2.
4. Dash No. -2/3/4/5/6/7 inactive for design after 30 May 1975 use MS15708-6/7/8/9/11/12 respectively.

Ⓢ CANCELED after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2099

APPROVED 21 Sep 54 REVISED A 9 Apr 57 B 30 Mar 77 C 31 Mar 81

P.A. AL	TITLE	MILITARY STANDARD
Other Cut 99	CUTTERS, MILLING, END, SINGLE, TWO-FLUTE, STRAIGHT-SHANK	MS15707
Programme Identification 700-3-755	SUPERSEDES:	SHEET 1 OF 1