


FED. SUP CLASS  
3455Review activity:  
USA-GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection of all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

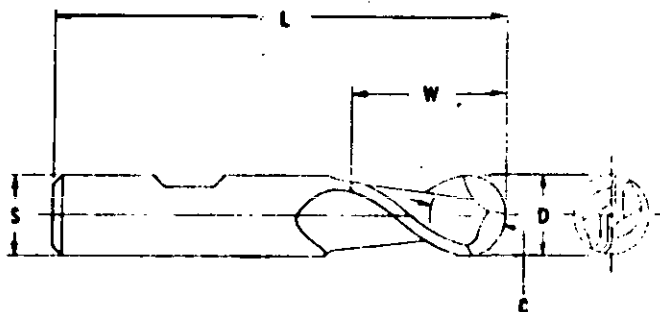

DASH NO.	Diameter of Cutter and End Circle (D&C)	Diameter of Shank (S)	Length of Cut (W)	Length Overall (L)
-1	1/8	3/8	3/8	2-5/16
-2	3/16	3/8	1/2	2-3/8
-3	1/4	3/8	5/8	2-7/16
-4	5/16	3/8	3/4	2-1/2
-5	3/8	3/8	3/4	2-1/2
-7	1/2	1/2	1	3
-9	3/4	3/4	1-5/8	3-7/8

## NOTES:

1. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. The part number consists of the MS number, plus the dash number.  
Example: MS15711-3.

© **CANCELED** after 31 March 1981. For procurement use  
American National Standards Institute ANSI B94.19.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2103

P.A. AL	TITLE	MILITARY STANDARD
Other Csw 99	CUTTERS, MILLING, END, SINGLE-END, BALL END, TWO-FLUTE, FLATTED STRAIGHT-SHANK	<b>MS15711</b>
Procurement Specification GGG-C-755	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672 (Coordinated)

EDITION OF 1 SEP 87 MAY BE USED.

Project No. 3455-0082

APPROVED 27 Sep 54 REVISED (A) 9 Apr 57 (B) 30 Mar 77 (C) 31 Mar 81