


This document has been promulgated by the Department of Defense as the Military standard to limit the selection of the item, product, or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED. SUP. CLASS  
5307

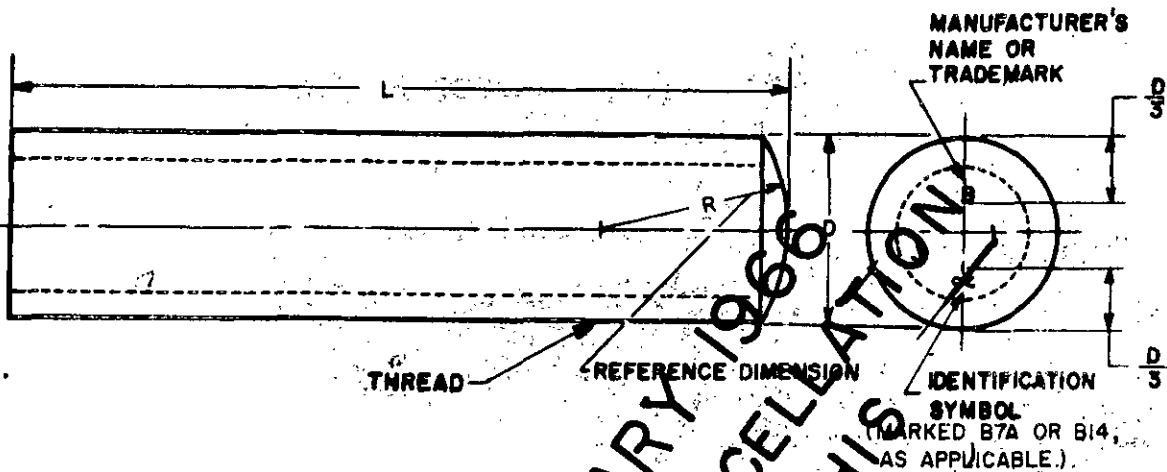

Nominal Size (D)		1/16		1/2	
Threads per inch		14UNC-2A		13UNC-2A	
Radius (R) REF.		0.4375		0.5000	
Length L	Tolerance	Dash	FIN.	Dash No.	FIN.
1.50		1		27	
2.00		2		28	
2.125		3		29	
2.250		4		30	
2.375		5		31	
2.500		6		32	
2.625		7		33	
2.750		8		34	
2.875		9		35	
3.000		10		36	
3.250		11		37	
3.500		12		38	
3.750		13		39	
4.000		14		40	
4.250		15		41	
4.500		16		42	
4.750		17		43	
5.000		18		44	
5.500		19		45	
6.000		20		46	
6.500		21		47	
7.000		22		48	
7.500		23		49	
8.000		24		50	
8.500		25		51	
9.000		26		52	

PROJECT 5307-0040

CUSTOMERS  
Ships

OTHER INT.  
A - CEQSig  
N - MCORY

**MILITARY STANDARD**

STUDS (BOLT-STUDS), CONTINUOUS THREAD, B7A  
AND B14 ALLOY STEEL, HIGH TEMPERATURE  
SERVICE, 875° F. MAXIMUM

**MS15824**

Procurement Specification  
MIL-S-1222

(A)

SHEET 1 OF 4

APPROVED 6 JUL 1956 REVISED (A) 29 FEB 1957 (B) 25 JANUARY 1966

NOTES: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by applicants or otherwise as an assumption of liability on the part of the Government for any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.