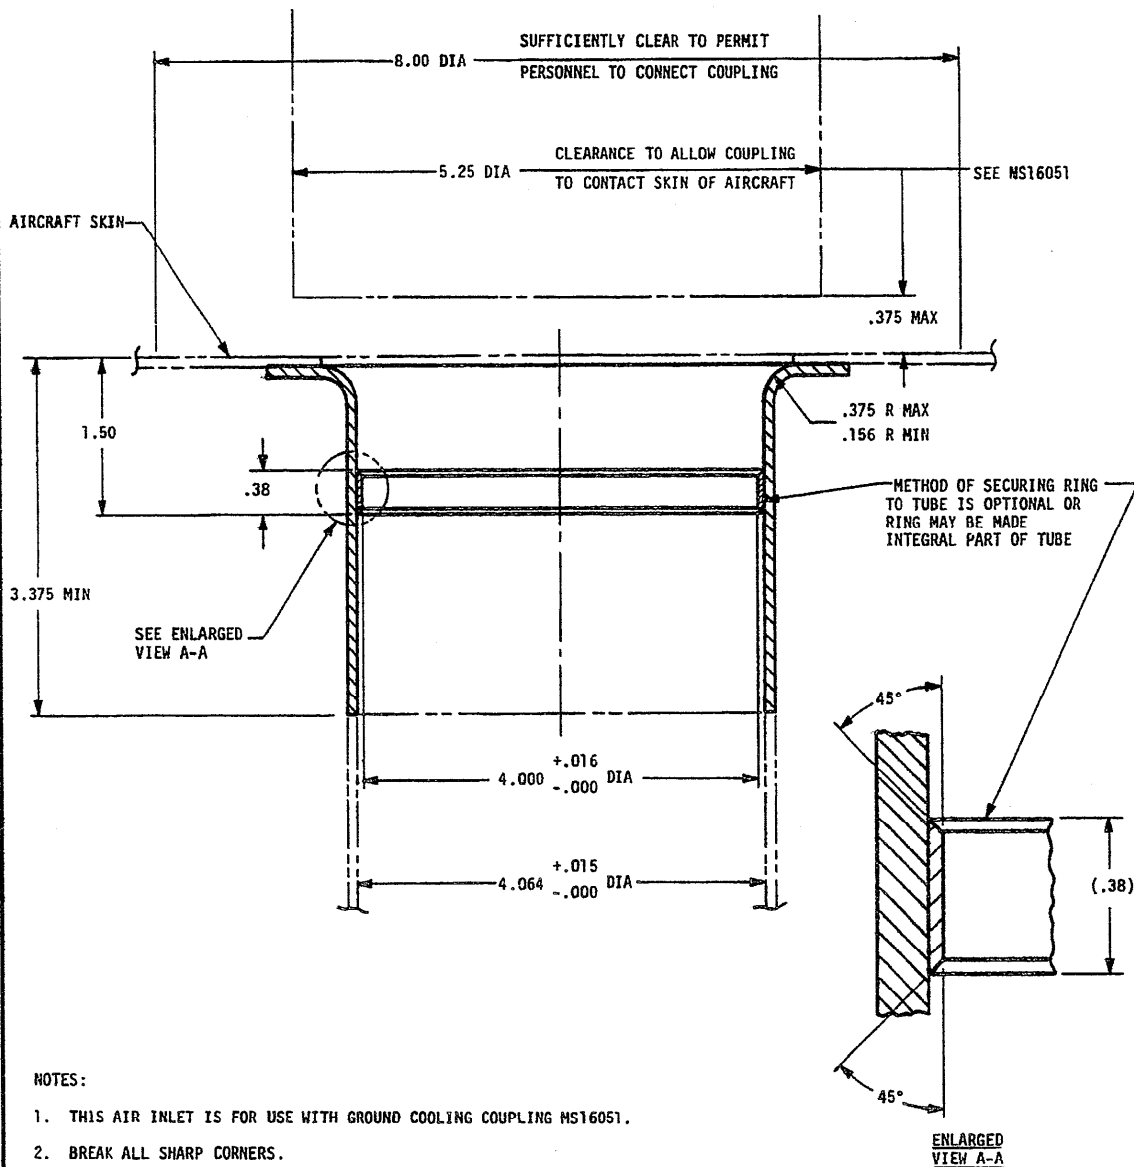


FED. SUP CLASS  
1660

## NOTES:

1. THIS AIR INLET IS FOR USE WITH GROUND COOLING COUPLING MS16051.
2. BREAK ALL SHARP CORNERS.
3. DIAMETERS SHALL BE CIRCULAR AND CONCENTRIC WITHIN .015 FULL INDICATOR READING.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS  $\pm .03$ , ANGLES  $\pm 2^\circ$ .

CERTAIN PROVISIONS OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 3208. WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

(B) REVISED AND REDRAWN

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.  
This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY — AS Other Cust	TITLE  AIR INLET, COMBAT AIRCRAFT, GROUND COOLING	MILITARY STANDARD	
		MS16052(AS)	
PROCUREMENT SPECIFICATION	SUPSEDES:	SHEET 1	OF 1