


USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document.
For future coordination of changes to this document, draft circulation
should be based on the information in the current DODISS."

This military standard is approved for use by all Departments
& Agencies of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall
be made from this document.

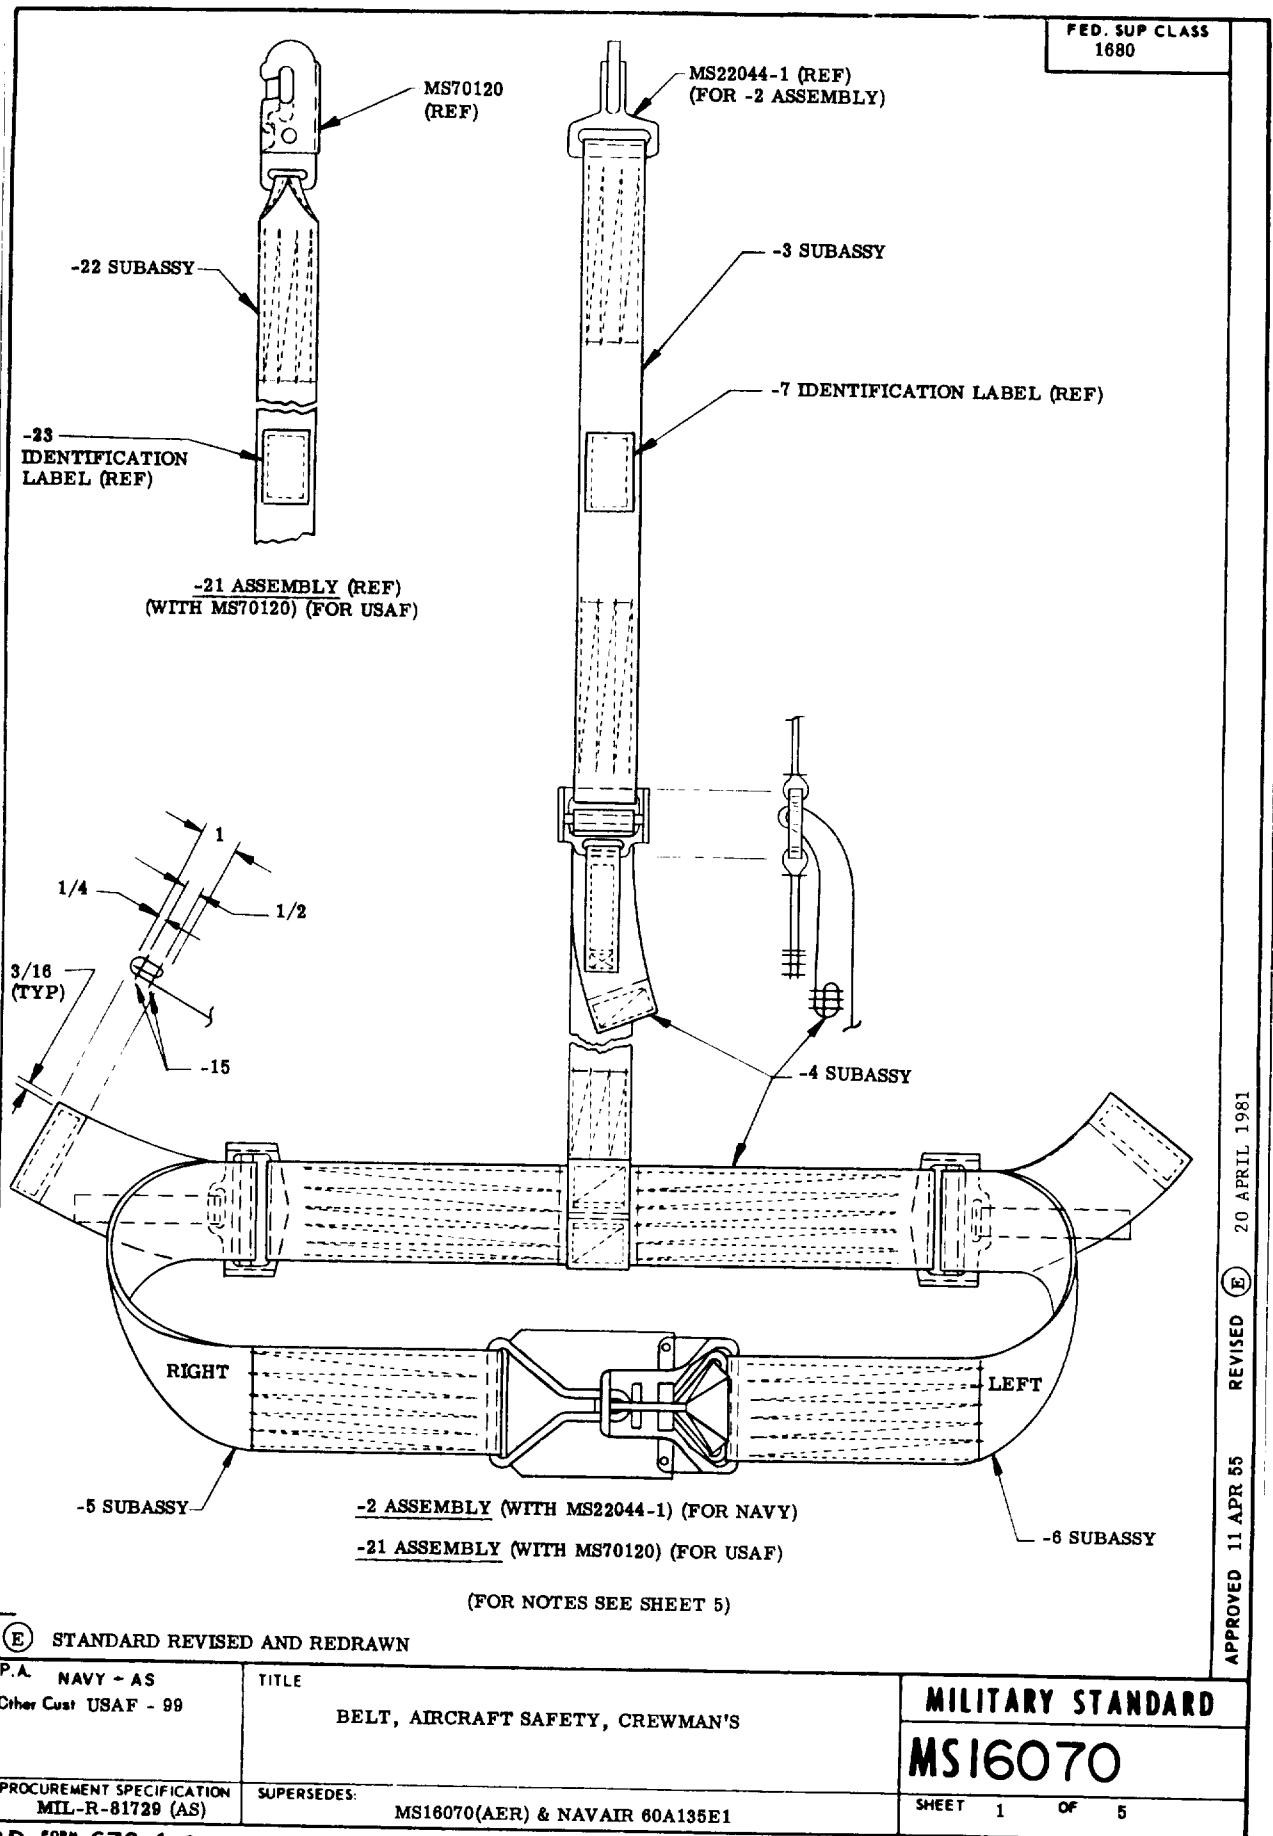


USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document.
For future coordination of change to this document, draft circulation
should be based on the information in the current DODISS."

This military standard is approved for use by all Departments
in Agencies of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall
be made from this document.

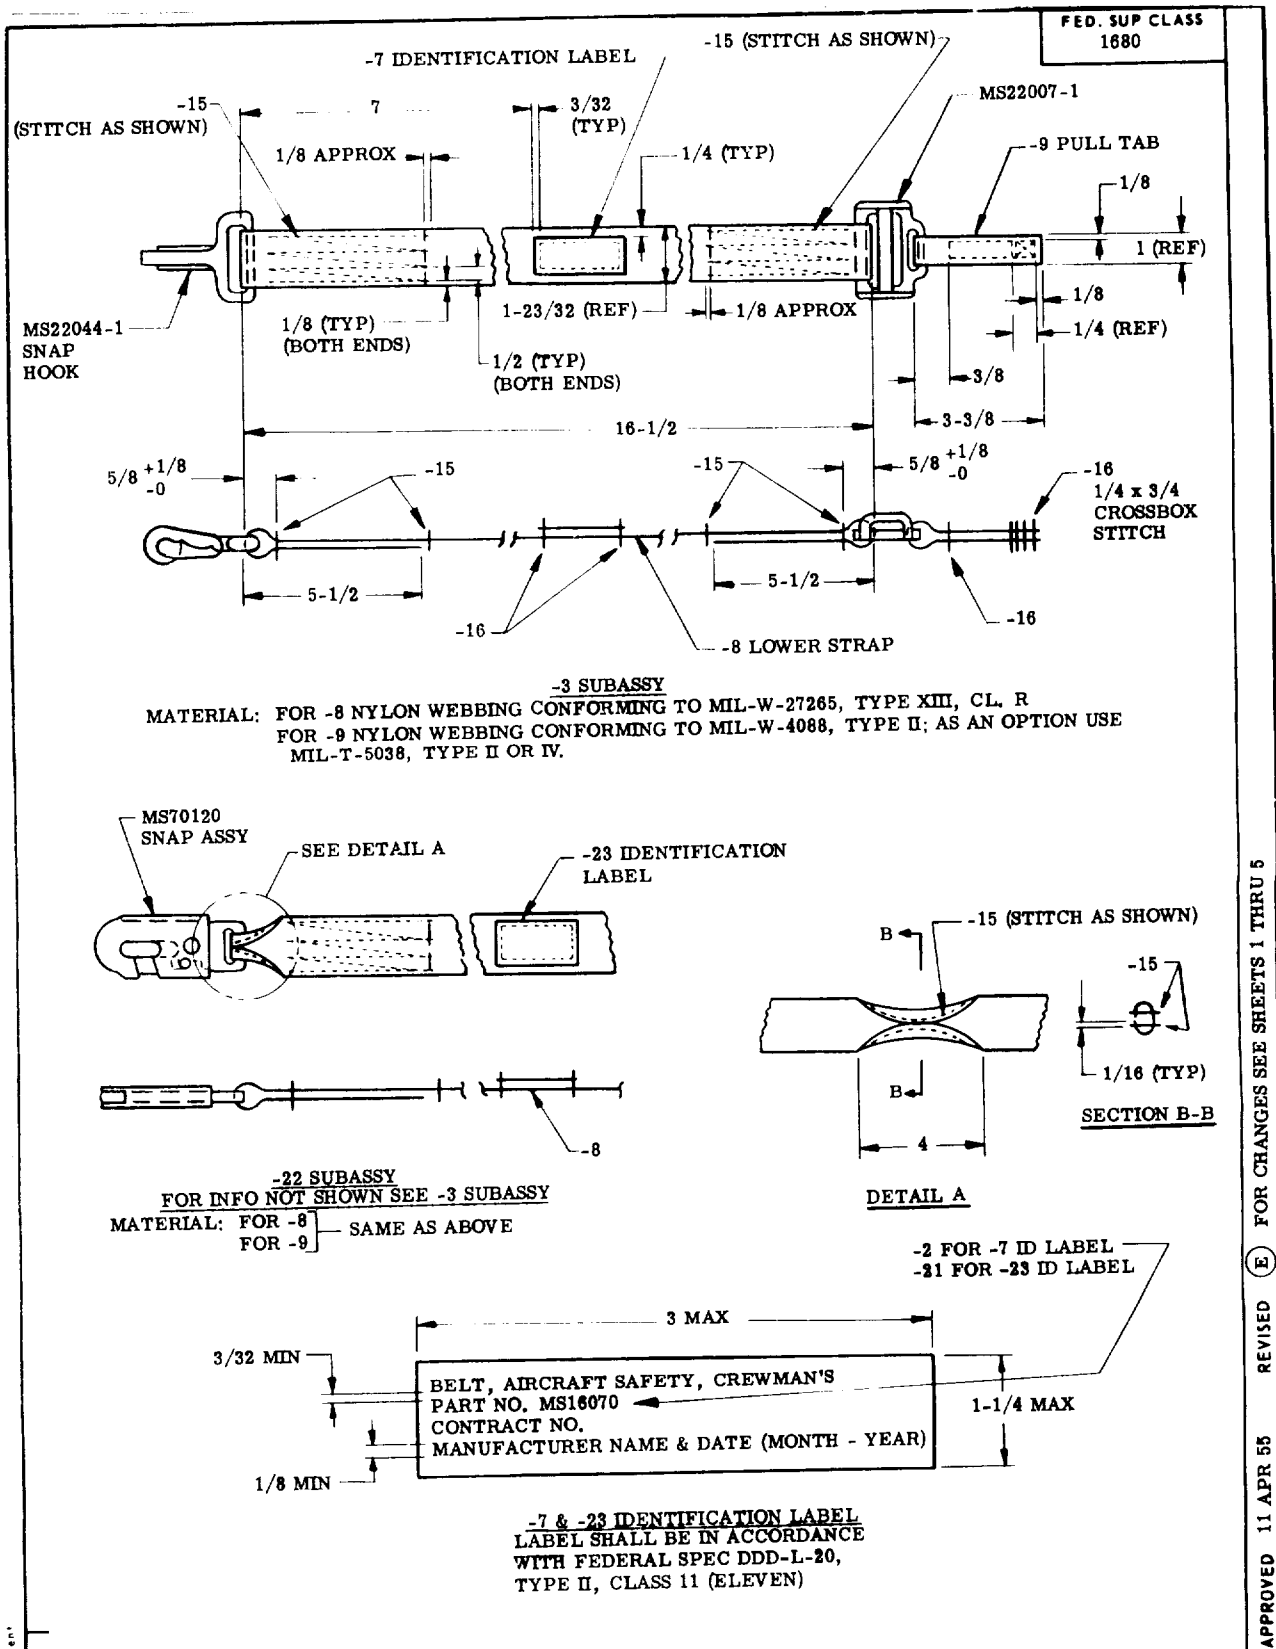

APPROVED 11 APR 55 REVISED E FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	MS16070
		SHEET 2 OF 5


FED. SUP CLASS
1680

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document.
For future coordination of changes to this document, draft circulation
should be based on the information in the current DODISS."

This military standard is approved for use by all Departments
B Agencies of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall
be made from this document

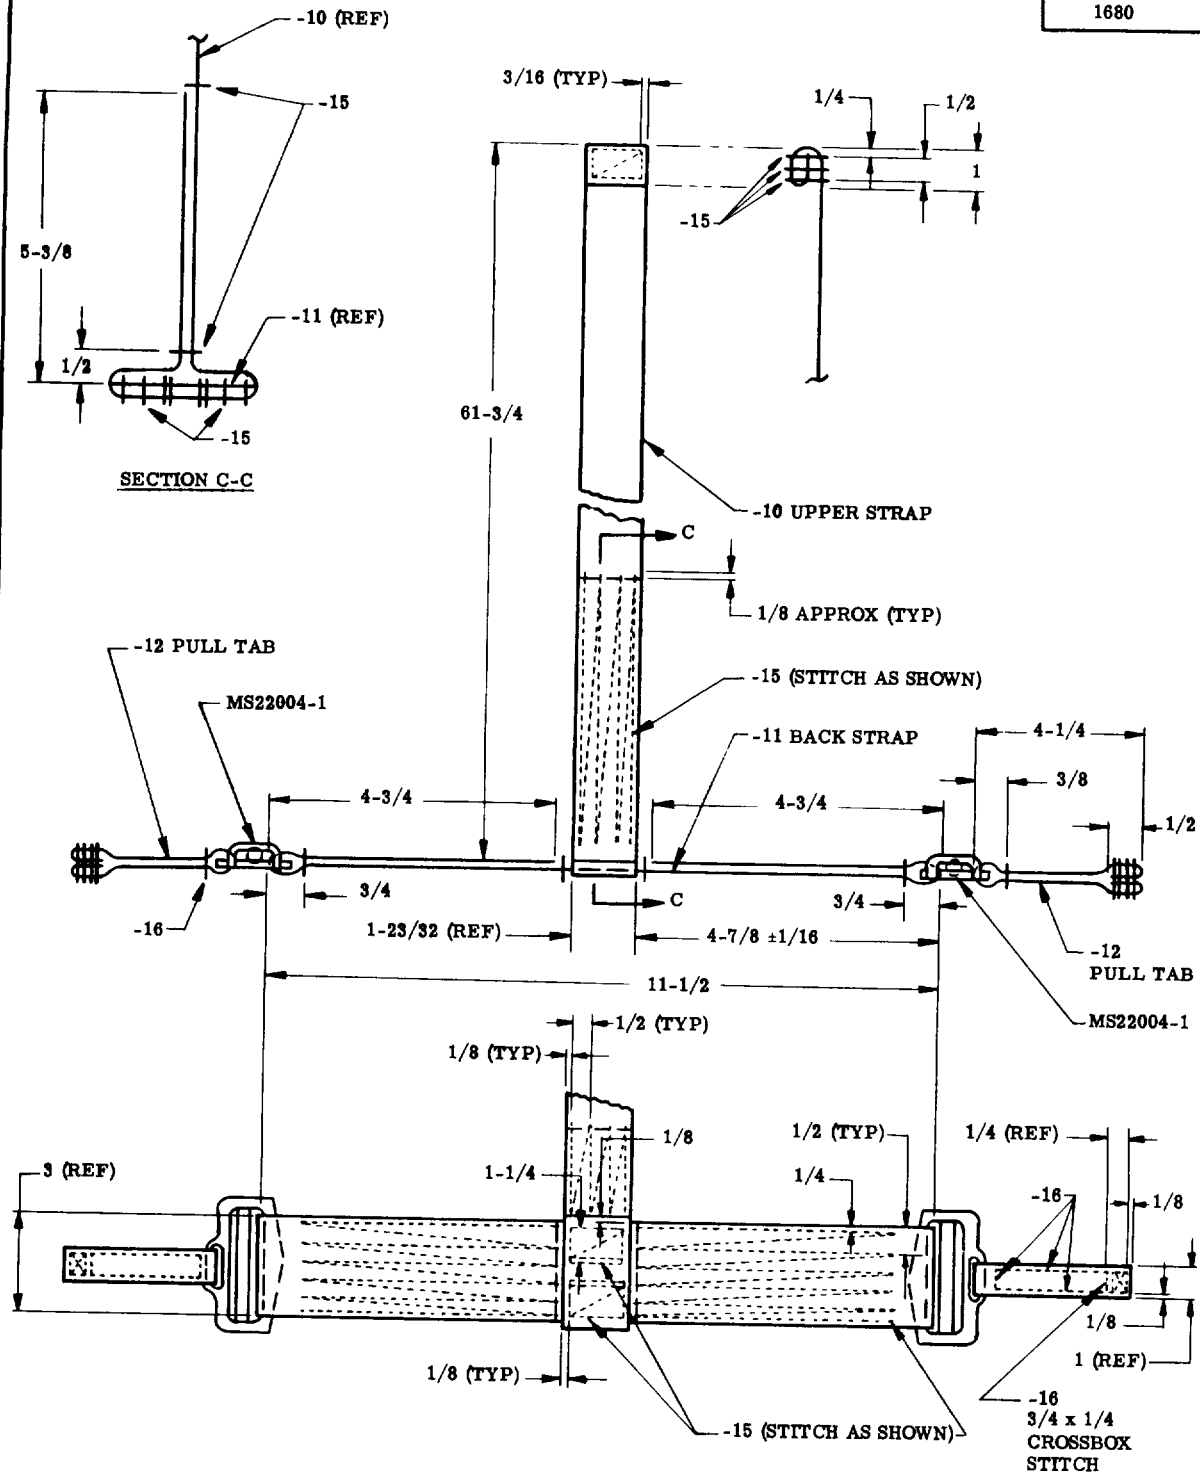

MATERIAL: FOR -10 NYLON WEBBING CONFORMING TO MIL-W-27265, TYPE XIII, CL. R.
FOR -11 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE IX.
FOR -12 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE II.

-4 SUBASSY

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	MS16070
SHEET 3 OF 5		


DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 23065

APPROVED 11 APR 55 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. See section for all new engineering and design applications and for repetitive use shall be made from this document.

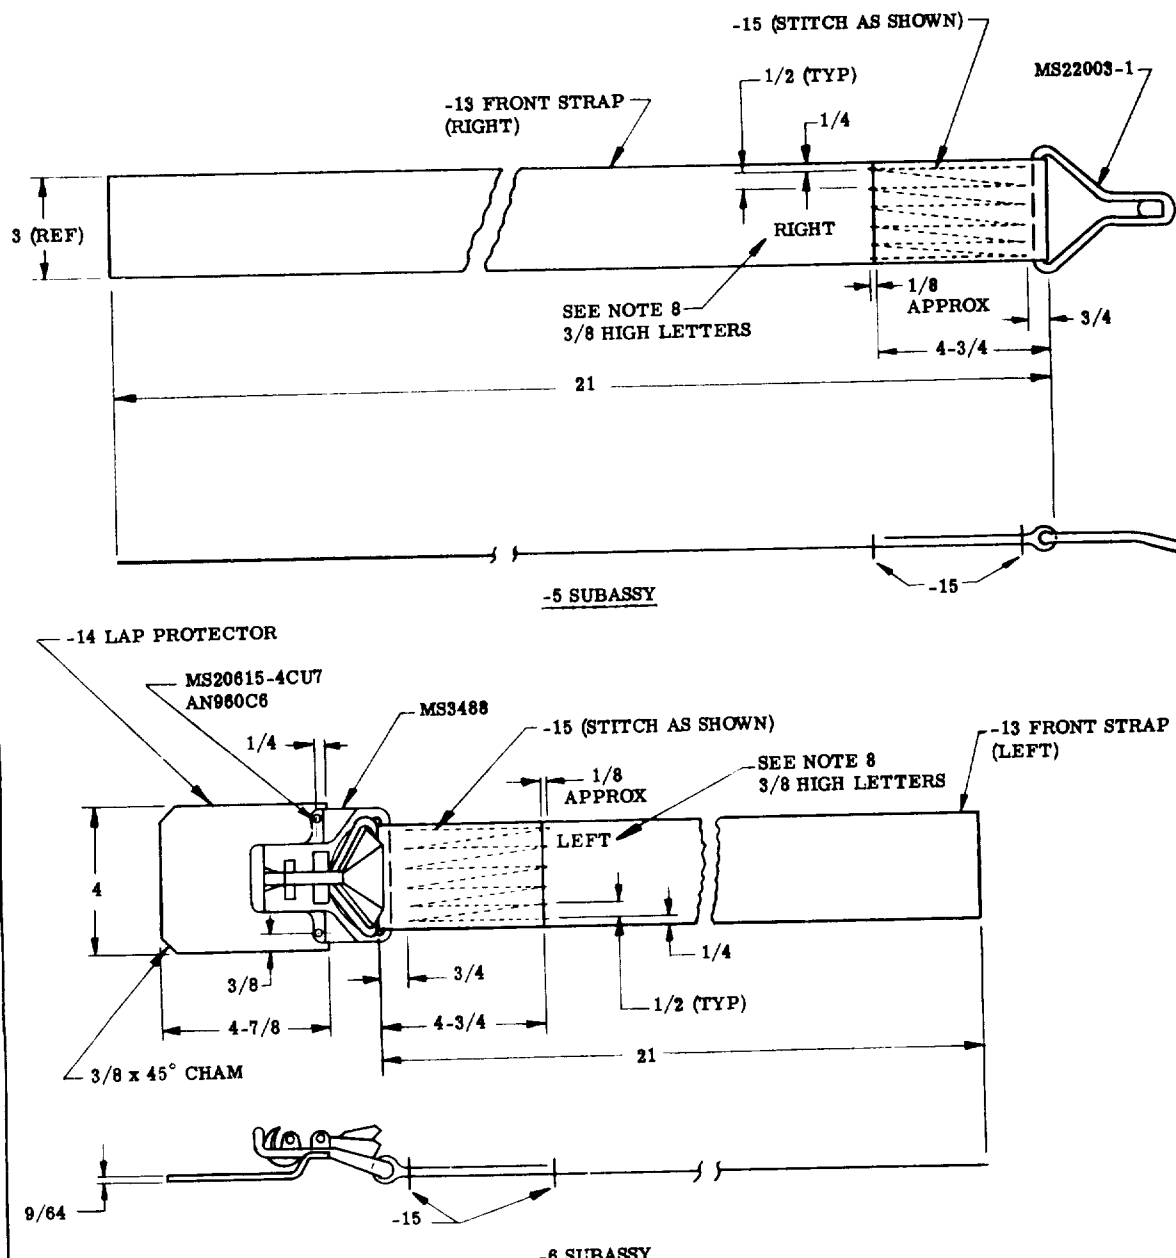

MATERIAL: FOR -13 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE IX.
FOR -14 LEATHER CONFORMING TO KK-L-271, CL 3 OR 4, SEL. C, AND SHALL BE FUNGUS
PROOFED WITH A 0.25 ±.05 PER CENTER PARA - NITROPHENOL BASED ON DRY
WEIGHT OF THE LEATHER. COLOR: RUSSET.

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES MS16070(AER) & NAVAIR 80A135E1	SHEET 4 OF 5

PLATE NO 2306

RECEIVED 11 APR 65 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 5

FED. SUP CLASS
1680

NOTES:

1. MATERIAL SHALL BE AS SPECIFIED FOR APPLICABLE PART NO., EXCEPT -15 (CORD) TO BE NYLON, V-T-295, TYPE I, CLASS B, SIZE 6; AND -16 (THREAD) TO BE NYLON, V-T-295, TYPE I, CLASS B, SIZE E. AS AN OPTION -15 AND -16 MAY BE TYPE II. (SEE NOTES 2 AND 3.)
2. ALL MACHINE STITCHING SHALL BE IN ACCORDANCE WITH FED STD 751, STITCH TYPE 301. FOR -15 (CORD) 4 TO 6 STITCHES PER INCH (SEE NOTE 1); FOR -16 (THREAD) 8 TO 10 STITCHES PER INCH (SEE NOTE 1).
3. COLOR FOR -15 AND -16 SHALL APPROXIMATELY MATCH SAGE GREEN CABLE NO. 66046, STANDARD COLOR CARD OF THE COLOR ASSOCIATION OF THE U.S. INC.
4. COLOR FOR -8 THRU -13 SHALL APPROXIMATELY MATCH SAGE GREEN 1531. COLOR FOR -14 SHALL BE NATURAL.
5. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.
TOLERANCES: FRACTIONS LESS THAN 4 INCHES $\pm 1/16$,
4 INCHES TO 12 INCHES $\pm 1/8$,
OVER 12 INCHES $\pm 1/4$.
6. SEAR ALL ENDS OF WEBBINGS AND TAPES TO PREVENT FRAYING. AVOID FORMING SHARP EDGES.
7. ALL EXPOSED ENDS OF STITCHING SHALL BE BACK STITCHED NOT LESS THAN 1/2 INCH. THREAD BREAKS SHALL BE STITCHED BACK OF BREAK A MINIMUM OF 1/2 INCH.
8. MARKING INK SHALL BE LAW MIL-I-6903, COLOR: BLACK AND SHALL HAVE A PH OF 5.0 TO 8.5.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	SHEET 5 OF 5