


NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

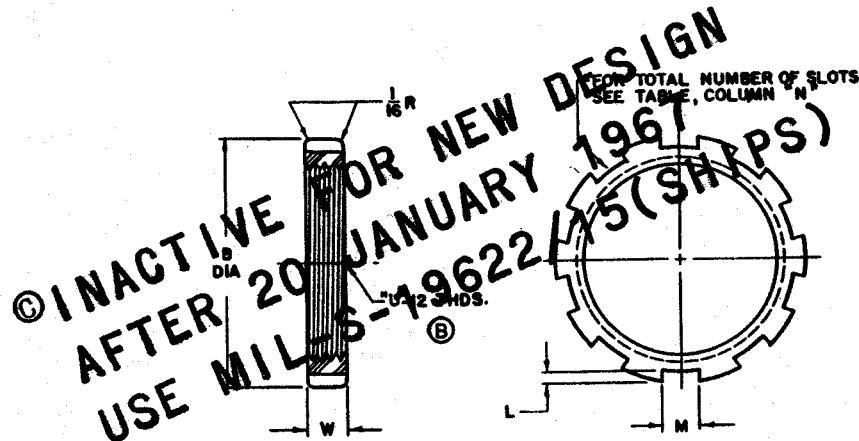

MS PART NO	TUBE SIZE	LOCKNUT DIMENSIONS					
		B	L	M	N	U	W
MS16176-209	1 & 2	1.250	.093	.250	8	$\frac{7}{8}$.250
MS16176-209A	3	1.500	.093	.250	8	$1\frac{1}{8}$.250
MS16176-210	4 OR 4T	1.625	.093	.250	8	$1\frac{1}{4}$.250
MS16176-211	5	2.500	.125	.375	10	2	.375
MS16176-212	6	3.000	.125	.500	10	$2\frac{1}{2}$.375

NOTES

1. TOLERANCES ARE ± 0.003 OR ± 0.005 PER LINEAR INCH, WHICHEVER IS GREATER, EXCEPT FOR THREADS WHICH SHALL BE HELD TO CLASS 2 FIT.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
4. TUBE SIZE SHALL BE MOLDED IN $1/8$ " HIGH RAISED LETTERS ON FACE OF LOCKNUT.

(Project 5975-N234SH)

P.A.	TITLE	MILITARY STANDARD
Other Cust	LOCKNUT, NYLON STUFFING TUBE, 90°	MS 16176 (SHIPS)
Procurement Specification MIL-S-19622	SUPERSEDES:	SHEET 1 OF 1

APPROVED 30 JAN. 1957 REVISED (A) 18 APRIL 1961 (B) 17 AUG 1962 (C) 20 January 1967