


This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS
5310

CANCELED
17 OCTOBER 1968
USE MS 35649
THIS CANCELLATION APPLIES TO ALL PAGES
OF THIS STANDARD.

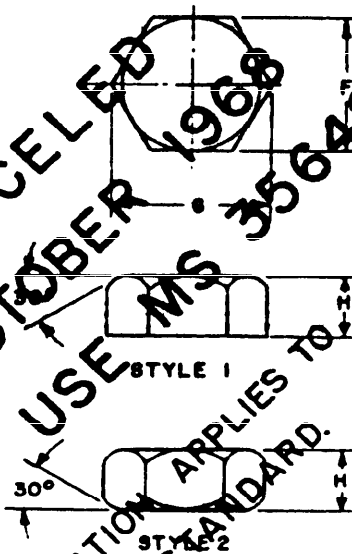

Nominal size	Width across flats (F)		Width across corners (C)		Thickness (H) Styles 1 and 2	
	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum
2	0.187	0.180	0.270	0.205	0.066	0.057
4	.250	.241	.289	.275	.098	.087
6	.312	.302	.361	.344	.114	.102
8	.343	.332	.397	.379	.130	.117
10	.375	.362	.433	.413	.130	.117
1/4	.437	.423	.505	.482	.193	.178
5/16	.500	.483	.570	.551	.225	.208
3/8	.562	.543	.630	.609	.257	.239

(Project 5310-N028Sh) (A) For changes see sheets 1 and 2

CUSTODIANS Ships	OTHER INT. A - N - AF -	MILITARY STANDARD		MS 16210 (SHIPS)
		NUTS, PLAIN, HEXAGON, MACHINE SCREW, UNS-2B, NONMAGNETIC		
Program Specification (A) FF-N-836		SUPERSEDES:		SHEET 1 OF 2

APPROVED 8 MAY 1957 REVISED (A) 19 AUGUST 1966 (B) 17 OCTOBER 1968