

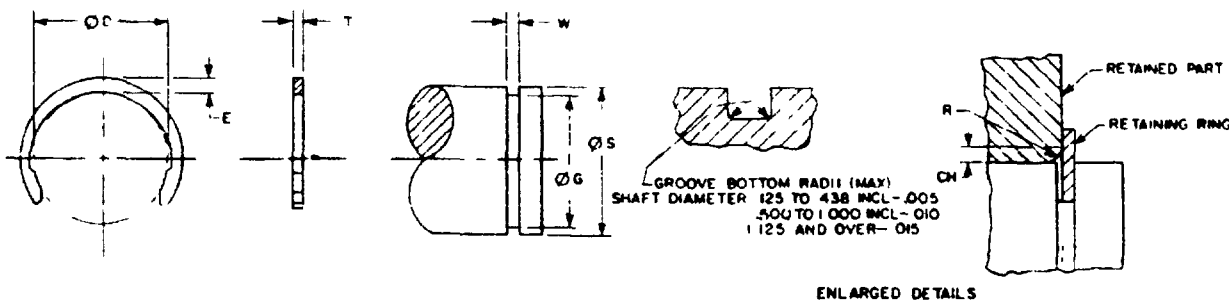
FFD SUP CLASS  
5365

TABLE I. DIMENSIONS

Ø S SHAFT (REF)		Ø D FREE		E LARGE SECTION HEIGHT		T THICKNESS		Ø G RECOMMENDED GROOVE (REF)		W WIDTH (REF)		R 3/ CH 3/ OF RETAINED PART (REF)	
INCH	MM	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	MAX	MAX
.125	3.2	.102	+ .002	.031		.015		.106	+ .0015	.020	+ .002	.014	.011
.156	4.0	.131	- .004	.037	+ .003	.015		.135	- .0015	.020	- .000	.018	.014
.188	4.8	.161		.042		.015		.165	FIM 2/	.020		.021	.016
.219	5.6	.187		.044		.025		.193		.030		.021	.016
.236	6.0	.203		.046		.025		.208		.030		.022	.017
.250	6.4	.211		.050		.025		.220		.030		.023	.018
.281	7.1	.242		.052		.025		.247	+ .002	.030		.021	.016
.312	7.9	.270	+ .003	.053	+ .004	.025		.276	.002	.030		.024	.018
.375	9.5	.328	- .005	.060		.025		.335	FIM 2/	.030		.026	.020
.406	10.3	.359		.063		.025		.364		.030		.027	.021
.438	11.1	.386		.065		.025	+ .002	.393		.030		.029	.022
.500	12.7	.441		.070		.035		.450		.040	+ .003	.030	.023
.562	14.3	.497	+ .006	.078		.035		.507		.040	- .000	.033	.025
.625	15.9	.553		.081		.035		.563		.040		.033	.025
.688	17.5	.608		.086		.042		.619	+ .003	.047		.034	.026
.750	19.0	.665		.090		.042		.676	.004	.047		.036	.027
.812	20.6	.721	+ .007	.097		.042		.732	FIM 2/	.047		.038	.029
.875	22.2	.777		.105		.042		.789		.047		.040	.031
.938	23.8	.830		.112		.042		.843		.047		.043	.033
1.000	25.4	.887		.120		.042		.900		.047		.046	.035
1.125	28.6	.997		.135		.050		1.013		.056		.052	.040
1.250	31.7	1.110	+ .008	.150		.050		1.126	+ .004	.056	+ .004	.057	.044
1.375	34.9	1.220		.165	+ .007	.050		1.237	.005	.056	- .000	.062	.048
1.500	38.1	1.331		.180		.050		1.350	FIM 2/	.056		.069	.053
1.750	44.4	1.555	+ .010	.210		.062	+ .003	1.576	+ .005	.068		.081	.062
2.000	50.8	1.777		.240		.062		1.800	.005	.068		.091	.070

- 1/ THICKNESS "T" APPLIES TO UNPLATED RINGS. FOR CORROSION RESISTANT STEEL AND PLATED RINGS, +.002 SHOULD BE ADDED TO THE MAXIMUM TOLERANCE, i.e. +.002 SHOULD BE +.004/- .002
- 2/ FIM = (FULL INDICATOR MOVEMENT) IS THE MAXIMUM ALLOWABLE DEVIATION OF CONCENTRICITY BETWEEN THE GROOVE AND THE SHAFT
- 3/ R AND CH = RADIUS OR CHAMFERS ALLOWABLE ON PARTS TO BE RETAINED BY THE RING. THRUST LOADS OF RINGS, RETAINING PARTS WITH CORNER RADIUS OR CHAMFERS AS LISTED ABOVE ARE TABULATED ON PAGE 6

ⓑ ENTIRE STANDARD REVISED

PA NAVY-OS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE RING, RETAINING, EXTERNAL, CRESCENT (REDUCED SECTION TYPE)	MILITARY STANDARD MS16632
PROCUREMENT SPECIFICATION MIL-R-21248	SUPERSEDES	PAGE 1	OF 6

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is issued for use by all Departments and Agencies of the Department of Defense for design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

UNR ACTIVITIES  
ARMY-ER, GL  
NAVY-MC, SH, YD

REVIEWER ACTI  
ARMY-MI  
NAVY-AS  
AIR FORCE-82  
DLA-IS

APPROVED 11 DEC 1958 REVISED 30 APRIL 1990

5365

REQUIREMENTS

1. CLASSIFICATION. RETAINING RINGS FURNISHED UNDER THIS STANDARD SHALL BE TYPE I, CLASS 6 OF THE PROCUREMENT SPECIFICATION
2. MATERIAL:
  - (a) CARBON SPRING STEEL, GRADE 1060 THRU 1095 (UNS G10600 THRU G10950) IN ACCORDANCE WITH ASTM A568 OR ASTM A682.
  - (b) CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5520 (UNS S15700)
  - (c) BERYLLIUM COPPER ALLOY NUMBER 170 (UNS C17000) OR ALLOY NUMBER 172 (UNS C17200) IN ACCORDANCE WITH ASTM B194
3. HARDNESS

TABLE II HARDNESS

Ø SHAFT (REF)	CARBON STEEL	CORROSION RESISTANT STEEL	BERYLLIUM COPPER
.125 TO .438 INCL	84 5-87.0 HR15N $\frac{1}{2}$	82 5-86 HR15N $\frac{1}{2}$	77-82 HR15N $\frac{1}{2}$
.500 TO .625 INCL	66 5-71 5 HR30N $\frac{1}{2}$	67-69 5 HR30N $\frac{1}{2}$	54-62 HR30N $\frac{1}{2}$
.688 TO 1.000 INCL	52 5-58 5 HR45N $\frac{1}{2}$	48-56 HR45N $\frac{1}{2}$	36-47 HR45N $\frac{1}{2}$
1.125 TO 2.000 INCL	48-53 HRC	44-51 HRC	34-43 HRC

$\frac{1}{2}$  USE HIGHEST SCALE TO PROVIDE SECTION WIDTH EQUAL TO OR GREATER THAN 5 TIMES THE BRAILLE IMPRESSION DIAMETER

4. PROTECTIVE FINISH OR SURFACE TREATMENT:

- (a) CARBON STEEL - SHALL BE AS SPECIFIED (SEE TABLE III OR IV)
  - (1) CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE I., CLASS 3 OR ASTM B696, TYPE II, CLASS 5
  - (2) ZINC COAT IN ACCORDANCE WITH ASTM B633, TYPE 1., CLASS Fe, Zn5, OR ASTM B695, TYPE II, CLASS 5
  - (3) PHOSPHATE COAT IN ACCORDANCE WITH DOD-P-16232, TYPE 2, CLASS 2
- (b) CORROSION RESISTANT STEEL - SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH QQ-P-35

5. PART NUMBER THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE III OR IV

EXAMPLE MS16632-1100 IS THE PART NUMBER FOR A CARBON STEEL CADMIUM PLATE, EXTERNAL, CRESCENT RETAINING RING FOR USE ON A 1.000 DIAMETER SHAFT.

NOTES:

- 1 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES
- 2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE
- 3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

PA  
NAVY-OS  
ARMY-AR  
AIR FORCE-99

INTERNATIONAL  
UNITES

RING, RETAINING, EXTERNAL, CRESCENT  
(REDUCED SECTION TYPE)

PROCUREMENT SPECIFICATION  
MIL-R-21248

SUPERSEDES

MILITARY STANDARD  
MS16632

PAGE 2 OF 6

REVISED 11 DEC 1958  
FOR CHANGES SEE PAGES 1 THRU 6

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited  
This military standard is approved for use by all Departments and Agencies of the Department of Defense  
Solicitation for advice, engineering and design applications and for future use shall be made from this document when applicable

USER ACTIVITIES  
ARMY-ER, GL  
NAVY-MC, SH, YD

REVIEWER ACTIVITIES  
ARMY-MI  
NAVY-AS  
AIR FORCE-82  
DLA-IS

AMSC N/A

DD 672-1

5365-0127

TABLE III DASH NUMBERS FOR MS16632

Ø S SHAFT (REF)	CARBON STEEL $\frac{1}{2}$ / CADMIUM PLATE	CARBON STEEL $\frac{1}{2}$ / ZINC COAT	CARBON STEEL $\frac{1}{2}$ / PHOSPHATE COAT	STEEL CORROSION RESISTANT	BERYLLIUM COPPER $\frac{1}{2}$ /
	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
.125	-1012	-2012	-3012	-4012	-5012
.156	-1015	-2015	-3015	-4015	-5015
.188	-1018	-2018	-3018	-4018	-5018
.219	-1021	-2021	-3021	-4021	-5021
.236	-1023	-2023	-3023	-4023	-5023
.250	-1025	-2025	-3025	-4025	-5025
.281	-1028	-2028	-3028	-4028	-5028
.312	-1031	-2031	-3031	-4031	-5031
.375	-1037	-2037	-3037	-4037	-5037
.406	-1040	-2040	-3040	-4040	-5040
.438	-1043	-2043	-3043	-4043	-5043
.500	-1050	-2050	-3050	-4050	-5050
.562	-1056	-2056	-3056	-4056	-5056
.625	-1062	-2062	-3062	-4062	-5062
.688	-1068	-2068	-3068	-4068	-5068
.750	-1075	-2075	-3075	-4075	-5075
.812	-1081	-2081	-3081	-4081	-5081
.875	-1087	-2087	-3087	-4087	-5087
.938	-1093	-2093	-3093	-4093	-5093
1.000	-1100	-2100	-3100	-4100	-5100
1.125	-1112	-2112	-3112	-4112	-5112
1.250	-1125	-2125	-3125	-4125	-5125
1.375	-1137	-2137	-3137	-4137	-5137
1.500	-1150	-2150	-3150	-4150	-5150
1.750	-1175	-2175	-3175	-4175	-5175
2.000	-1200	-2200	-3200	-4200	-5200

\* SUBSTITUTED CORROSION RESISTANT STILL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited  
This Military Standard is approved for use by all Departments and Agencies of the Department of Defense  
This Military Standard is for all new engineering and design applications and for repetitive use shall be made from this document when applicable

REVIEWER ACTI  
ARMY-MI  
NAVY-AS  
AIR FORCE-82  
DLA-IS

USER ACTIVITIES  
ARMY-ER, GL  
NAVY-MC, SH, YD

APPROVED 11 DEC 1958 REVISED (B) FOR CHANGES SEE PAGES 1 THRU 6

PA NAVY-OS Time Cut	INTERNATIONAL INVENT	TITLE RING, RETAINING, EXTERNAL, CRESCENT (REDUCED SECTION TYPE)	MILITARY STANDARD MS16632
PROCURMENT SPECIFICATION MIL-R-21248	SUPERSEDES	PA 3	OF 6

EQ. UP. AS.  
5365

TABLE IV. SUBSTITUTION TABLE (CROSS REFERENCE OF PART NUMBERS)

Q S SHAFT (REF)	INACTIVE	SUBSTITUTE	SUBSTITUTE	SUBSTITUTE
	CARBON STEEL	CARBON STEEL 1/ CADMIUM PLATE	CARBON STEEL 1/ ZIN. COAT	CARBON STEEL 1/ PHOSPHATE COAT
	MS16632	MS16632	MS16632	MS16632
.25	-12	-1012	-2012	-3012
.156	-15	-1015	-2015	-3015
.188	-18	-1018	-2018	-3018
.219	-21	-1021	-2021	-3021
.236	-23	-1023	-2023	-3023
.250	-25	-1025	-2025	-3025
.281	-28	-1028	-2028	-3028
.312	-31	-1031	-2031	-3031
.375	-37	-1037	-2037	-3037
.406	-40	-1040	-2040	-3040
.438	-43	-1043	-2043	-3043
.500	-50	-1050	-2050	-3050
.562	-56	-1056	-2056	-3056
.625	-62	-1062	-2062	-3062
.688	-68	-1068	-2068	-3068
.750	-75	-1075	-2075	-3075
.812	-81	-1081	-2081	-3081
.875	-87	-1087	-2087	-3087
.938	-93	-1093	-2093	-3093
1.000	-100	-1100	-2100	-3100
1.25	-125	-1125	-2125	-3125
1.250	-125	-1125	-2125	-3125
1.375	-137	-1137	-2137	-3137
1.500	-150	-1150	-2150	-3150
1.750	-175	-1175	-2175	-3175
2.000	-200	-1200	-2200	-3200

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN PULP OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C)

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense

Selection for all new, existing, and design applications and for repetitive use shall be made from this

list when applicable

REVIEWER ACTIVITIES

ARMY-MI  
NAVY-AS  
AIR FORCE-82  
DLA-IS

USER ACTIVITIES

ARMY-ER, GL  
NAVY-MC, SH, YD

NAVY-OS  
INTERNATIONAL  
INTEREST  
Other Cost  
ARMY-AR  
AIR FORCE-99  
PROCUREMENT SPECIFICATION  
MIL-R-21248

RING, RETAINING, EXTERNAL, CRESCENT  
(REDUCED SECTION TYPE)

SUPERSEDES

MILITARY STANDARD  
MS16632

PAGE 4 OF 6

APPROVED 11 DEC 1958 REVISED (B) FOR CHANGES SEE PAGES 1 THRU 6

AMSC N/A

DD 672-1

5365-0127

FED SUP CLASS  
5365

## RECOMMENDED DESIGN LIMITATIONS AND USAGE

- (a) INTENDED USE - TO PROVIDE SHOULDERS FOR POSITIONING AND MAINTAINING MACHINE PARTS ON SHAFTS WHICH ARE AXIALLY INACCESSIBLE IN ASSEMBLY. THEY ARE APPLIED RADIALLY AND BECAUSE OF DEEP GROOVES, HAVE HIGH THRUST CAPACITY. THEY ARE OF ADVANTAGE WHERE FAST ASSEMBLY FOR MASS PRODUCTION LINES IS ESSENTIAL AND WHERE COMPATIVELY SMALL CLEARANCE DIAMETERS ARE DESIRABLE. THE USE OF THE FOLLOWING FORMULAS ARE BASED ON THE FACT THAT THE RING MATERIAL WILL NOT FAIL IN COMPRESSION.

LIMITATION ON USE - THE FOLLOWING FORMULAS ARE NOT TO BE USED FOR BRITTLE MATERIALS SUCH AS CAST IRON, ETC.

WARNING - RINGS SHALL NOT BE OVER EXPANDED DURING INSTALLATION SINCE THIS WILL LEAD TO RING FAILURE. IF RING HAS PLAY BETWEEN THE GROOVE DIAMETER AND THE INSIDE RING DIAMETER THIS INDICATES THAT THE RING HAS BEEN OVER EXPANDED, (PROVIDING GROOVE HAS BEEN MACHINED TO RECOMMENDED DIMENSIONS)

FOR APPROXIMATE SAFETY RPM LIMITS SEE TABLE V.

TABLE V APPROXIMATE SAFETY RPM LIMITS

Ø SHAFT (INCHES)		.250	500	1.000	2.000
CARBON STEEL AND CORROSION RESISTANT STEEL	RPM LIMIT	60,000	25,000	12,500	6,000
BERYLLIUM COPPER	RPM LIMIT	30,000	16,000		

- (b) ALLOWABLE THRUST LOAD CAPACITY OF THE RING. (ASUTING COMPONENTS TO HAVE SHARP CORNERS) =

$$P = \frac{WSTX}{2F}$$

WHERE

P = ALLOWABLE THRUST LOAD (POUNDS)  
S = SHAFT DIAMETER (INCHES)  
T = RING THICKNESS (INCHES)  
X = ULTIMATE SHEAR STRENGTH OF THE RING MATERIAL (PSI)  $\frac{1}{2}$   
F = FACTOR OF SAFETY

A SAFETY FACTOR, F = 4, IS RECOMMENDED, SINCE THE RING UNDER LOAD IS SUBJECTED NOT ONLY TO PURE SHEAR STRESSES, BUT ALSO TO BENDING STRESSES

- (c) ALLOWABLE LOAD CAPACITY OF GROOVE WALL =

$$P = \frac{YGdY}{2F}$$

WHERE

P = ALLOWABLE COMPRESSION LOAD (POUNDS)  
G = GROOVE DIAMETER (INCHES)  
d = GROOVE DEPTH (INCHES)  
Y = YIELD STRENGTH OF COMPRESSION IN THE GROOVE MATERIAL (PSI)  
F = FACTOR OF SAFETY

TO INSURE A SAFE WORKING LOAD, A SAFETY FACTOR, F = 2, IS RECOMMENDED

- (d) MINIMUM DISTANCE BETWEEN OUTER GROOVE WALL AND END OF SHAFT =

$$Z = 2d$$

WHERE

Z = MINIMUM DISTANCE BETWEEN OUTER GROOVE WALL AND END OF SHAFT (INCHES)  
d = GROOVE DEPTH (INCHES)

- (e) DIFFERENTIAL ROTATION =

THE CONDITIONS UNDER WHICH A RETAINING RING MAY BE USED WHEN ADJACENT PARTS ROTATE RELATIVE TO IT FALL INTO TWO CATEGORIES

- (1) WHERE NO THRUST IS EXERTED BY ADJACENT PART, IN THIS CASE, DIFFERENTIAL ROTATION OF RING AND ADJACENT PART CREATES NO ELEMENT OF RISK IN THE APPLICATION OF THE RINGS BECAUSE NO FUNCTIONAL TORQUE IS EXERTED BY THE MACHINE PART ON THE RING.
- (2) CONSIDERATION MUST BE GIVEN TO THE MAGNITUDE OF THE THRUST INVOLVED. THE FRICTION MOMENT MAY NOT EXCEED THE BENDING MOMENT, WHICH THE RING CAN TOLERATE WITHOUT RELEASING ITS PRESSURE AGAINST THE BOTTOM OF THE GROOVE, FORMULATED AS FOLLOWS

$$FPM \leq \frac{STL^2}{18} \quad \text{OR} \quad P \leq \frac{S \cdot d^2}{f18N}$$

WHERE

P = ALLOWABLE THRUST LOAD EXERTED BY ADJACENT PART (POUNDS)  
f = COEFFICIENT OF FRICTION  
S = WORKING STRESS OF RING UNDER MAXIMUM EXPANSION (PSI)  $\frac{1}{2}$   
T = RING THICKNESS (INCHES)  
L = LARGEST WIDTH SECTION OF RING (INCHES)  
N = INTERNAL RING DIAMETER (INCHES) + FREE DIAMETER PLUS  $\frac{1}{2}L$  & DIMENSION

IF A DIFFERENTIAL ROTATION OCCURS, THE CALCULATION SHOULD BE BASED ON THE MAXIMUM POSSIBLE VALUE OF THE COEFFICIENT OF FRICTION

- $\frac{1}{2}$  X = 120,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS UP TO AND INCLUDING .625 INCH SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
- X = 150,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS .688 INCH AND OVER SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
- X = 110,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS OF ALL SHAFT DIAMETERS AND OF BERYLLIUM COPPER.
- S = 250,000 PSI WORKING STRESS FOR RINGS OF CARBON STEEL OR CORROSION RESISTANT STEEL.
- S = 180,000 PSI WORKING STRESS FOR RINGS OF BERYLLIUM COPPER.

PA NAVY-OS Other Govt ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE RING, RETAINING, EXTERNAL, CRESCENT (REDUCED SECTION TYPE)	MILITARY STANDARD MS16632
PROCUREMENT SPECIFICATION MIL-R-21248	SUPPLIES OF	FIG 5	6

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited  
This military land is provided for use by all Departments and Agencies of the Department of Defense  
without charge for all new and existing and design applications and for repetitive use shall be made from this document when applicable

USER ACTIVITIES  
ARMY-ER, GL  
NAVY-MC, SH, YD  
DLA-IS

REVIEWER AC  
ARMY-MI  
NAVY-AS  
AIR FORCE-82  
DLA-IS

FOR CHANGES SEE PAGES 1 THRU 6

REVISED

11 DEC 1958

APPROVED

AMSC N/A

DD 672-1

5365-C127

FED SUP CLASS  
5365

## (f) IMPACT CAPACITY OF RING OR GROOVE WALL -

$$I_R = \frac{PT}{2} - \text{FOR THE RING (INCH POUNDS) (ABUTTING COMPONENTS TO HAVE SHARP CORNERS)}$$

$$I_G = \frac{Pd}{2} - \text{FOR THE GROOVE (INCH POUNDS)}$$

WHERE:

P = ALLOWABLE THRUST LOAD OF RING OR GROOVE (POUNDS)  
 T = RING THICKNESS (INCHES)  
 I<sub>G</sub> = IMPACT CAPACITY OF GROOVE WALL (INCH POUNDS)  
 d = GROOVE DEPTH (INCHES)  
 I<sub>R</sub> = IMPACT CAPACITY OF RING (INCH POUNDS)

## (g) LOAD CAPACITY WITH THE RETAINED PART RADIUS OR CHAMFERED -

WHEN THE RADIUS OR CHAMFER OF THE RETAINED PART DOES NOT EXCEED THE MAXIMUM RADIUS ALLOWED FOR THE BOTTOM OF THE RING GROOVE, THE LESSER LOAD CAPACITY COMPUTED FROM THE FORMULA ON PAGE 5 WILL APPLY. THE CORNER RADIUS AND CHAMFERS LISTED ON PAGE 1 WERE CHOSEN AS LARGE AS POSSIBLE FOR THE RING SIZES INVOLVED AND ARE RELATED TO THE MAXIMUM THRUST LOADS LISTED IN TABLE VI. IF THE CORNER RADIUS OR CHAMFERS ARE SMALLER THAN THOSE LISTED, THEN THE THRUST LOADS INCREASE PROPORTIONALLY IN ACCORDANCE WITH THE FOLLOWING FORMULAS:

$$P^1 = \frac{P \cdot CH}{CH^1} \quad \text{OR}$$

WHERE:

P<sup>1</sup> = NEW ALLOWABLE THRUST LOAD  
 P = LISTED ALLOWABLE THRUST LOAD  
 CH<sup>1</sup> = NEW (SMALLER) CHAMFER  
 CH = LISTED CHAMFER  
 R<sup>1</sup> = NEW (SMALLER) CORNER RADIUS  
 R = LISTED CORNER RADIUS

$$P^1 = \frac{P \cdot R}{R^1}$$

LIMIT LOADS LISTED IN TABLE VI ARE BASED ON RINGS OF CARBON STEEL OR CORROSION RESISTANT STEEL (WORKING STRESS 250,000 PSI). IF THE ALLOWABLE GROOVE CAPACITY LOADS AS CALCULATED BY USING THE FORMULA ON PAGE 5 ARE LESS, THEN THEY SHOULD BE USED.

TABLE VI LIMIT LOADS

NOMINAL RING SIZE		ALLOWABLE THRUST LOAD FOR RING ASSEMBLIES WITH PARTS HAVING MAXIMUM CORNER RADIUS OR CHAMFERS	
FROM	TO	CARBON STEEL OR CORROSION RESISTANT STEEL	BERYLLIUM COPPER
125		90 LB	65 LB
156		105 LB	75 LB
188		110 LB	80 LB
219		260 LB	185 LB
236		275 LB	200 LB
250		290 LB	210 LB
281	438	310 LB	220 LB
500	625	610 LB	440 LB
668	1 000	880 LB	
1 125	1 500	1250 LB	
1 750	2 000	1920 LB	

(B) FOR CHANGES SEE PAGES 1 THRU 6

REVISED

11 DEC 1958

APPROVED

PA  
NAVY-OS  
Other Govt  
ARMY-AR  
AIR FORCE-99

INTERNATIONAL  
INTEREST

TITLE

RING, RETAINING, EXTERNAL, CRESCENT  
(REDUCED SECTION TYPE)

MILITARY STANDARD

MS16632

PROCUREMENT SPECIFICATION  
MIL-R-21248

SUPERSEDES

PAGE 6 OF 6

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited  
 This military standard is approved for use by all Departments and Agencies of the Department of Defense  
 Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

USER ACTIVITIES  
ARMY-ER, GL  
NAVY-MC, SH, YD

REVIEWER ACTIVITIES  
ARMY-MJ  
NAVY-AS  
AIR FORCE-82  
DLA-IS

AMSC N/A

DD FORM 672-1

5365-0127