


H

This document was developed by the Department of Defense as the Military Standard to limit the selection of the item, product, or design covered herein to engineering, design, and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.


FED SUP CLASS
2040

$\frac{3}{4}$ CURVED BOLT

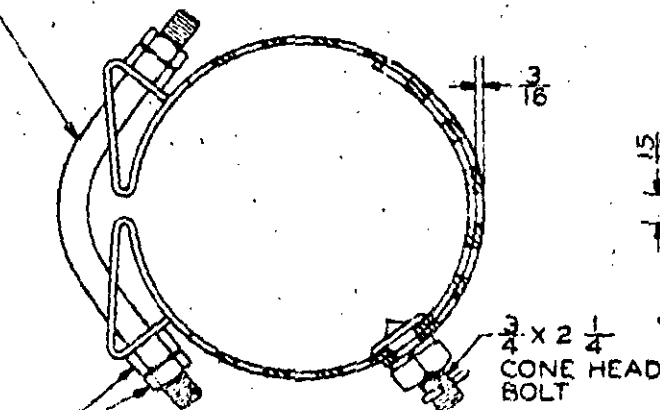

SECTION A-A

$\frac{3}{4}$ -10 NC 2
HEX NUT & LOCKNUT
2-EACH REQ.

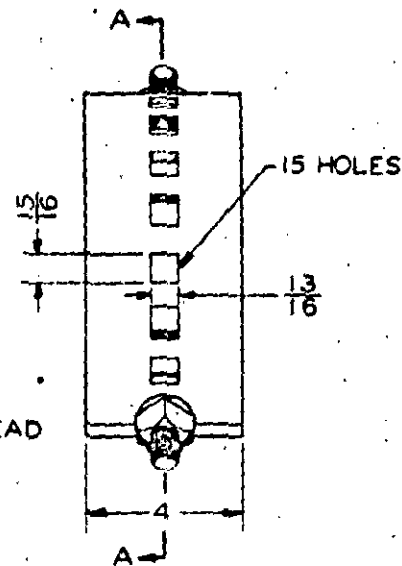

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. STEEL SHALL BE IN ACCORDANCE WITH FEDERAL SPECIFICATION QQ-S-636.
4. BOLT SHALL BE IN ACCORDANCE WITH FEDERAL SPECIFICATIONS QQ-S-633 OR QQ-W-409.
5. FINISH SHALL BE HOT DIP GALVANIZED IN ACCORDANCE WITH MILITARY SPECIFICATION MIL-2-17871.
6. ALL THREADS SHALL BE UNC-2 PER NATIONAL BUREAU OF STANDARDS PUBLICATION H-28. THREADS OF NUTS SHALL NOT BE GALVANIZED.

① CANCELLED AFTER 1 NOVEMBER 1974
NO SUPERSEDING STANDARD

ALL DIMENSIONS IN INCHES

CUSTOMERS	REF. INT.
SIGC	CS
MC	YS
USAF	AF

MILITARY STANDARD
BAND, BOOM (ADJUSTABLE)
FOR USE ON 8 INCH POLES

MS 16789

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1

APPROVED 18 July 74 1 NOV 74

S/S