
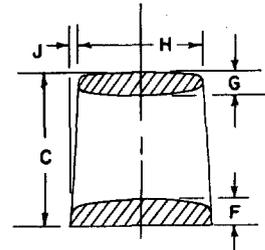
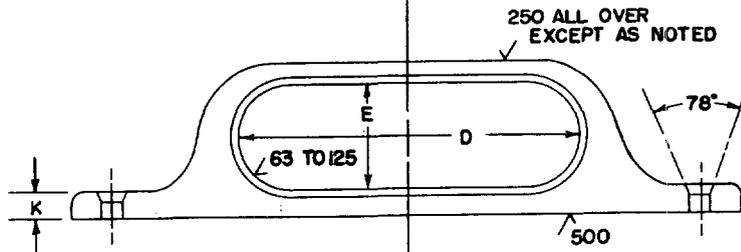


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

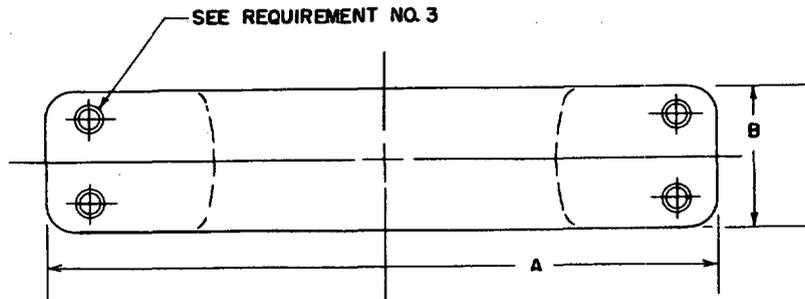

DIMENSIONS OF CHOCKS											
MS PART NO.	SIZE OF CLEAT	A	B	C	D	E	F	G	H	J	K
MS 16822-1	8	8	1 1/2	2 1/8	3 1/4	1 5/8	3/8	5/16	1 1/4	5/8	3/8
MS 16822-2	10	10	2 1/2	2 1/8	4 1/2	1 7/8	1/2	3/8	2 1/4	5/8	1/2
MS 16822-3	12	12	2 3/4	2 3/4	6 1/2	1 7/8	1/2	1/2	2 3/4	5/8	1/2

REQUIREMENTS

- Chock shall be of commercial bronze of tensile strength of not less than 30,000 p.s.i.
- The tolerances for length and width may be plus or minus 1/4 inch. All other dimension tolerances, plus unlimited, minus 1/32 inch.
- Holes 13/32 inch diameter countersunk to suit 3/8 inch diameter bolt for 10 inch and 12 inch chocks. Single hole only required on center line in each end of 8 inch chock to suit use of 7/16 inch minimum diameter countersunk head bolt.
- Used on weather deck of boats for positioning and control of boat handling lines.

APPROVED 26 SEP 1958 REVISED

CUSTODIANS	SHIPS	<b>MILITARY STANDARD</b>		<b>MS16822</b>
		CHOCKS, ROPE, CLOSED, MARINE HARDWARE		
PROCUREMENT SPECIFICATION None	SUPERSEDES:			SHEET 1 OF 1