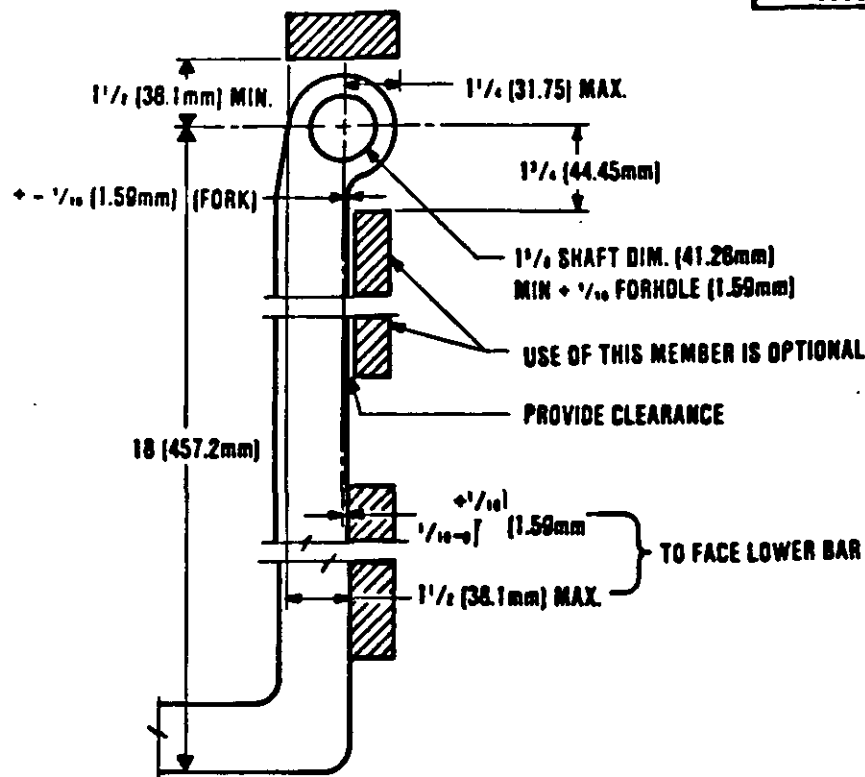


FED. SUP CLASS
3930

SIDE ELEVATION

DETERMINED BY MAXIMUM
DESIRED FORK SPREAD
FRONT ELEVATION

NOTES:

1. THE MANUFACTURERS SELECTED DESIGN SHALL PROVIDE FOR LATERAL RETENTION OF THE FORKS AT THE SPACINGS INDICATED ABOVE.
2. FORK WIDTH SHALL BE IN ACCORDANCE WITH SPECIFICATIONS
3. RETENTION SPACING (A) TO BE 1/2 INCHES (38.1mm)

PA NAVY - SA
OTHER CUST REVIEW:
GL/MO/B4/SH
USER: MO/MC

TITLE

SHAFT TYPE FORK MOUNTING FOR TRUCKS
OF 2000 (907.18 kg) AND 4000 (1814.36 kg)
POUND CAPACITY BASED ON 24" (609.6mm)
LOAD CENTER.

MILITARY STANDARD

MS 16958

PROCUREMENT SPECIFICATION
FDP FSC 3930 FORK LIFT TRUCK

SUPERSEDES:

REVISION OF 19 SEPT. 1961

SHEET 1 OF 1

APPROVED 19 Sep 1961 A REVISED 1 March 1965

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have furnished, for information or in any way supplied the said drawings, specifications, or other data is not to be regarded by implications or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 672-1
1 SEP 57