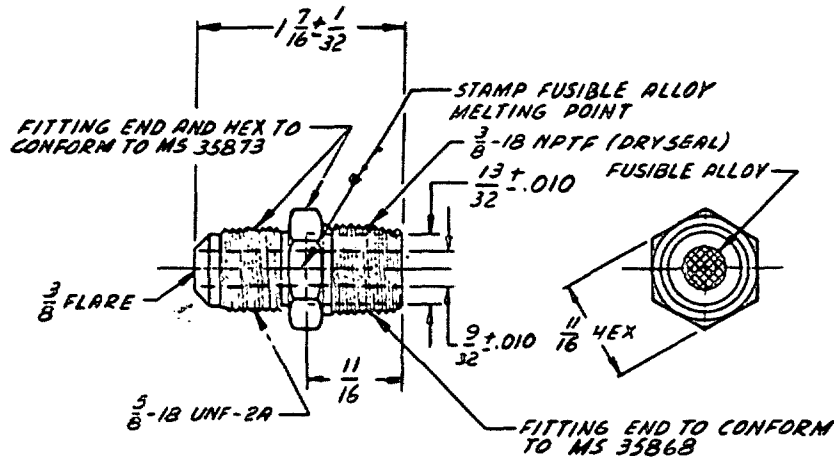


FED. SUP CLASS
5340

DASH NO.	FUSIBLE ALLOY MELTING POINT RANGE (°F)
-1	157 - 170
-2	208 - 220

NOTES

- (B) 1. MATERIAL FOR BODY, BRASS BAR STOCK CONFORMING TO ASTM B-16
2. ALL DIMENSIONS IN INCHES.
3. FOR USE WITH DICHLORODIFLUOROMETHANE (CCl₂F₂), R-12, REFRIGERANT.
4. TO CONFORM TO UNDERWRITERS' LABORATORIES, INC. STANDARD NO. 485.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID OR REQUEST FOR PROPOSAL.
7. MS PART NUMBER = MS NUMBER PLUS THE DASH NUMBER.
EXAMPLE: MS16993-1

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review User
Army - MI, IS MD

P.A. GL	TITLE	MILITARY STANDARD
Other Cust GL YD 99	PLUGS, FUSIBLE, REFRIGERANT-12	MS16993
Procurement Specification MIL-P-21769	SUPERSEDES:	SHEET / OF /

APPROVED 15 JAN 1962 REVISED (A) 31 JAN 1969 (B) 22 JUNE 1978