


FED SUP CLASS
5930

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatever; and the fact that the Government may have furnished technical data in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as an endorsement by the holder or any other person of equipment, or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

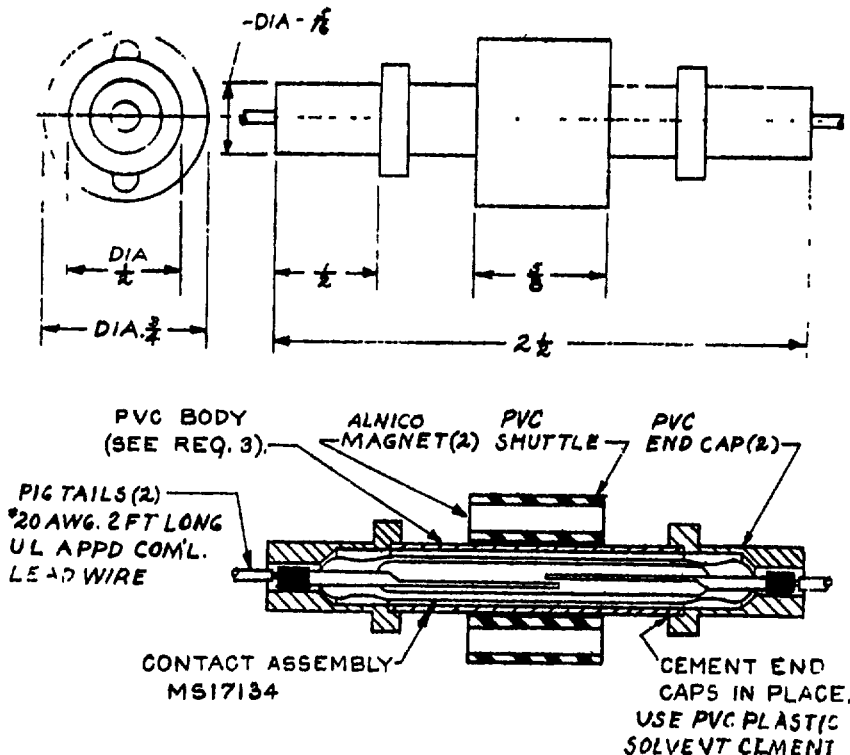

NOTES

1. Characteristics

Rating.

D.c. load. At 6-12-28 volts, 0.5 ampere resistive.

A.c. load. At 115-220 volts, 60 cycles; 10 watt lamp load

Poles. Single.

Action. On - Off.

Magnets. Permanent, Alnico 5, 6 or Sintered 2.

Material. Plastic, Poly-Vinyl Chloride (PVC).

Spec. Commercial

- (A) 2. Test Two switches of each 1000 switches or fraction thereof furnished on each Government order or purchased by shipbuilding contractors for installations on ships shall be tested for 50 operations under rated load and voltage and shall withstand this test without failure of any part thereof
3. Body of switch may be part of one end cap
4. Referenced documents shall be of the issue in effect on date of invitations for bid
5. For design feature purposes this standard takes precedence over procurement documents referenced herein

Dimensions are in inches
Tolerances unless specified
Decimal dimensions ± 0.005
Fractional dimensions $\pm 1/64$

MS part number MS17135-1		TITLE SWITCH, TILT, MAGNETIC		MILITARY STANDARD MS 17135 (SHIPS)	
P.A. Ships Other Cust					
PROCUREMENT SPECIFICATION MIL-L-2648		SUPERSEDES.		SHEET 1 OF 1	

DD FORM 672-1 N

SEP 57

LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Project 5930-N0288h)

APPROVED 26 Jan 1960 REVISED (A) 25 June 1960

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable