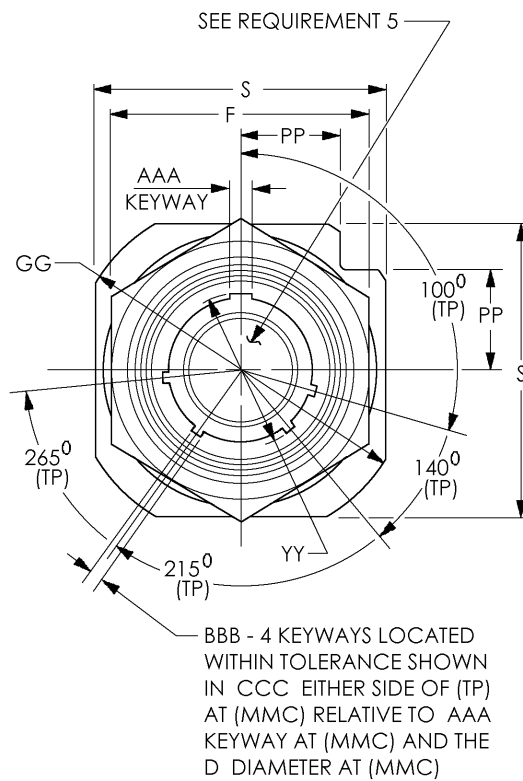


MS17347E

FIGURE 1. Configuration and dimensions – Continued.

MS17347E

Size	A Thread (plated) Class 2A	D dia + .005 - .010	F Hex + .017 - .016	H Panel Thickness	
				Min.	Max.
12	0.8750-0.1P-0.2L-DS	.567	1.250	.094	.188
14	1.0000-0.1P-0.2L-DS	.692	1.312	.094	.188
16	1.1250-0.1P-0.2L-DS	.817	1.500	.094	.188
18	1.2500-0.1P-0.2L-DS	.942	1.562	.094	.203
20	1.3750-0.1P-0.2L-DS	1.068	1.750	.094	.203
22	1.5000-0.1P-0.2L-DS	1.192	1.875	.094	.203
24	1.7500-0.1P-0.2L-DS	1.317	2.125	.094	.265
28	2.0000-0.1P-0.2L-DS	1.536	2.375	.094	.277
32	2.2500-0.1P-0.2L-DS	1.786	2.625	.094	.215
36	2.5000-0.1P-0.2L-DS	2.005	2.875	.094	.215
40	2.7500-0.1P-0.2L-DS	2.255	3.125	.094	.215
44	3.0000-0.1P-0.2L-DS	2.545	3.375	.094	.215

Size	M ± .010	N + .021 - .020	Q max	QQ max
12	1.141	.641	.737	---
14	1.141	.641	.737	1.287
16	1.141	.703	.675	1.225
18	1.156	.703	.660	1.210
20	1.156	.703	.660	1.210
22	1.156	.703	.660	1.210
24	1.219	.703	.597	1.147
28	1.231	.785	.503	1.053
32	1.231	.785	.503	1.053
36	1.231	.785	.503	1.053
40	1.231	.972	.503	1.053
44	1.231	.972	NA	NA

FIGURE 1. Configuration and dimensions – Continued.

MS17347E

SIZE	S	V Thread (Plated) class 2A-LH	W + .017 - .000	DD	EE dia + .001 - .007
12	1.375	.7500-20 UNEF	.188	.516	.672
14	1.500	.8750-20 UNEF	.188	.516	.797
16	1.750	1.0000-20 UNEF	.188	.516	.922
18	1.875	1.1250-18 NEF	.188	.516	1.040
20	2.000	1.2500-18 NEF	.188	.516	1.164
22	2.125	1.3750-18 NEF	.188	.516	1.289
24	2.375	1.6250-18 NEF	.188	.516	1.539
28	2.625	1.8750-16 UN	.250	.516	1.780
32	2.875	2.0625-16 N	.250	.516	1.967
36	3.125	2.3125-16 N	.250	.516	2.217
40	3.406	2.6250-16 UN	.250	.703	2.530
44	3.656	2.8750-16 UN	.250	.703	2.780

Size	RR Thread (Plated) class 2A-RH	Packing Preformed	DDD Socket Insert 1 ctn ± .030	EEE Pin Insert 1 ctn ± .030
12	1.000-20 UNEF	SAE-AS29513-24	.020	.729
14	1.1250-18 NEF	SAE-AS29513-26	.020	.729
16	1.2500-18 NEF	SAE-AS29513-127	.020	.729
18	1.3750-18 NEF	SAE-AS29513-129	.020	.729
20	1.5000-18 NEF	SAE-AS29513-131	.020	.729
22	1.6250-18 NEF	SAE-AS29513-133	.020	.729
24	1.8750-16 UN	SAE-AS29513-137	.020	.729
28	2.1250-16 UN	SAE-AS29513-141	.020	.729
32	2.3750-16 UN	SAE-AS29513-145	.020	.729
36	2.6250-16 UN	SAE-AS29513-149	.020	.729
40	2.8750-16 UN	SAE-AS29513-234	.020	.729
44	3.1250-16 UN	SAE-AS29513-136	.039	.764

FIGURE 1. Configuration and dimensions – Continued.

MS17347E

SIZE	GG dia	PP + .011 - .010	YY dia + .010 - .006	Z MAX (See req 4)	Z Min (size 0 only)
12	1.562	.486	.647	.523	Not applicable
14	1.750	.530	.772	.523	
16	2.000	.623	.897	.523	
18	2.125	.663	1.022	.508	
20	2.250	.707	1.148	.508	.582
22	2.500	.751	1.272	.508	
24	2.750	.840	1.473	.455	.519
28	3.000	.928	1.692	.433	.507
32	3.250	1.017	1.942	.433	
36	3.500	1.104	2.161	.433	
40	3.750	1.213	2.411	.433	
44	4.000	1.299	2.692	.656	

Size	RR Thread (Plated) class 2A-RH	AAA	BBB	CCC
12	1.000-20 UNEF	.226 + .007 / - .001	.063 + .007 / - .001	.0035
14	1.1250-18 NEF	.126 + .007 / - .001	.063 + .007 / - .001	.0035
16	1.2500-18 NEF	.182 + .010 / - .001	.108 + .010 / - .001	.007
18	1.3750-18 NEF	.182 + .010 / - .001	.108 + .010 / - .001	.007
20	1.5000-18 NEF	.182 + .010 / - .001	.108 + .010 / - .001	.007
22	1.6250-18 NEF	.182 + .010 / - .001	.108 + .010 / - .001	.007
24	1.8750-16 UN	.260 + .010 / - .001	.155 + .010 / - .001	.007
28	2.1250-16 UN	.260 + .010 / - .001	.155 + .010 / - .001	.007
32	2.3750-16 UN	.260 + .010 / - .001	.155 + .010 / - .001	.007
36	2.6250-16 UN	.260 + .010 / - .001	.155 + .010 / - .001	.007
40	2.8750-16 UN	.260 + .010 / - .001	.155 + .010 / - .001	.007
44	3.1250-16 UN	.260 + .010 / - .001	.155 + .010 / - .001	.007

FIGURE 1. Configuration and dimensions – Continued.

MS17347E

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.445	11.30	.772	19.61	1.250	31.75	2.217	56.31
.0035	0.089	.486	12.34	.785	19.94	1.272	32.31	2.500	57.150
.005	0.13	.503	12.78	.797	20.24	1.287	32.69	2.250	57.15
.006	0.15	.507	12.88	.817	20.75	1.289	32.74	2.255	57.25
.007	0.18	.508	12.90	.840	21.34	1.299	32.99	2.3125	58.737
.010	0.25	.516	13.11	.8750	22.225	1.312	33.32	2.3750	60.325
.011	0.28	.519	13.18	.897	22.78	1.317	33.45	2.375	60.33
.016	0.40	.523	13.28	.922	23.42	1.3750	34.925	2.411	61.24
.017	0.43	.530	13.46	.928	23.57	1.375	34.93	2.5000	63.500
.020	0.51	.567	14.40	.942	23.93	1.473	37.41	2.500	63.50
.021	0.53	.582	14.78	.972	24.68	1.5000	38.100	2.530	64.26
.025	0.64	.597	15.16	1.0000	25.400	1.500	38.10	2.545	64.64
.030	0.76	.609	15.47	1.000	25.40	1.536	39.01	2.6250	66.675
.031	0.79	.622	15.80	1.017	25.98	1.539	39.09	2.625	66.68
.039	0.99	.623	15.82	1.022	25.96	1.562	39.67	2.692	68.38
.045	1.14	.625	15.88	1.040	26.41	1.6250	41.275	2.7500	69.850
.062	1.57	.641	16.29	1.053	26.74	1.692	42.98	2.750	69.85
.063	1.60	.647	16.43	1.168	27.13	1.7500	44.450	2.780	70.61
.094	1.39	.656	16.66	1.104	28.04	1.750	44.45	2.8750	73.025
.108	2.74	.660	16.76	1.1250	28.575	1.780	45.21	2.875	73.03
.126	2.20	.663	16.84	1.141	28.98	1.786	45.36	3.0000	76.200
.141	3.58	.672	17.06	1.147	29.13	1.8750	47.625	3.000	76.20
.155	3.94	.675	17.15	1.148	29.16	1.875	47.63	3.1250	79.375
.182	4.62	.688	17.48	1.156	29.36	1.9420	49.33	3.125	79.38
.188	4.78	.692	17.58	1.164	29.57	1.967	49.96	3.250	82.55
.203	5.16	.703	17.86	1.192	30.28	2.0000	50.800	3.375	85.72
.215	5.46	.707	17.96	1.210	30.73	2.000	50.808	3.406	86.51
.250	6.35	.729	18.52	1.213	30.81	2.005	50.935	3.500	88.90
.260	6.60	.737	18.72	1.219	31.96	2.0625	52.388	3.656	92.86
.265	6.73	.7500	19.050	1.225	31.12	2.1250	53.975	3.750	95.25
.277	7.04	.751	19.08	1.231	31.37	2.125	53.98	4.000	101.60
.433	11.00	.764	19.41	1.2500	31.750	2.161	54.89		

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified tolerances are $\pm .016$ (0.41mm).
3. Metric equivalents are given for general information only.
4. In the event of a conflict between the text of this standard and the references cited herein, The text of this standard shall take precedence.
5. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
6. Maximum termination of grommet extension for sizes 12 and 16 contacts for class J.
7. Maximum termination of grommet extension for sizes 0, 4, and 8 contacts for class J.
8. For protective cover, see MS17349.

FIGURE 1. Configuration and dimensions – Continued.


MS17347E

REQUIREMENTS.

Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.

The part number shall include the class, size, finish, insert arrangement, style (P or S) and alternate position as shown in the example below.

Part or Identifying Number (PIN) example:

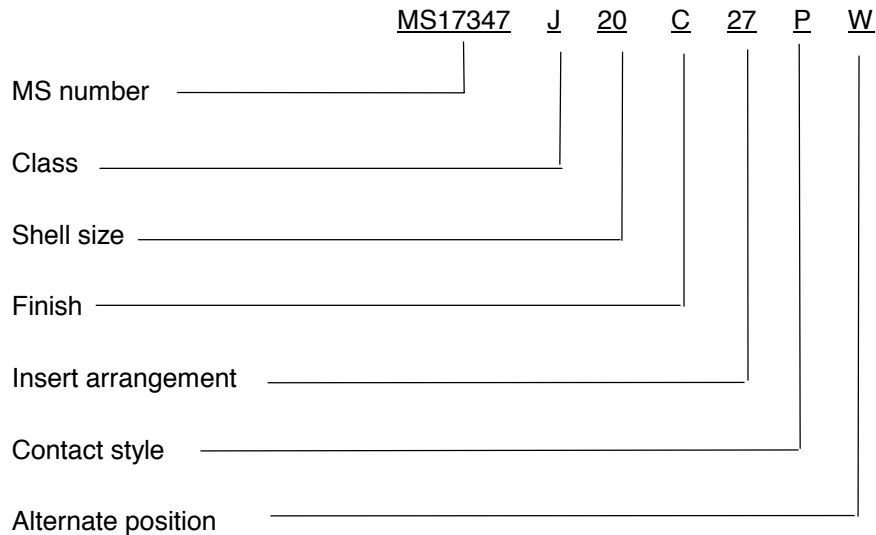

Mates with plugs shown on standard MS17344.

For size 0 contacts only, increase Z dimension by .312 (7.92mm) for shell

Sizes 12 through 40 and by .062 (1.57 mm) for shell size 44.

For size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell and nut finish shall be designated by the letter C (Conductive), or N (nonconductive).

CONCLUDING MATERIAL

Custodians:

Army – CR

Navy – EC

Air Force – 11

DLA – CC

Preparing activity:

DLA – CC

Review activities:

Army – AR, MI

Navy – AS, CG, MC, OS, YD

Air Force – 19

(Project 5935–4419–003)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL			
INSTRUCTIONS			
<p>1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.</p> <p>2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.</p> <p>3 The preparing activity must provide a reply within 30 days from receipt of the form.</p> <p>NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.</p>			
I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MS17347E	2. DOCUMENT DATE (YYYYMMDD) 2003/01/03	
3. DOCUMENT TITLE Connector, Receptacle, Electrical, Jamnut			
4. NATURE OF CHANGE <i>(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)</i>			
5. REASON FOR RECOMMENDATION			
6. SUBMITTER			
a. NAME <i>(Last, First, Middle Initial)</i>		b. ORGANIZATION	
c. ADDRESS <i>(Include zip code)</i>	d. TELEPHONE <i>(Include Area Code)</i> (1) Commercial (2) DSN <i>(if applicable)</i>		7. DATE SUBMITTED <i>(YYYYMMDD)</i>
8. PREPARING ACTIVITY			
a. NAME Defense Logistics Agency Defense Supply Center, Columbus		b. TELEPHONE <i>(Include Area Code)</i> (1) Commercial 614-692-0565 (2) DSN 850-0565	
c. ADDRESS <i>(Include Zip Code)</i> DSCC-VAI 3990 E. Broad St. Columbus, Ohio 43213		IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6621 Telephone (703) 767-6888 DSN 427-6888	