

INCH-POUND

MS17349D
 26 October 2005
 SUPERSEDING
 MS17349C
 12 August 1987

DETAIL SPECIFICATION SHEET

COVER, PROTECTIVE, ELECTRICAL CONNECTOR, RECEPTACLE

This specification is approved for use by all Departments
 and Agencies of the Department of Defense

The requirements for acquiring the product described herein
 shall consist of this specification sheet and MIL-DTL-22992.

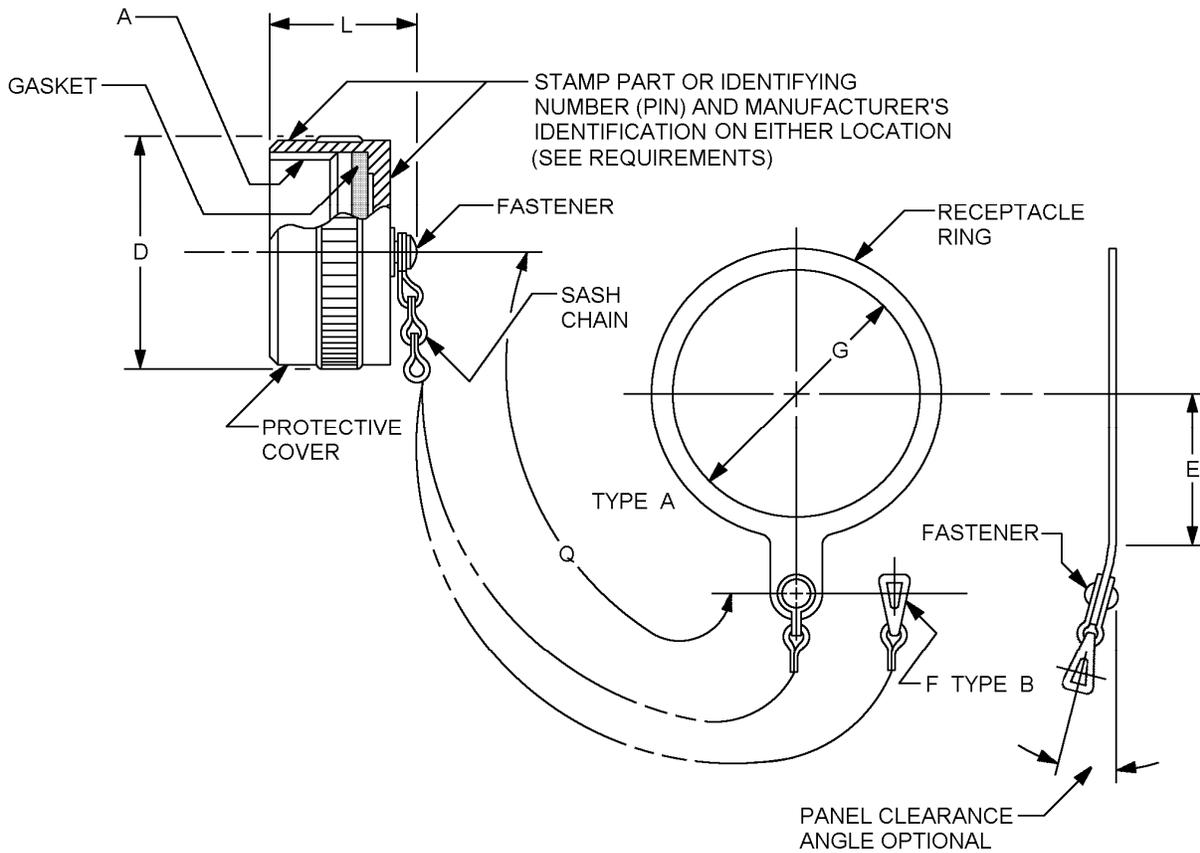


FIGURE 1. Dimensions and configuration.

MS17349D

Size	Type	A Thread class 2B	L Max.	Q	D Max	E Min	F (See Note 4)	G Min.		
12	A	0.8750-0.1P-0.2L-DS	.765	5.00	1.094	.83		1.016		
12	B						6			
14	A	1.0000-0.1P-0.2L-DS				1.141				
14	B				6					
16	A	1.1250-0.1P-0.2L-DS	.980			1.266				
16	B				6					
18	A	1.2500-0.1P-0.2L-DS				1.391				
18	B				8					
20	A	1.3750-0.1P-0.2L-DS				1.516				
20	B				8					
22	A	1.5000-0.1P-0.2L-DS			.980		1.641			
22	B					8				
24	A	1.7500-0.1P-0.2L-DS				1.891				
24	B			8						
28	A	2.0000-0.1P-0.2L-DS				2.141				
28	B			8						
32	A	2.2500-0.1P-0.2L-DS	.980			2.391				
32	B			10						
36	A	2.5000-0.1P-0.2L-DS				2.641				
36	B			10						
40	A	2.7500-0.1P-0.2L-DS				2.891				
40	B			10						
44	A	3.0000-0.1P-0.2L-DS		.980		3.141				
44	B				10					
						6.00				

FIGURE 1. Dimensions and configuration - Continued.

MS17349D

Inches	mm	Inches	mm	Inches	mm
.765	19.43	1.33	33.8	2.00	50.80
.83	21.1	1.344	34.14	2.05	52.07
.87	22.1	1.3750	34.925	2.141	54.38
.8750	22.225	1.391	35.33	2.219	56.36
.97	24.6	1.469	37.31	2.250	57.15
.980	24.89	1.48	37.6	2.391	60.73
1.000	25.40	1.500	38.10	2.469	62.71
1.01	25.7	1.516	38.51	2.500	63.50
1.016	25.81	1.562	39.67	2.641	67.08
1.094	27.79	1.62	41.1	2.719	69.06
1.12	28.4	1.641	41.68	2.750	69.85
1.1250	28.575	1.688	42.86	2.891	73.43
1.141	28.98	1.750	44.45	2.969	75.41
1.19	30.2	1.77	45.0	3.000	76.20
1.219	30.96	1.891	48.03	3.149	79.78
1.2500	31.75	1.91	48.5	3.219	81.76
1.266	32.16	1.938	49.22	5.00	127.0
				6.00	152.4

NOTES:

1. All dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are $\pm .016$ (0.41 mm).
4. F clearance to accommodate screw size indicated.

FIGURE 1. Dimensions and configuration - Continued.

MS17349D

REQUIREMENTS:

Design and construction, see figure 1.


Cover type shall be designated as A or B. Type A is used for MS17345, MS17347, and MS17348, and the type B is used for MS17343 and MS17346.

Chain shall be passivated stainless steel in accordance with type II, Class 3, trade number 8 of RR-C-271 and shall be within one link of length specified. Chain shall move freely on protective cap after assembly.

Cover finish shall be designated by the letter C (conductive) or N (nonconductive).

Cover shall be marked with the part number only when procured as a separate part.

PIN example:

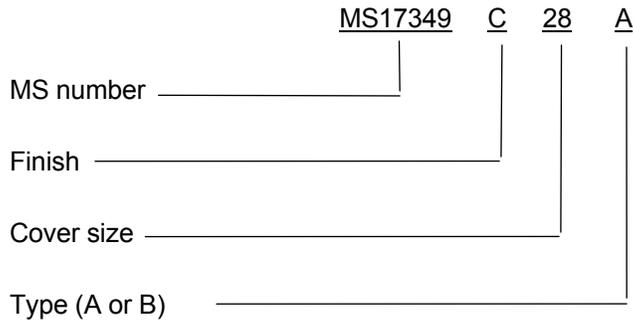

Qualification:

Visual and mechanical examination.

Humidity.

Durability.

Salt spray (corrosion).

Tensile.

Water immersion.

Group A sampling inspection. 100% inspection is not applicable, sampling inspection shall be in accordance with table I:

TABLE I. Group A sampling plan.

Lot size	Sampling size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3.200	42 units

MS17349D

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-22992. this document references the following:

MS17343
MS17345
MS17346
MS17347
MS17348
RR-C-271

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:

DLA – CC

Review activities:

Army – AR, CR4, MI
Navy – AS, CG, MC, OS
Air Force – 19

(Project 5935–4719–009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.