


SIDE

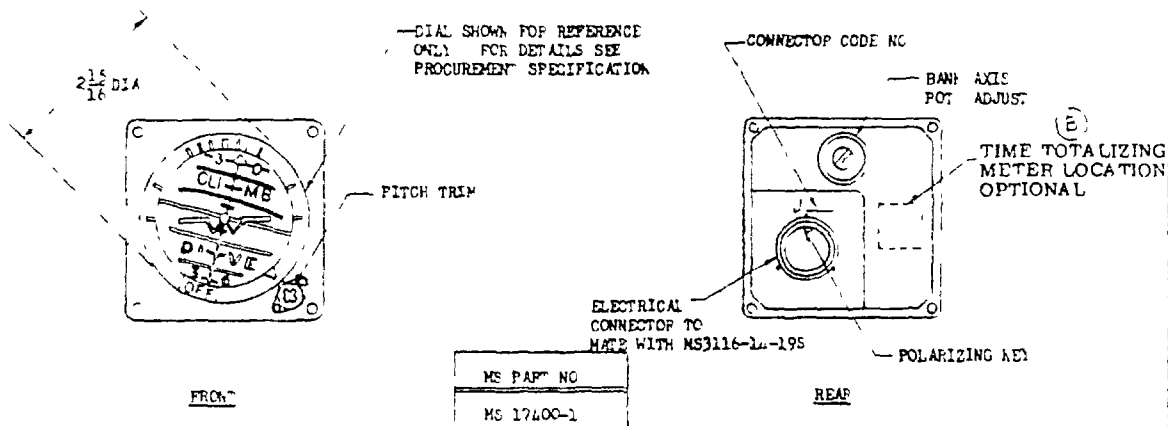

MS PAP' NO
MS 17400-1

CONNECTOR TABLE	
ELECTRICAL PINS	CONNECTIONS
A	11 ϕ 400 cps neutral
B	11 ϕ 400 cps single-phase power
C	
D	Stator lead* for roll synchro control device
E	
F	
G	Stator lead* for pitch synchro control device
H	
I	
J	Power failure warning (connect to pin A to complete circuit)
K	
L	Internal lighting power input 5 volts (ac or dc)
M	Pitch null test terminal (pitch error voltage between this pin and pin A)
N	Roll null test terminal (roll error voltage between this pin and pin A)
O-G-S	
U-1	No connections

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE. FRACTIONS $\pm \frac{1}{16}$ DECIMALS ± 0.005 . THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 JUNE 1962 REVISION A 15 NOV 1962 B 05 JULY 1964

PA Navy - Wep
Other Cust

TITLE

INDICATOR, ATTITUDE, REMOTE
3 INCH CASE

MILITARY STANDARD

MS17400 (WEP)