


FED. SUP CLASS  
4820

(B)

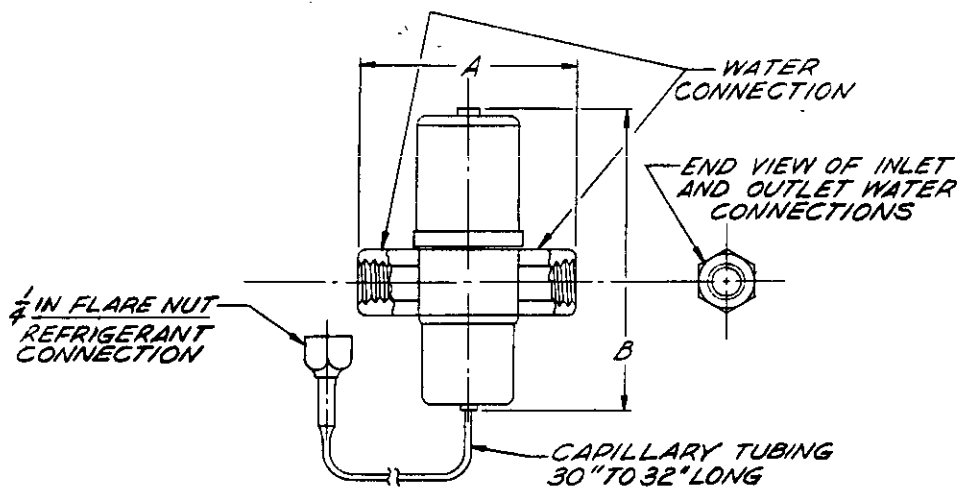

TOP OR BOTTOM POWER UNIT

DASH NO.	WATER INLET/OUTLET CONNECTIONS (INCHES) NPT	RATE OF WATER FLOW (GPM) MIN	MAX DIMENSIONS (INCHES)	
			A	B
-1	3/8	6	2 15/16	7 3/8
-2	1/2	9	3 1/2	8 5/16
-3	3/4	15	3 11/16	

Price Activity User Activities  
Army - C2  
Navy - C2, MS  
DSA - GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

1. FOR THE

**CANCELLED**  
4 FEBRUARY 1985, NO SUPER-  
**CANCELLED AFTER**  
**SEDING STANDARD**

A.G. (MIN).

+ 10 P.

REFRIGERANT SHALL BE SUITABLE FOR USE WITH REFRIGERANT-12  
CONTACT WITH WATER SHALL BE CORROSION-RESISTANT.

FLOW OR WATER TO BE PERMANENTLY MARKED ON VALVE BODY.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS  
OR REQUEST FOR PROPOSAL.

6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(B) 7. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.  
EXAMPLE: MS 17797-1.

(C) CANCELLED

P.A. ARMY - 6L Other Cust NAVY - YD USAF - 82	TITLE VALVES, REGULATING, FLUID PRESSURE, (WATER) REFRIGERANT -12	MILITARY STANDARD <b>MS 17797</b>
PROCUREMENT SPECIFICATION MIL-V-23181	SUPERSEDES:	SHEET / OF /

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(C) 4 FEBRUARY 1985

APPROVED 21 FEB 62 REVISED (A) 22 OCT '65 (B) 16