


AMSC N/A
INSTRUCTIONS: STATEMENT IS APPROVED FOR PUBLIC RELEASE, INFORMATION IS UNCLASSIFIED
 This material is classified as UNCLASSIFIED for use by all Departments &
 agencies of the Department of Defense. Information for all uses
 regarding cost design applications and for operations are dealt by

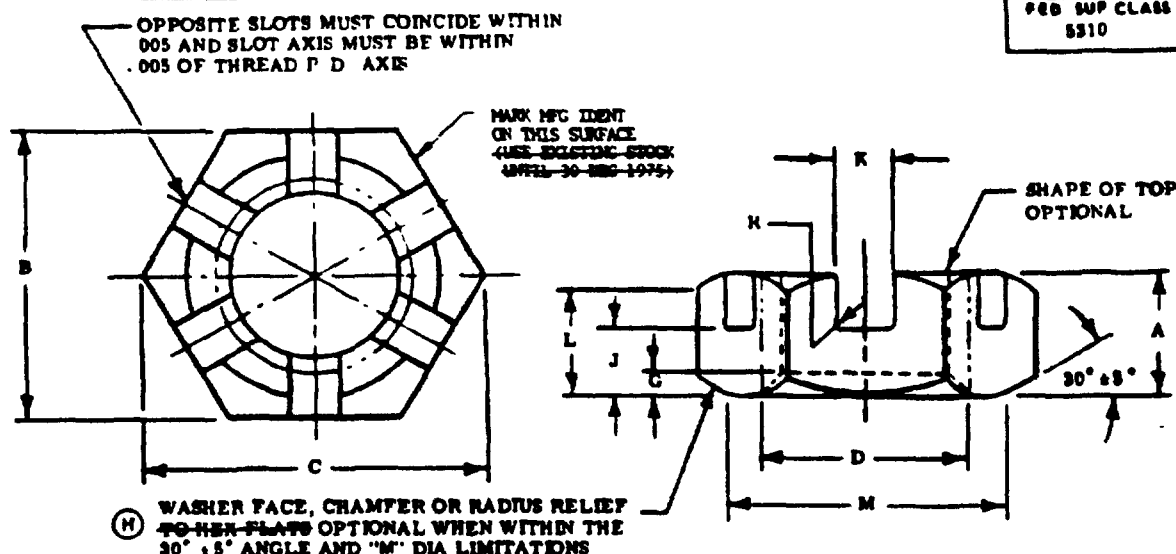

NOTES

- 1 MATERIAL STEEL UNS G11370 (AISI 1137) PER AMS 5024
UNS G11374 (AISI 11L37) PER AMS 5020
UNS K22033 (AISI 3135) PER AMS 6330
UNS G41300 (AISI 4130) PER AMS 6348
UNS G87400 (AISI 8740) PER AMS 6322, 6323, 6325, 6327, 6358
INSERT MATERIAL NYLON OR EQUIVALENT
- 2 PLATING CADMIUM PLATING IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2
- 3 BREAK SHARP EDGES AND REMOVE BURRS
- 4 SURFACE TEXTURE IN ACCORDANCE WITH ANSI B-46.1 SHALL NOT EXCEED 125 MICROINCHES
- 5 DIMENSIONS IN INCHES
- 6 DESIGN INFORMATION THESE NUTS MAY BE USED AT TEMPERATURES 250° F AND BELOW IN THOSE TYPES OF APPLICATIONS FOR WHICH SLOTTED OR CASTELLATED NUTS ARE APPROVED FOR USE. AND IF SUCH APPLICATIONS CONFLICT WITH ANY LIMITATION ON THE USE OF SELF-LOCKING NUTS, AS CITED BY MS33588, THIS STANDARD TAKES PRECEDENCE NUTS ARE TO BE INSTALLED IN ACCORDANCE WITH MS33588.
- 7 EXAMPLE OF PART NUMBER MS17826-4-.2500-28 NUT, CADMIUM PLATED.
NON-METALLIC INSERT
- 8 PERFORMANCE PER MIL-N-25027 EXCEPT FOR
1 - TABULATED ULTIMATE TENSILE STRENGTH VALUES
- (M) 2 - VIBRATION PER MIL-STD-1312-7 (30,000 CYCLES) USING ASSEMBLY TORQUES LISTED IN TABLE 1 FOR ONE SEATED CYCLE
3 - LOCKING TORQUE VALUES APPLICABLE FOR ONE CYCLE AT ROOM TEMPERATURE ONLY.
- (M) BIDS SHALL BE SOLICITED ONLY FROM THE MANUFACTURERS OR DISTRIBUTORS LISTED ON QPL-25027.
- 9 CERTAIN PROVISIONS (LIMITS ACROSS FLATS DIMENSION) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION ABC AIR STD 17/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL,
EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL CARRY THE DATE OF THE ISSUE ADOPTED

(H) DENOTES CHANCES

P A NAVY - AS Other Code USAF - 99 ARMY - AV	INTERNATIONAL INTEREST .	TITLE NUT SELF-LOCKING, CASTELLATED, HEXAGON 230 x. THIN NON-FERROUS METAL	MILITARY STANDARD	
			MS17826	
PERFORMANCE SPECIFICATION (SEE NOTE 1)		SUPERSEDES MS17826 (ASFC)	FILE 1	IN 2

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY-AS
ARMY-AR, MIFED SUP CLASS
5310

TABLE 1 NUT DIMENSIONS AND STRENGTHS

SIZE DASH NO.	THREAD MIL-S-8879	A		B		C	D	G		J	
		MAX	MIN	MAX	MIN	MIN	MAX	MAX	MIN	MAX	MIN
-3	.1900-32UNJF-3B	.203	.173	.376	.367	.410	.215	.032	.006	.114	.094
-4	.2500-28UNJF-3B			.439	.430	.482	.275	.036	.007		
-5	.3125-24UNJF-3B			.502	.492	.552	.338	.042	.008		
-6	.3750-24UNJF-3B	.234	.204	.564	.553	.622	.400			.130	.110
-7	.4375-20UNJF-3B			.690	.679	.766	.463				
-8	.5000-20UNJF-3B			.265	.235	.752	.741	.837	.525	.050	.010
-9	.5625-18UNJF-3B	.328	.298	.877	.865	.978	.587	.055	.012	.208	.188
-10	.6250-18UNJF-3B			.940	.928	1.051	.650				
-12	.7500-16UNJF-3B	.390	.360	1.064	1.052	1.191	.795	.063	.014	.271	.251
-14	.8750-14UNJF-3B	.453	.423	1.252	1.239	1.403	.900	.072	.016	.333	.313
-16	1.0000-12UNJF-3B	.515	.485	1.440	1.427	1.613	1.025	.083	.018	.396	.376
-18	1 1250-12UNJF-3B	.578	.548	1.627	1.614	1.826	1.150			.427	.407
-20	1.2500-12UNJF-3B	.640	.610	1.815	1 801	2.038	1 275			.489	.469

TABLE 1 (CONT'D)

SIZE DASH NO.	K		L	M		R	ULTIMATE TENSILE STRENGTH LB MIN	TEST WRENCHING TORQUE (INCHES LBS)	ASSEMBLY TORQUE VIBRATION (IN LBS)	WEIGHT LB/100
	MAX	MIN	MIN	MAX	MIN	MAX		MIN	MAX	MAX
-3	.108	.078	.110	.376	.355	.035	1,000	20	16	.340
-4			.125	.439	.418		1,800	45	15	400
-5				.502	.480		2,900	90	70	550
-6	.155	.125	.140	.564	.543	.053	4,100	125	100	750
-7			.130	.690	.675		5,000	225	180	850
-8			.150	.752	.737		5,600	300	240	1,600
-9			.200	.877	.862		7,800	400	320	3,000
-10			.185	.940	.925		10,000	600	480	4,000
-12			.220	1.064	1.049	.062	15,500	1,100	880	5,850
-14	.187	.157	.288	1.252	1.237		22,800	1,900	1,500	9,150
-16			.333	1.440	1.425		35,500	3,000	2,400	14,300
-18			.384	1.627	1.612		46,300	5,000	4,000	28,200
-20			.429	1.815	1,800		59,200	7,000	5,600	39,300

"Review/new information is correct as of the date of this document.
For future coordination of changes to this document, draft submission
should be based on the information in the current DDMSB."

ABSC N/A
DISTRIBUTION STATEMENT IS APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments &
Agencies of the Department of Defense. Substitution for all new
engineering and design applications and for repetitive use shall be
made from this document.

P.A. NAVY-AS Other Cust	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING CASTELLATED, HEXAGON-250 x 7/16 NON METALLIC INSERT	MILITARY STANDARD MS17826
USAF - 99 ARMY - AV	*	PROPOSED SPECIFICATION MIL-N-2407 (SEE PROCUREMENT NOTE)	SHEET 2 OF 2
DD FORM 1 MAR 72 672-1 (Continued)		PREVIOUS EDITIONS ARE OBSOLETE	

APPROVED 30 MAR 62 REVISED (H) FOR CHANGES SEE SHEET 1