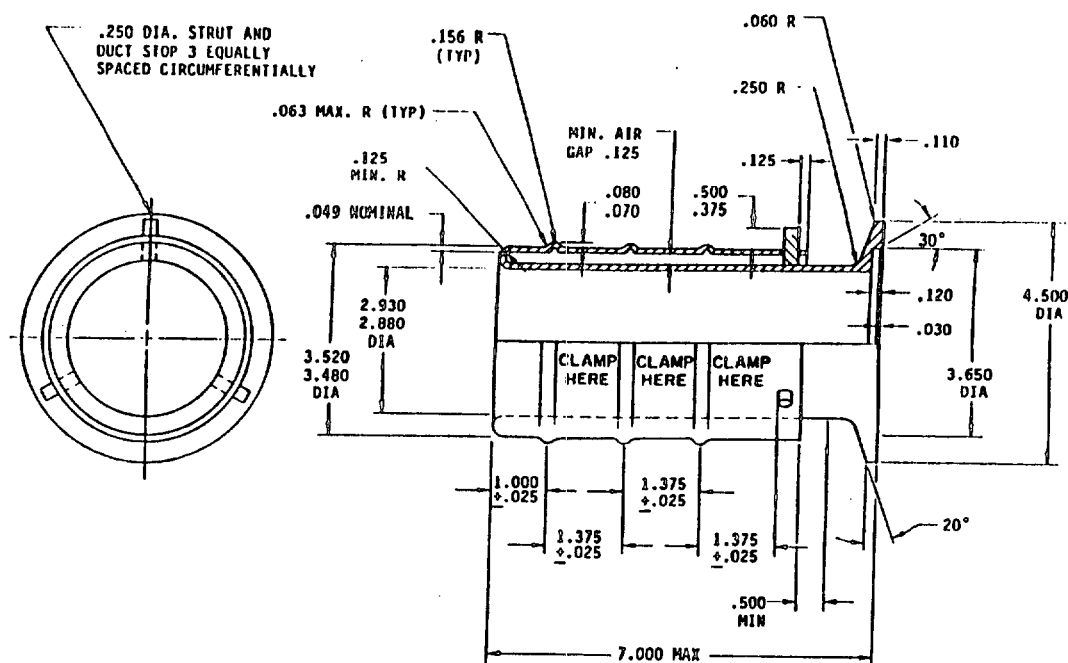


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DDGSS SPECIFIC IN THE SOLICITATION: MIL-C-25331

**REQUIREMENTS:**

1. MATERIAL: CORROSION RESISTANT STEEL (18-8), AISI TYPE 321, IN ACCORDANCE WITH SPECIFICATION MIL-S-6721. PASSIVATE PER QQ-P-35 AFTER MACHINING.
2. FINISH: ALL EXPOSED SURFACE ROUGHNESS SHALL BE 125 MICROINCHES Ra MAXIMUM PER ANSI/ASME B46.1.
3. POROSITY TEST: FINISHED CONNECTOR SHALL NOT LEAK WHEN SUBJECTED TO 100 PSI AIR PRESSURE AND SUBMERGED IN WATER FOR 3 MINUTES.

NOTES:

1. REMOVE BURRS AND BREAK SHARP EDGES TO .003 - .015 R.
2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .010$, ANGLES $\pm 0^{\circ}30'$.
3. UNLESS OTHERWISE SPECIFIED, ALL MACHINED FILLETS TO BE .020 RAD.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
5. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
6. REVISION LETTERS ARE NOT USED TO DENOTE CHANGES DUE TO THE EXTENSIVENESS OF THE CHANGES.

PREPARING ACTIVITY: NAVY — AS CUSTODIANS: ARMY — AV NAVY — AS AIR FORCE — 99 DLA — REVIEW: AIR FORCE-82, DLA-CS USER: ARMY - AV PROJECT NUMBER: 4730-1183	MILITARY SPECIFICATION SHEET		SPECIFICATION SHEET NUMBER MSI7835		20 JUN 91 REV E
	TITLE CONNECTOR, PNEUMATIC STARTER, DUCT-FLANGED, FEMALE		SUPERSEDING MSI7835D 4 APR 83		
			AMSC — N/A		FSC 4730
DISTRIBUTION STATEMENT <u>A</u> . APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.					
					PAGE 1 OF 1