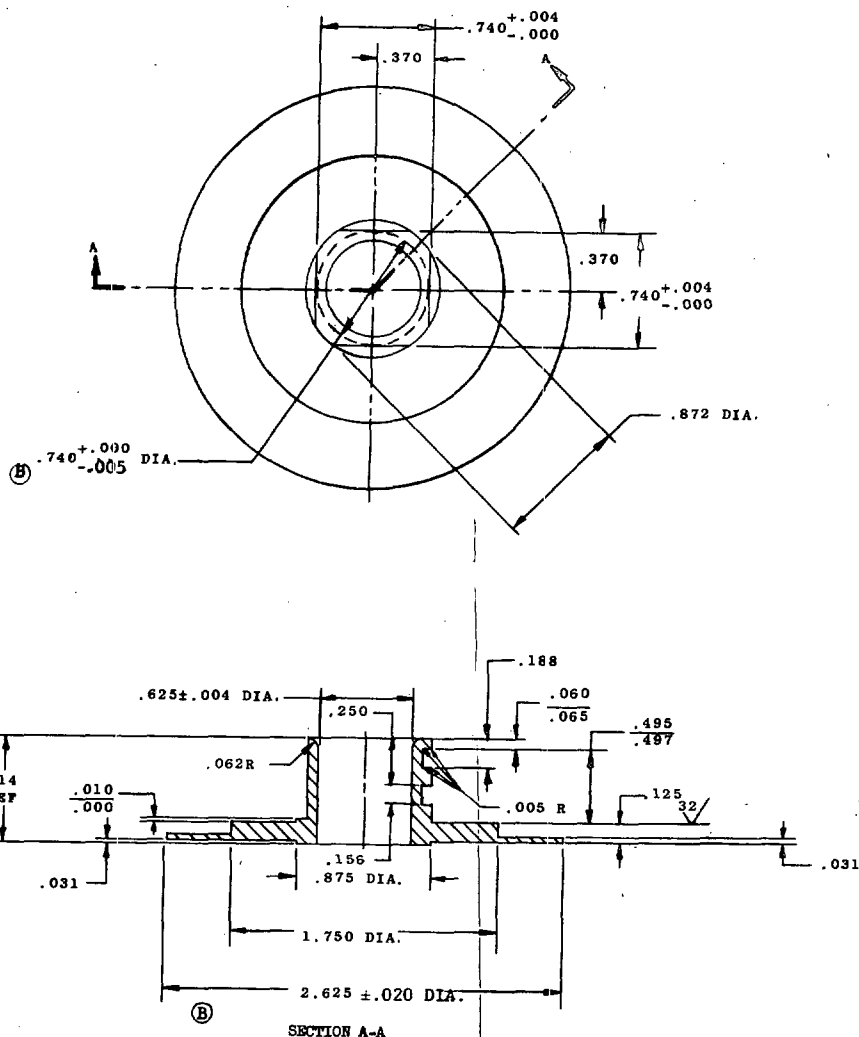


FED. SUP CLASS
8475

SECTION A-A

DASH NO.

-1

NOTES

1. MATERIAL: ALUMINUM ALLOY 2024 IN ACCORDANCE WITH QQ-A-225/G, TEMPER. T4.
2. FINISH: ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE II, DYED GREEN.
3. 125/32 ALL OVER EXCEPT AS NOTED. SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH ASA B46.1(1962)
4. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-8.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .005.
6. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
7. USAGE: INTENDED FOR USE ON MK2A ANTI-G SUIT TO PROVIDE MEANS OF SECURING ANTI-G AND VENTILATION NOZZLE ASSEMBLY (MS17968) TO THE ANTI-G SUIT AND ALLOWING FREE PASSAGE OF AIR.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) REVISED

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust	ANTI-G AIR INLET PORT	MS17971 (AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 14938

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-518/5157

APPROVED 2 DECEMBER 63 REVISED 27 APR 1965 (B) 21 Feb. 1967

This standard has been approved by the Naval Air Systems Command
Department of the NAVY and is mandatory for use by
that activity. All other military activities are required
to employ this standard where suitable.