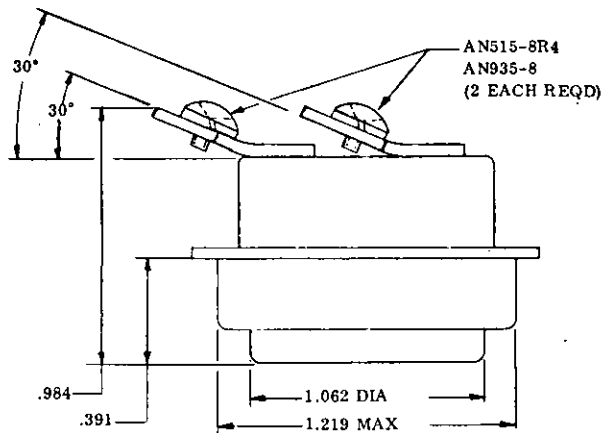
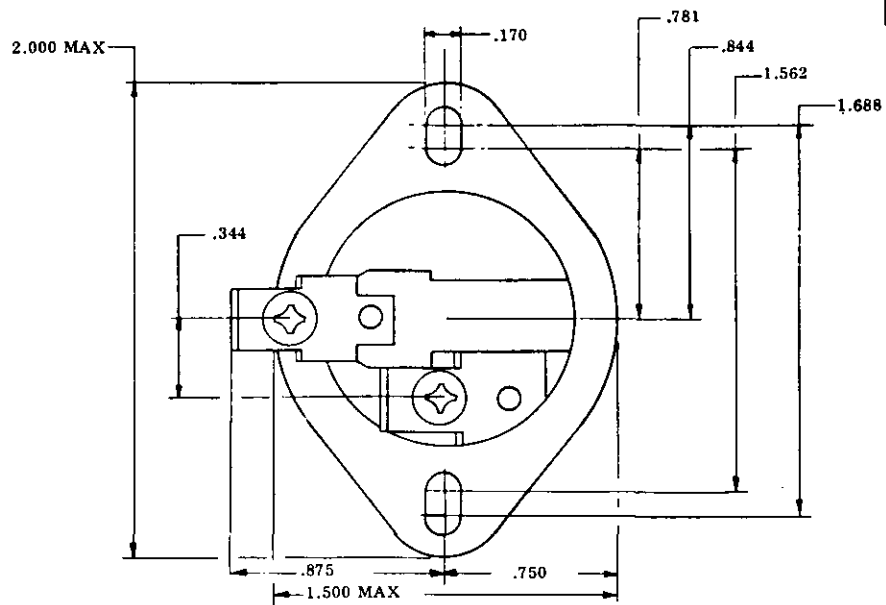


FED. SUP CLASS
5930

DASH NO.	TEMPERATURE		TOLERANCE
	OPEN	CLOSE	
-1	77°C	66°C	2.8°C
-2	24°C	13°C	3.3°C

NOTES:

1. LIFE: 100,000 CYCLES (MIN).
2. MAXIMUM TEMPERATURE 177°C.
3. CALIBRATION OF TEMPERATURE, $\pm 6.7^\circ\text{C}$ MINIMUM MEAN TEMPERATURE DIFFERENCE.
4. RESISTIVE HEATER LOAD 3000 WATTS, 120 VAC; 6000 WATTS 240 VAC.
5. CASE AND COMPONENT PARTS TO BE CORROSION RESISTANT OR SUITABLY PLATED TO RESIST CORROSION.
6. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS $\pm .016$, ANGLES $\pm 5^\circ$.

(B) CANCELED AFTER 28 FEBRUARY 1986 NO SUPERSEDING STANDARD
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE ON EFFECT ON DATE OF INVITATIONS FOR BID.
(R) DENOTES CHANGES

P.A. Navy-Weps Other Cust	TITLE SWITCH, THERMOSTATIC, SINGLE POLE, SINGLE THROW, ELECTRICAL	MILITARY STANDARD MS18110(Weps)
PROCUREMENT SPECIFICATION None	SUPERSEDES: BuOrd Dwg. No. 2153627	SHEET 1 OF 1