

INCH-POUND

MS18150K

17 October 2005

SUPERSEDING

MS18150J


21 February 1994

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, 2 CIRCUIT, SEALED TOGGLE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-83731.

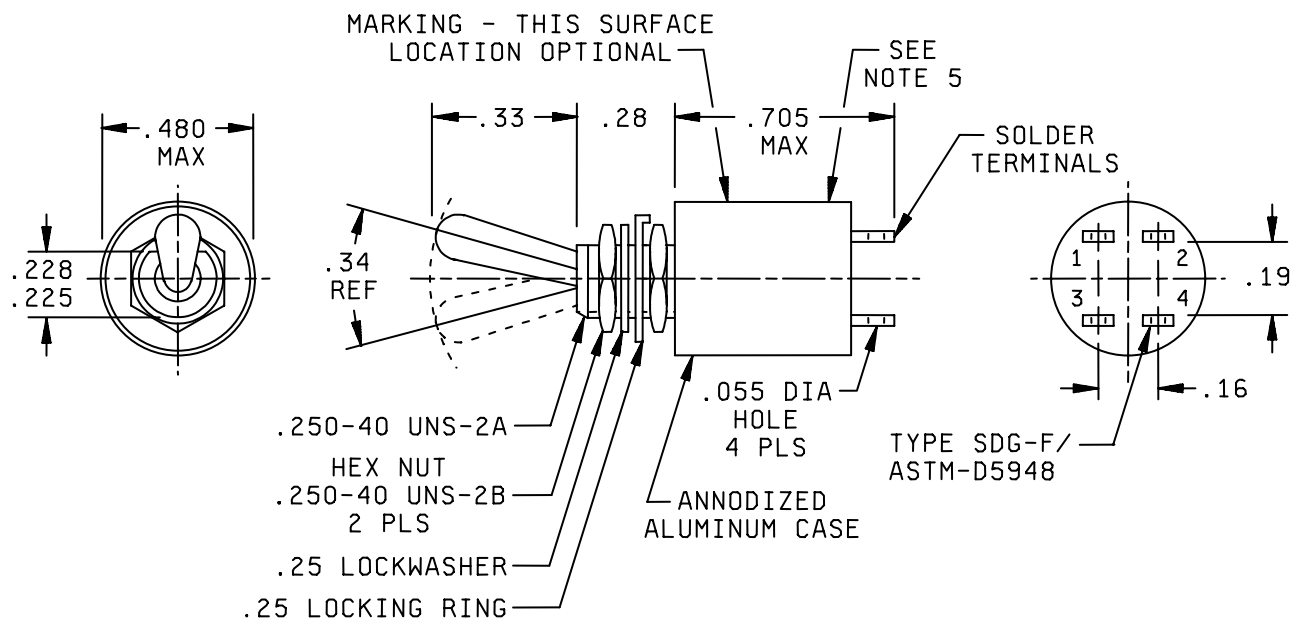

MS18150K

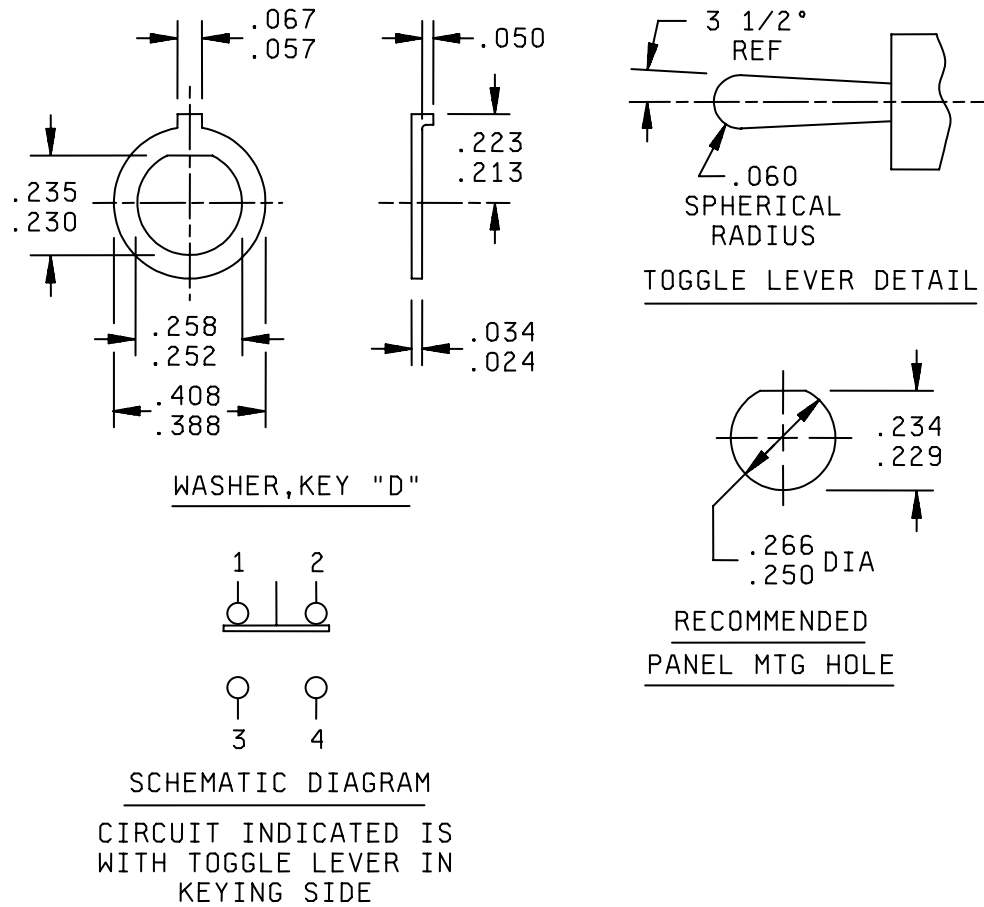


FIGURE 1. Dimensions and configuration - Continued.

MS18150K

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.024	0.61	.067	1.70	.225	5.72	.235	5.97	.266	6.76	.408	10.36
.034	0.86	.16	4.1	.228	5.79	.250	6.35	.28	7.1	.480	12.19
.055	1.40	.19	4.8	.229	5.82	.252	6.40	.33	8.4	.688	17.48
.057	1.45	.213	5.41	.230	5.84	.258	6.55	.388	9.86	.705	17.91
.060	1.52	.223	5.66	.234	5.94						

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are $\pm .005$ (0.13 mm) for three place decimals and $\pm .02$ (0.5 mm) for two place decimals.
4. For hardware detail specifications, see appendix of MIL-DTL-83731.
5. Contour of switch optional provided maximum dimensions specified are not exceeded.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. For design feature purposes, this military specification takes precedence over acquisition documents referenced herein.

FIGURE 1. Dimensions and configuration - Continued.

MS18150K

REQUIREMENTS:

All switches on this military specification are designed so that the movement of the switch mechanism is the same as that of the toggle lever.

Switching action: Keying side - On, Center - None, Opposite side - On.

TABLE I. Electrical ratings.

	28 V dc	120 V dc	115 V ac 60 and 400 Hz
RES	3 A	0.1 A	2 A
IND	1 A	0.1 A	1 A
LAMP	0.5 A	0.1 A	0.5 A

Strength of actuating lever pivot and lever stop: 12 pounds.

Dielectric withstanding voltage:

Initial: 1,000 V (Sea level), 400 V (altitude).

After endurance tests: 600 V.

Shock: Method II.

Operating temperature range: -40°C to +71°C.

Short circuit: Method II.

Weight: 0.012 pound maximum.

Military PIN: MS18150-1.

MS18150K

Referenced Documents:

MIL-DTL-83731
ASTM-D5948

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR
Air Force - 11
Navy – EC
DLA - CC

Preparing activity:
DLA – CC

(Project 5930-1915)

Review activities:

Army - AV
Navy – AS
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil/> .