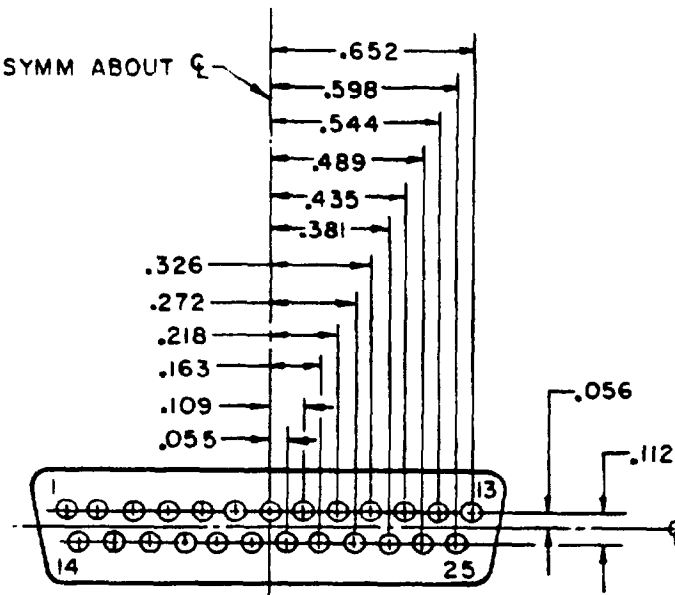
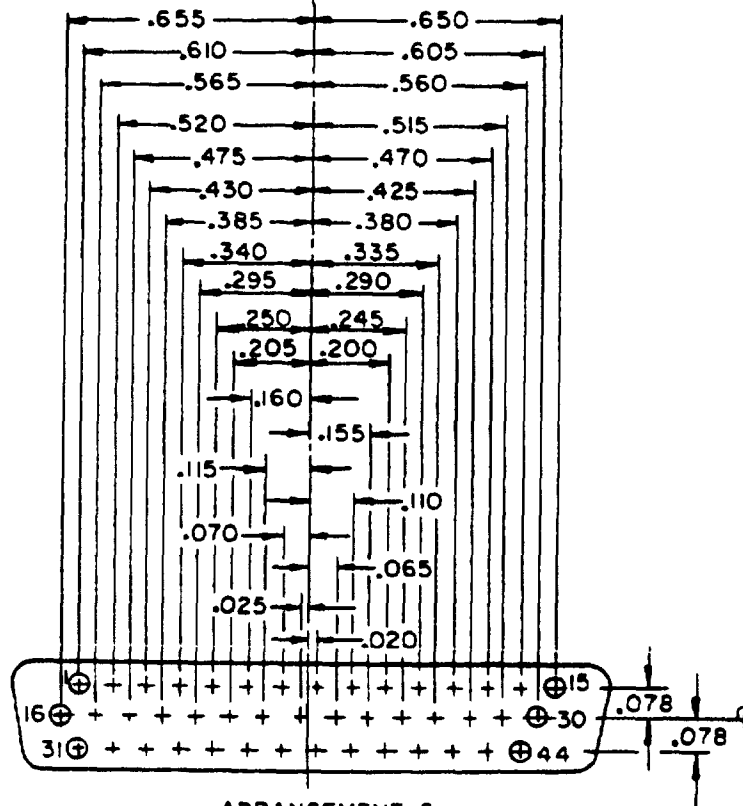


FED SUP CLASS  
5935SYMM ABOUT  $\epsilon$ 

ARRANGEMENT 1

 $\epsilon$  INSERT

ARRANGEMENT 2

(F) "ENTIRE STANDARD REVISED"

P A NAVY-EC  Other Cust AF-85 ARMY-CR	International interest	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR SHELL SIZE 3	MILITARY STANDARD
Procurement Specification MIL-C-24308	SUPERSEDES	MS18275	
DD FORM 672 MAY 71	(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE	5935-3611-05	

AMSC N/A

DISTRIBUTION STATEMENT A

Approved for public release, distribution is unlimited

 User activities  
 Army - ME, AT  
 Navy - MC, CG  
 Air Force

 Review activities  
 Army - MI  
 Navy - AS, SH  
 Air Force - 11  
 DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

 APPROVED 30 NOV 67  
 REVISED (F) 26 JAN 89

FED SUP CLASS  
5935User activities  
Arm. ME, AT  
Navy MC, CG  
Air ForceReview activities  
Army - MJ  
Navy - AS, SH  
Air Force - TI  
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

MS number	Arrangement number	Contacts			
		No. 22D	No. 20	No 16 shielded	No 8 shielded
MS18275-1	1	0	25	0	0
MS18275-2	2	44	0	0	0

Inches	mm	Inches	mm	Inches	mm	Inches	mm
020	0 51	155	3 94	326	8 28	489	12 42
025	0 64	160	4 06	335	8 51	515	13 08
055	1 40	163	4 14	340	8 64	520	13 21
056	1 42	200	5 08	380	9 65	544	13 82
065	1 65	205	5 21	381	9 68	560	14 22
070	1 78	218	5 54	385	9 78	565	14 35
078	1 98	245	6 22	425	10 80	598	15 19
109	2 77	250	6 35	430	10 92	605	15 37
110	2 79	272	6 91	435	11 05	610	15 49
112	2 84	290	7 37	470	11 94	650	16 51
115	2 92	295	7 49	475	12 06	652	16 56
						655	16 64

## NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All dimensions are TP (true position).
4. Contact holes in insert shall be located on TP within a .005 (0.13 mm) diameter circle. Maximum material condition applies.
5. Markings are shown for the pin insert front. Socket inserts are the opposite.
6. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

P A NAVY-EC  Other Cust AF-85 ARMY-CR	International Interpretation	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR SHELL SIZE 3	MILITARY STANDARD
			MS18275
Procurement Specification MIL-C-24308		SUPERSEDES	PAGE 2 OF 2

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE  
1 MAY 73

APPROVED 30 NOV 67 REVISED (F) ENTIRE STANDARD REVISED