INCH-POUND

MS20663F <u>5 November 2001</u> SUPERSEDING MS20663E 10 January 2001

DETAIL SPECIFICATION SHEET

BALL END, WIRE ROPE, SWAGING, DOUBLE SHANK

- * This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.
- * The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-781 and QPL-781 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

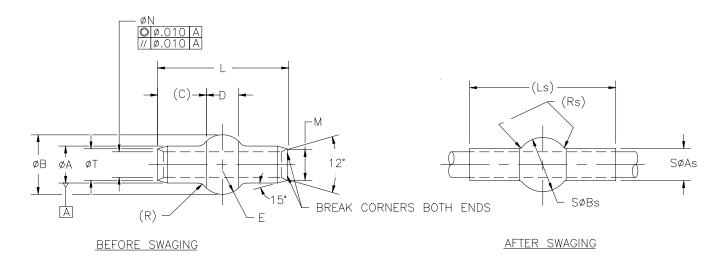


FIGURE 1. Ball end, wire rope, swaging, double shank.

AMSC N/A 1 of 4 FSC 1560

MS20663F

TABLE I. Dash numbers and dimensions.

Dash number		rope	Minimum breaking	breaking		ØAs		ØB		SØBs spherical		C reference
	Nominal	Minimum	strength lbs.									
-2	1/16	.062	480	.127		.112	+.000	.207		.190	+.000	.125
-3	3/32	.093	920	.163	+.000	.143	003	.277	+.000	.253	003	.188
-4	1/8	.125	2,000	.218	004	.190	003	.345	004	.315	003	.250
-5	5/32	.156	2,800	.254	004	.222	+.000	.419	004	.379	+.000	.313
							004				004	
-6	3/16	.187	4,200	.293		.255	+.000	.487		.442	+.000	.375
-7	7/32	.218	5,600	.347	+.000	.302	005	.555	+.000 005	.505	005	.438
-8	1/4	.250	7,000	.401		.348		.624		.567		.500
-9	9/32	.281	8,000	.439	003	.382	+.000	.694	003	.632	+.000	.562
-10	5/16	.312	9,800	.475		.413	007	.763		.694	007	.625

TABLE I. <u>Dash numbers and dimensions</u> - Continued.

Dash number	D		Е	L	Ls	M	ØN		R	Rs	ØT
	reference		radius	±.0075	reference	+.010			radius	radius	+.000
			reference			000			reference	reference	010
-2	.114	+.000	.0825	.3620	.390	.079	.073		.028	.014	.109
		003									
-3	.152	+.000	.110	.5250	.578	.114	.104	+.004	.037	.019	.141
		004						004			
-4	.1895		.137	.6880	.765	.152	.139	000	.046	.023	.188
-5	.2270		.165	.8500	.953	.185	.169		.056	.028	.219
-6	.2640	+.000	.192	1.0120	1.140	.221	.201		.065	.033	.250
-7	.3025	005	.220	1.1750	1.328	1/	.233	+.005	.075	.038	.297
-8	.3395		.247	1.3370	1.515		.264		.084	.042	.344
-9	.3775		.275	1.4970	1.719	<u>1</u> /	.297	000	.094	.046	.375
-10	.4145		.302	1.6640	1.875		.328		.103	.046	.406

 $[\]underline{1}$ / No tapered bellmouth on -7, -8, -9, -10.

REQUIREMENTS:

- 1. Material: Material shall be in accordance with MIL-DTL-781.
- 2. Finish: Finish shall be in accordance with MIL-DTL-781.
- 3. Swage: Swage shall be in accordance with MIL-DTL-6117.
- 4. Tolerances: Unless otherwise specified, tolerances: decimals \pm .010, angles \pm 3°.

NOTES:

1. The part or identifying number (PIN) shall consist of the letters MS, the specification sheet number, the letter "C" for corrosion resistant steel (CRES), and a dash number taken from table I.

^{2/} Reference dimensions are for design purposes only and are not an inspection requirement.

MS20663F

EXAMPLE: MS 20663 C 2

Dash number

Use "C" for CRES

Specification sheet number

MS prefix

- 2. Dimensions are in inches.
- 3. Interpret drawing in accordance with ASME Y14.5M.
- 4. Remove burrs and sharp edges. (See MIL-DTL-781.)
- 5. Interchangeability relationship: MS20663 and AN663 parts identified by the same dash number are universally, functionally and dimensionally interchangeable.
- 6. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.
- 7. Unless otherwise specified, issues of reference documents are those in effect at the time of solicitation.
 - 8. MS20663 supersedes AN663.
- 9. Corrosion resistant steel parts can be universally substituted for carbon and alloy steel parts in accordance with table II. Carbon and alloy steel parts cannot be substituted for corrosion resistant steel parts.

TABLE II. Substitution table.

MS PART NUMBER						
Corrosion	Carbon steel,					
resistant steel	cadmium plated					
MS20663C2	MS20663-2					
MS20663C3	MS20663-3					
MS20663C4	MS20663-4					
MS20663C5	MS20663-5					
MS20663C6	MS20663-6					
MS20663C7	MS20663-7					
MS20663C8	MS20663-8					
MS20663C9	MS20663-9					
MS20663C10	MS20663-10					

10. Carbon and alloy steel parts are inactive for new design.

MS20663F

CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - CR4

Navy - AS

Air Force - 99

Reviewers:

Army - AR, MD

Navy - MC

Air Force - 71

Preparing activity: DLA - GS5

(Project 1560-0013)