

INCH-POUND

MS20664C
 15 August 1997
 Superseding
 MS20664B
 20 June 1987

MILITARY SPECIFICATION SHEET

BALL END, WIRE ROPE, SWAGING, SINGLE SHANK

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-DTL-781.

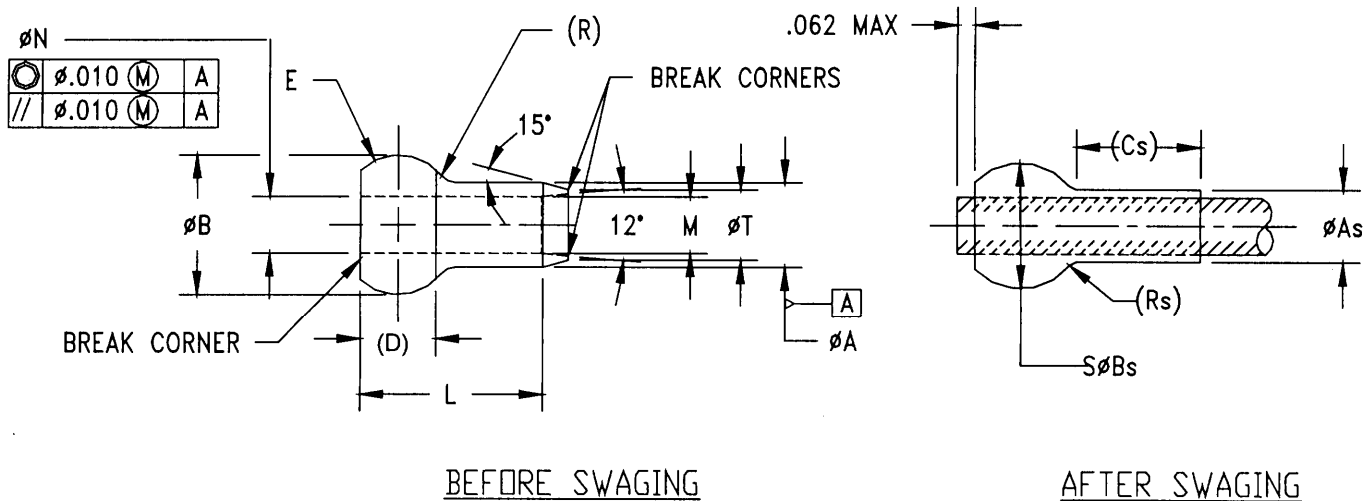


FIGURE 1. Ball end, wire rope, swaging, single shank.

(C) Entire document revised

AMSC N/A

FSC 4030

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MS20664C

TABLE I. Dimensions and dash numbers.

MS PART NO. CORROSION RES. STEEL	NOM CABLE DIA	MINIMUM BREAKING STRENGTH	ØA		ØA _s		ØB		SØBs SPHERICAL		Cs REF
MS20664C2	.062 (1/16)	480	.132		.112	+ .000	.212		.190	+ .000	.156
MS20664C3	.093 (3/32)	920	.168	+ .000	.143	- .003	.282	+ .000	.253	- .003	.234
MS20664C4	.125 (1/8)	2000	.223	- .004	.190		.350	- .004	.315		.313
MS20664C5	.156(5/32)	2800	.259		.222	+ .000 - .004	.424		.379	+ .000 - .004	.391
MS20664C6	.187 (3/16)	4200	.298		.255		.492		.442		.469
MS20664C7	.218(7/32)	5600	.352	+ .000	.302	+ .000	.560		.505	+ .000	.547
MS20664C8	.250 (1/4)	7000	.406	- .005	.348	- .005	.629	+ .000	.567	- .005	.625
MS20664C9	.281(9/32)	8000	.444		.382	+ .000	.699	- .005	.632	+ .000	.750
MS20664C10	.312 (5/16)	9800	.480		.413	- .007	.768		.694	- .007	.813

TABLE I. Dimensions and dash numbers - Continued.

MS PART NO. CORROSION RES. STEEL	D REF		E RAD REF	L ± .005	(a) M + .010 - .000	ØN		R RAD REF	R _s RAD REF	ØT + .000 - .010
MS20664C2	.114	+ .000 - .003	.0825	.2685	.079	.073		.028	.014	.109
MS20664C3	.152	+ .000 - .004	.110	.384	.114	.104	+ .004 - .000	.037	.019	.141
MS20664C4	.1895	+ .0000 - .0050	.137	.500	.152	.139	+ .005 - .000	.046	.023	.188
MS20664C5	.2275		.165	.616	.185	.169		.056	.028	.219
MS20664C6	.2645		.192	.730	.221	.201		.065	.033	.250
MS20664C7	.3025		.220	.846	(a)	.233		.075	.038	.297
MS20664C8	.3395		.247	.962	(a)	.264		.084	.042	.344
MS20664C9	.3775		.275	1.078	(a)	.297		.094	.046	.375
MS20664C10	.4145		.302	1.193	(a)	.328		.103	.046	.406

(a) NO TAPERED BELLMOUTH ON -7, -8, -9, -10.

REQUIREMENTS:

1. Material: Steel, corrosion resistant, steel 303Se, (UNS S30323) or 304 (UNS S30400).
2. Finish: In accordance with MIL-DTL-781.
3. Swage: In accordance with specification MIL-DTL-6117.
4. Tolerance: Unless otherwise specified, tolerances: decimals ± .010, angles ± 3°.

MS20664C

NOTES:

1. Dimension in inches.
2. Remove all burrs and sharp edges
3. Interpret drawing in accordance with ASME Y14.5M.
4. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence.
5. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.
6. MS20664 and AN664 parts identified by the same dash numbers are universally, functionally, and dimensionally interchangeable.
7. Corrosion resistant steel parts shall be used for new design and can be universally substituted for carbon and alloy steel parts as shown in the substitution table. Carbon and alloy steel parts cannot be substituted for corrosion resistant steel parts.

SUBSTITUTION TABLE

MS PART NO.	
CARBON STEEL CAD PLATE	CORROSION RESISTANT STEEL
MS20664-2	MS20664C2
MS20664-3	MS20664C3
MS20664-4	MS20664C4
MS20664-5	MS20664C5
MS20664-6	MS20664C6
MS20664-7	MS20664C7
MS20664-8	MS20664C8
MS20664-9	MS20664C9
MS20664-10	MS20664C10

MILITARY INTEREST

Custodians:

Army - ME
Navy - AS
Air Force - 99

Preparing activity:
DLA - IS

(Project 4030-0283)

Review activity:

Army - MI