

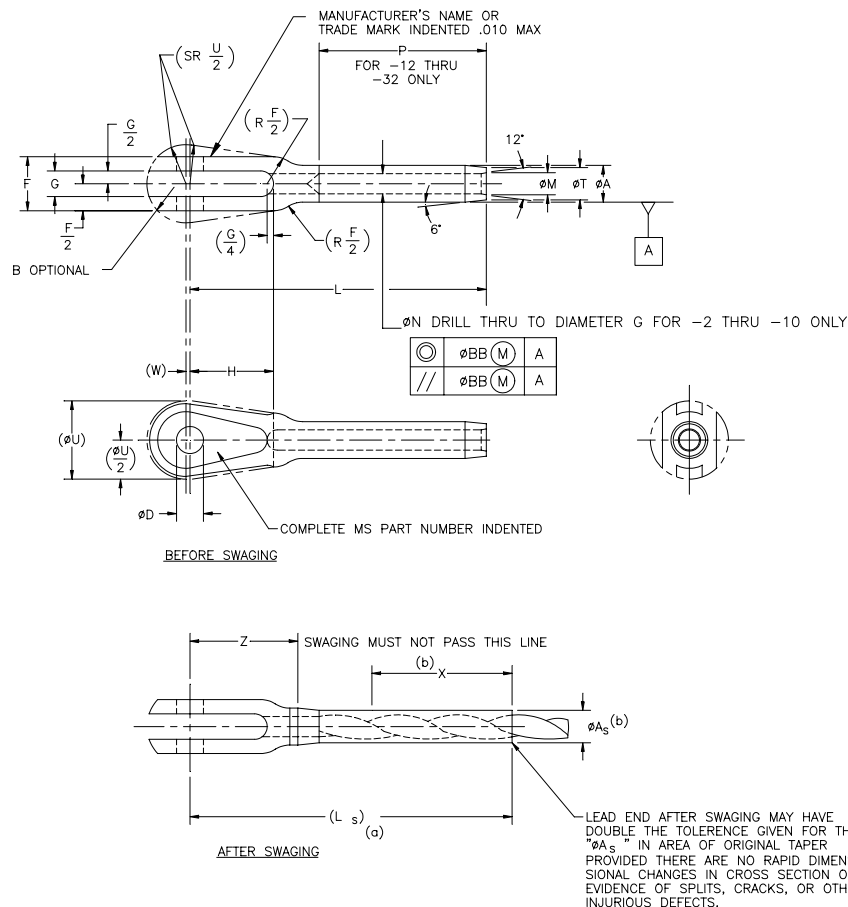
**INCH-POUND**

MS20667J  
 20 November 2002  
 SUPERSEDING  
 MS20667H  
 5 November 2001

**DETAIL SPECIFICATION SHEET****TERMINAL, WIRE ROPE, SWAGING, FORK END**

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-781 and QPL-781 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

**NOTES:**

- (a) Reference dimensions are for design purposes only and are not an inspection requirement.
- (b) Swaged terminals shall conform to 'ØAs' for length X.
- (c) G dimension should be inspected below cross-hole.

**FIGURE 1. Terminal, wire rope, swaging, fork end.**

## MS20667J

TABLE I. Dash numbers and dimensions.

Dash number	Wire rope diameter		Minimum breaking strength lb $\frac{1}{2}$	ØA		ØAs		B radius	ØD		F +0.010 -0.005
	Nominal	Minimum									
-2	1/16	0.062	480	0.160	+0.000 -0.005	0.138	+0.000 -0.005	0.130	0.190	+0.002 -0.000	0.218
-3	3/32	0.093	920	0.218		0.190		0.150			0.254
-4	1/8	0.125	2,000	0.250		0.219		0.220			0.383
-5	5/32	0.156	2,800	0.297		0.250		0.240			0.406
-6	3/16	0.187	4,200	0.359		0.313	0.310	0.313	0.543		
-7	7/32	0.218	5,600	0.427		0.375	+0.000	0.370	0.625		
-8	1/4	0.250	7,000	0.494		0.438	-0.007	0.390	0.375		0.688
-9	9/32	0.281	8,000	0.563		0.500		0.420	0.438		0.719
-10	5/16	0.312	9,800	0.635		0.563	+0.000	0.460			0.765
-12	3/8	0.375	14,400	0.703		0.625	-0.008	0.497	0.500	+0.005 -0.000	0.830
-14	7/16	0.437	17,600	0.781		0.688		0.562			
-16	1/2	0.500	22,800	0.844		0.750	+0.000	0.620	0.625		1.035
-18	9/16	0.562	28,500	0.984		0.875	-0.009	0.744	0.750		1.241
-20	5/8	0.625	35,000	1.109		1.000	+0.000 -0.010	0.810	0.875		1.351
-24	3/4	0.750	49,600	1.359		1.250		0.870		1.451	
-28	7/8	0.875	66,500	1.593	+0.000	1.437	+0.000	0.993	1.000	1.656	
-32	1	1.000	85,400	1.812	-0.010	1.625	-0.012	1.117	1.125	1.864	

$\frac{1}{2}$  To achieve the minimum breaking strength, for the terminal test only, a galvanized carbon steel wire rope shall be used.

TABLE I. Dash numbers and dimensions - Continued.

Dash number	G		H	L +0.020 -0.000
-2	0.093	±0.003	0.500	1.572
-3	0.108		0.670	1.945
-4	0.195		0.735	2.352
-5	0.202		0.800	2.655
-6	0.260	+0.005 -0.003	0.880	3.071
-7	0.296		0.970	3.440
-8	0.313		1.070	3.806
-9	0.327		1.170	4.120
-10	0.348	+0.007 -0.003	1.268	4.438
-12	0.380		1.525	5.333
-14			1.776	6.102
-16	0.473		1.903	6.938
-18	0.567	+0.009 -0.003	2.375	7.750
-20	0.663		2.770	8.673
-24	0.663		2.791	9.740
-28	0.756		3.170	10.802
-32	0.851		3.562	12.312

## MS20667J

TABLE I. Dash numbers and dimensions - Continued.

Dash number	Ls reference	$\varnothing$ M		$\varnothing$ N		P		$\varnothing$ T	
-2	1.75	0.090	+0.010 -0.000	0.078	+0.005 -0.000			0.138	+0.000 -0.005
-3	2.06	0.119		0.109				0.190	
-4	2.61	0.154		0.141				0.219	
-5	3.00	0.188		0.172				0.250	
-6	3.24	0.223		0.203				0.313	
-7	3.74	0.257		0.234				0.375	+0.000 -0.007
-8	4.10	0.291		0.265				0.438	
-9	4.48	0.326		0.297				0.500	+0.000 -0.008
-10	4.86	0.360		0.328				0.563	
-12	5.74	0.430	+0.012 -0.000	0.390	+0.008	3.511	+0.047 -0.000	0.625	+0.000 -0.009
-14	6.57	0.514		0.468	-0.000	4.011		0.688	
-16	7.50	0.584		0.531	+0.009	4.698		0.750	
-18	8.34	0.653		0.594	-0.000	5.011		0.875	
-20	9.36	0.722		0.656	+0.010 -0.000	5.511	+0.062 -0.000	1.000	+0.000 -0.010
-24	10.31	0.860	+0.015 -0.000	0.781	+0.012	6.511		1.250	
-28	11.56	1.013		0.921	-0.010	7.166		1.437	
-32	13.22	1.151		1.046		8.229		1.625	

TABLE I. Dash numbers and dimensions - Continued.

Dash number	$\varnothing$ U reference	W reference	X		$\varnothing$ BB (FIM)
			Minimum	Minimum	
-2	0.344	0.031	0.70	0.60	0.016
-3	0.438		0.80	0.75	
-4	0.547		1.05	0.91	
-5	0.688		1.29	0.96	
-6	0.781	0.047	1.31	1.13	
-7	0.906		1.55	1.25	
-8	0.969		1.70	1.36	
-9	1.156		1.89	1.43	
-10	1.265	0.063	2.06	1.50	0.020
-12	1.500		3.12	1.89	
-14	1.750		3.57	2.16	
-16	1.875		4.31	2.31	
-18	2.340		4.51	2.81	0.030
-20	2.730		5.04	3.23	
-24	2.750	0.093	5.80	3.30	0.040
-28	3.125		6.31	3.70	
-32	3.510		7.26	4.15	

## REQUIREMENTS:

1. Material: Material shall be in accordance with MIL-DTL-781
2. Finish: Finish shall be in accordance with MIL-DTL-781.
3. Swage: Swage shall be in accordance with MIL-DTL-6117.
4. Tolerances: Unless otherwise specified, tolerances: decimals  $\pm 0.010$ , angles  $\pm 3^\circ$ .

## MS20667J

## NOTES:

1. The part or identifying number (PIN) consists of the letters MS, the specification sheet number and a dash number taken from table I.

EXAMPLE: MS 20667 - 6

                    Dash number

                    Specification sheet number

                    MS prefix

2. Dimensions are in inches.
3. Interpret drawing in accordance with ASME Y14.5M.
4. Remove burrs and sharp edges. (See MIL-DTL-781.)
5. Interchangeability relationship: MS20667 and AN667 parts identified by the same dash number are universally, functionally, and dimensionally interchangeable.
6. In the event of a conflict between the test of this document and the references cited herein, the text of this document takes precedence.
7. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.
8. MS20667 supersedes AN667.
9. Corrosion resistant steel parts can be universally substituted carbon and alloy steel parts in accordance with table II. Carbon and alloy steel parts are inactive for new design and cannot be substituted for corrosion resistant steel parts.

## MS20667J

TABLE II. Substitution table.

MS PART NUMBERS	
Corrosion resistant steel	Carbon steel, cadmium plated
MS20667-2	MS20667F2
MS20667-3	MS20667F3
MS20667-4	MS20667F4
MS20667-5	MS20667F5
MS20667-6	MS20667F6
MS20667-7	MS20667F7
MS20667-8	MS20667F8
MS20667-9	MS20667F9
MS20667-10	MS20667F10
MS20667-12	MS20667F12
MS20667-14	MS20667F14
MS20667-16	MS20667F16
MS20667-18	MS20667F18
MS20667-20	MS20667F20
MS20667-24	MS20667F24
MS20667-28	MS20667F28
MS20667-32	MS20667F32

CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

## Custodians:

Army - CR4

Navy - AS

Air Force - 99

## Preparing Activity:

DLA - GS5

(Project 1560-0024)

## Review Activities:

Army - MD

Air Force - 71