

PROJECT NO. 5945-N-181




FED. SUP CLASS
5945

USER SYMBOLS:


REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document.
For future coordination of changes to this document, draft circulation
should be based on the information in the current DODISS."

This military standard is approved for use by all Departments
B. Agencies of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall
be made from this document.

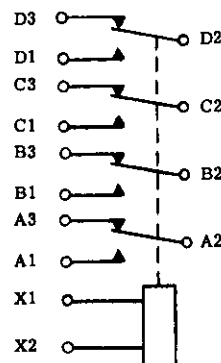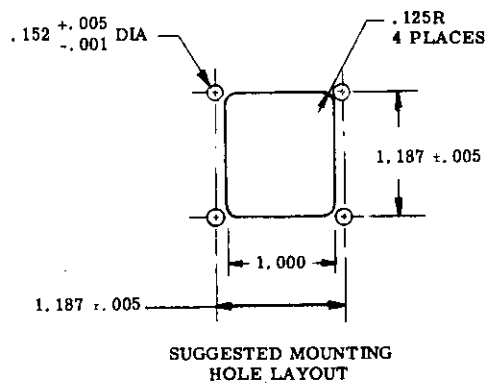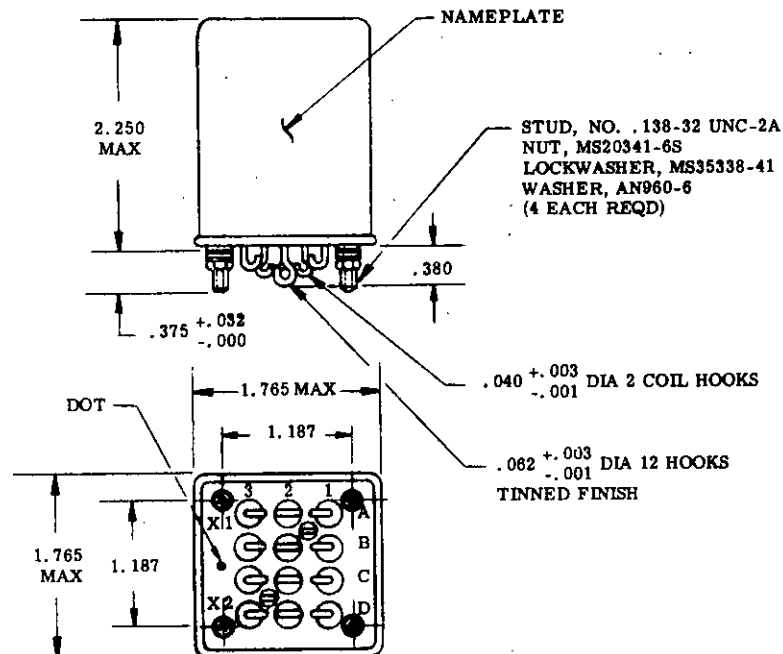

-1 CIRCUIT

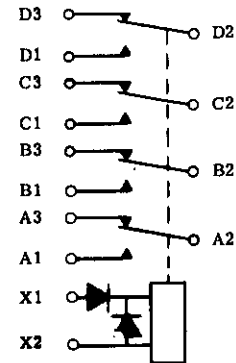

-2 CIRCUIT

THE USE AND ARRANGEMENT OF DIODES IS
OPTIONAL. ACTUAL APPLICATION MUST BE
SHOWN ON LABEL
(SEE SPECIFICATION)

TABLE I

MS PART NO.	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILIARY CONTACTS	MAX WEIGHT IN POUNDS
MS21035-1 3/	I	DC	SOLDER HOOK	STUD	NONE	0.5
MS21035-2 3/	I	AC	SOLDER HOOK	STUD	NONE	0.5

FOR NOTES SEE SHEET 6

(A) CANCELED AFTER 10 APRIL 1981. NO SUPERSEDING STANDARD.

P.A. NAVY - AS Other Cust	TITLE RELAY, 4 PDT HERMETICALLY SEALED. RATING: NON LOAD TRANSFER - 10 AMP. RATING: 3 PHASE LOAD TRANSFER - 5 AMP.	MILITARY STANDARD MS21035
PROCUREMENT SPECIFICATION MIL-R-6106	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 23065

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 - 703-023/2678

APPROVED 24 NOV 75 REVISED (A) 10 APRIL 1981