

TABLE I DASH NUMBERS AND DIMENSIONS

FIRST DASH NUMBERS		T THREAD SIZES	B MAX	ØD MIN	F MIN	1/ H MAX	L MIN SPACING AVAILABLE	M MIN	2/ ØP		V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT	
NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT								MAX	MIN			NUT ELEMENTS LBS/100	CHANNEL LBS/INCH
-0R	LOB	164-32 UNJC-3B	418	168	343	250	625	062	270	184	035	1 720	19	0071
-3	L3	190-32 UNJF-3B	416	194	343	250	625	062	270	210	035	2 460	20	0071
-4	L4	250-28 UNJF-3B	516	254	406	281	750	062	330	270	045	4 580	43	0084
-5	L5	3125-24 UNJF-3B	609	317	469	328	875	062	393	333	045	7 390	64	0146
-6	L6	375-24 UNJF-3B	726	379	562	344	1 000	062	455	395	055	11 450	108	0186

- 1/ "H" MAX APPLIES TO NUT ELEMENT AND CHANNEL MIN "H" NOT SPECIFIED LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
- 2/ HOLE IN CHANNEL MUST PROVIDE FOR FULL FLOAT OF NUT ELEMENT BUT NEED NOT BE CIRCULAR

TABLE II DASH NUMBERS AND DIMENSIONS

SECOND DASH NUMBER	L NUT ELEMENT SPACING	MAXIMUM NUMBER OF NUT ELEMENTS
-5	625	115
-6	750	96
-7	875	82
-8	1 000	72
-9	1 125	64
-10	1 250	57
-11	1 375	52
-12	1 500	48
-13	1 625	44
-14	1 750	41
-15	1 875	38
-16	2 000	36
-18	2 250	32
-20	2 500	28
-24	3 000	24

Ⓞ DENOTES CHANGE(S)

INCH-POUND

PREPARING ACTMITY DLA-IS
CUSTODIANS ARMY- AV NAVY- AS
AIR FORCE 11 DIA
REVIEW CR MI
PROJECT NUMBER 5310 1952

MILITARY SPECIFICATION SHEET
TITLE
NUT SELF LOCKING GANG CHANNEL
FLOATING LOW HEIGHT STEEL,
125 KSI Flu 450T

SPECIFICATION SHEET NUMBER
MS21064 15 APR 94
REV G
SUPERSEDING
MS21064 F 30 SEP 87 (SEE NOTE 5)
AMSC- N/A 15C 5310

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Page 1 of 3


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODSS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

REQUIREMENTS

- 1 MATERIAL
NUT ELEMENT - CARBON STEEL (COMPOSITIONS 1035 (UNS G10350) 1040 (UNS G10400) AND 1040 (UNS G10500) IN ACCORDANCE WITH ASTM A29 ASTM A827 OR QQ-S-700 1042 (UNS G10420) IN ACCORDANCE WITH ASTM A29 ALLOY STEEL GRADES 4130 (UNS G41300) 4340 (UNS G43400) AND B740 (UNS G87400) IN ACCORDANCE WITH ASTM A29

CHANNEL - CORROSION RESISTANT STEEL TYPE A286 (UNS S66286) IN ACCORDANCE WITH AMS5525 AMS5732 OR AMS5737 TYPE 321 (UNS S32100) IN ACCORDANCE WITH AMS5510
- 2 LENGTH TO BE STOCKED IN 72-INCH LENGTHS ONLY
- 3 FINISH NUT ELEMENTS - CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II CLASS 2 DRY FILM LUBRICATED NUT ELEMENTS IN ACCORDANCE WITH QQ-P-416 TYPE AND CLASS ARE OPTIONAL IF THE NUT ELEMENTS WILL MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II
CHANNEL - PLAIN (PASSIVATED)
- 4 LUBRICANT DRY FILM LUBRICANT ON NUT ELEMENT ONLY APPROVED IN ACCORDANCE WITH MIL-N-25027 NON-DRY FILM LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN MIL-S 8802
- 5 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M
- 6 HARDNESS NUT ELEMENTS SHALL HAVE A HARDNESS OF 49HRC MAX
- 7 THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879
- 8 SURFACE TEXTURE SURFACE TEXTURE UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES IN ACCORDANCE WITH ANSI/ASME B46.1
- 9 FLOAT OF NUT ELEMENT FLOAT OF NUT ELEMENT PORTION OF ASSEMBLY SHALL NOT BE LESS THAN 0.30 NOR MORE THAN 0.40 LONGITUDINALLY AND NOT LESS THAN 0.10 NOR MORE THAN 0.30 LATERALLY FROM CENTERED POSITION NUT ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH A BOLT IN THE MAXIMUM MISALIGNMENT POSITION MAXIMUM AXIAL FLOAT 0.20 INCH FOR -.08 AND -.3 0.30 FOR LARGER SIZES
- 10 ASSEMBLY THE ASSEMBLY SHALL PROVIDE A BEARING SURFACE FOR THE NUT ELEMENT WITHIN THE HOUSING THE CENTERLINE OF THE CHANNEL SHALL NOT DEVIATE FROM A STRAIGHT LINE BY MORE THAN 0.15 IN ANY 12 INCHES THE NUT ELEMENT AND BASE PORTION OF THE ASSEMBLY SHALL FORM ONE INTEGRAL UNIT
- 11 EDGES BREAK SHARP CORNERS AND REMOVE ALL BURRS
- 12 CODE FIRST DASH NUMBER DESIGNATES THREAD SIZE
SECOND DASH NUMBER DESIGNATES NUT ELEMENT SPACING IN EIGHTHS OF AN INCH
THIRD DASH NUMBER INDICATES NUMBER OF NUT ELEMENTS WHEN LESS THAN STOCK LENGTH (APPROX 72 INCHES) IS DESIRED
LETTER "L" BEFORE FIRST DASH NUMBER DESIGNATES DRY FILM LUBRICATED NUT ELEMENTS
- 13 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I AND TABLE II AND A THIRD DASH NUMBER IF SPECIFIED (SEE REQUIREMENT 12)

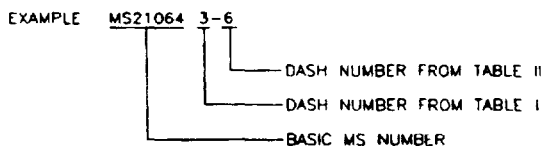

MS21064-3-6 INDICATES NUT SELF-LOCKING GANG CHANNEL FLOATING LOW HEIGHT STEEL 125 KSI F_{tu} 450° F GANG CHANNEL ASSEMBLY CONSISTING OF NINETY-SIX 190-32 UNJF-3B CADMIUM PLATED NUT ELEMENTS SPACED AT .750 INCH

MS21064L4-7-10 INDICATES NUT SELF-LOCKING GANG CHANNEL FLOATING LOW HEIGHT STEEL 125 KSI F_{tu} 450° F GANG CHANNEL ASSEMBLY CONSISTING OF TEN 250-28 UNJF-3B CADMIUM PLATED DRY FILM LUBRICATED NUT ELEMENTS SPACED AT .875 INCH

THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN "4A" ISSUE OF THE DCLASS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE-11 DLA- REVIEW CR MI PROJECT NUMBER 5310 1952	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING GANG CHANNEL FLOATING, LOW HEIGHT, STEEL, 125 KSI F _{tu} 450° F	SPECIFICATION SHEET NUMBER MS21064 15 APR 94 REV G
		SUPERSEDING MS21064 F 30 SEP 87 (SEE NOTE 5) AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page 2

NUTS

- 1 ALL DIMENSIONS ARE IN INCHES. DIMENSIONS TO BE MET PRIOR TO LUBRICATION.
- 2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
- 3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
- 4 DESIGN AND USAGE LIMITATIONS. THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTHS OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS. THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS. THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588. ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED.
- 5 MS21064 SUPERSEDES NAS688 THRU 692 NAS1034 THRU 1038.

INTERCHANGEABILITY RELATIONSHIP

MS21064 NUTS CAN UNIVERSALLY REPLACE NAS688 THRU NAS692 AND NAS1034 THRU NAS1038 NUTS OF LIKE THREAD SIZE LUBRICANT (DRY FILM OR NON-DRY FILM) PLATING NUT ELEMENT SPACING NUMBER OF NUT ELEMENTS AND MATERIAL BUT THESE NAS688 THRU NAS692 AND NAS1034 THRU NAS1038 NUTS CANNOT UNIVERSALLY REPLACE MS21064 NUTS.

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS ^{1/}		SUBSTITUTIVE PART NUMBERS ^{1/}
NAS1034AX	NAS688AX	MS21064-08
NAS1035AX	NAS689AX	MS21064-3
NAS1036AX	NAS690AX	MS21064-4
NAS1037AX	NAS691AX	MS21064-5
NAS1038AX	NAS692AX	MS21064-6
NAS1034A	NAS688A	MS21064L08
NAS1035A	NAS689A	MS21064L3
NAS1036A	NAS690A	MS21064L4
NAS1037A	NAS691A	MS21064L5
NAS1038A	NAS692A	MS21064L6

^{1/} NUT ELEMENT SPACING DASH NUMBER IS IDENTICAL FOR BOTH CANCELLED AND CORRESPONDING SUBSTITUTIVE PART NUMBERS.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE CODE SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

PREPARING ACTIVITY DLA-IS CUSTODIAN'S ARMY AV NAVY AS AIR FORCE 11 DIA-	MILITARY SPECIFICATION SHEET TITLE NUT SELF-LOCKING GANG CHANNEL FLOATING LOW HEIGHT STEEL 125 KSI F _u 450 F	SPECIFICATION SHEET NUMBER MS21064 15 APR 94 REV G
REVIEW CR MI PROJECT NUMBER 5310-1952		SUPERSEDING MS21064 F 30 SLP 87 (SEE NOTE 5) AMSC - N/A ISL 5310
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page 3 of 3