

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved  
OMB No 0704-0188

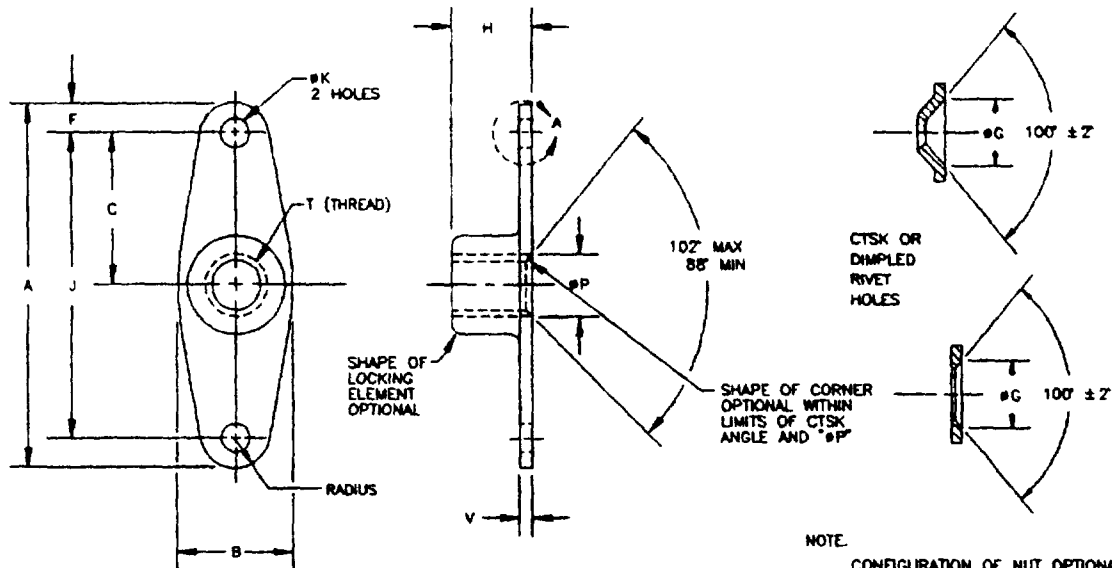


TABLE 1. DASH NUMBERS AND DIMENSIONS

DASH NUMBERS	CTSK OR DIMPLED HOLES	T THREAD SIZES	A MAX	B		C ± .005	F MIN	#G ± .010	H		J ± .002	2/ #K + .005 - .000	#P		V MAX	AXIAL STRENGTH LBS/MIN	APPROX WEIGHT LBS/100
				MAX	MIN				MAX	MIN			MAX	MIN			
-04	-04K	112-40 UNJC-38	984	406	375	344	115	200	218	133	688	098	151	112	075	750	80
-06	-06K	138-32 UNJC-38	984	406	375	344	115	200	234	160	688	098	177	138	075	1130	85
-08	-08K	164-32 UNJC-38	984	406	375	344	115	200	297	219	688	098	230	164	075	1,720	100
-3	-3K	190-32 UNJF-38	984	406	375	344	115	200	312	234	688	098	230	180	075	2,460	100
-4	-4K	250-28 UNJF-38	1296	518	484	500	115	200	375	240	1000	098	293	250	075	4,580	160
-5	-5K	312-24 UNJF-38	1296	531	500	500	115	230	375	271	1000	130	356	312	075	7,390	190
-6	-6K	375-24 UNJF-38	1296	641	609	500	115	230	453	318	1000	130	418	375	115	11,450	250
-7	--	437-20 UNJF-38	1477	719	672	562	135	1/	489	435	1125	161	487	437	115	15,450	300
-8	--	500-20 UNJF-38	1602	859	796	625	135	1/	609	575	1250	161	550	500	115	21,110	480
-9	--	562-18 UNJF-38	1727	953	902	688	135	1/	656	623	1375	161	613	562	115	26,810	770
-10	--	625-18 UNJF-38	1852	1016	964	750	135	1/	765	732	1500	161	676	625	115	34,130	860

- 1/ NO COUNTERSUNK OR DIMPLED RIVET TYPE AVAILABLE FOR SIZES 4375 THRU 625  
2/ THE CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005  
3/ DIMPLED RIVET HOLE TOLERANCE FOR "#K" IS + .015 - .000

(G) DENOTES CHANGE(S)

INCH-POUND

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 99 DLA- REVIEW 82 USER CR, MI PROJECT NUMBER 5310-1958	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING PLATE TWO LUG, NON-METALLIC INSERT, STEEL 125 KSI Flu, 250F	SPECIFICATION SHEET NUMBER <b>MS21078</b> 15 FEB 94 REV G SUPERSEDING MS21078 F 13 AUG 80 AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited		Page 1 of 1

DD Form 672, MAY 88

PREVIOUS EDITIONS ARE OBSOLETE

DD Form 672, MAY 88

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved  
OMB No 0704-0188

# INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS		SUBSTITUTIVE PART NUMBERS
---	NAS1023N04	MS21078-D4
---	NAS1023N04K	MS21078-D4K
AN366F832	NAS1023N06	MS21078-O6
AN366F632A	---	MS21078-O6
---	NAS1023N08K	MS21078-O8K
AN366F832	NAS1023N08	MS21078-O8
AN366F832A	---	MS21078-O8
---	NAS1023N08K	MS21078-O8K
AN366F1032	NAS1023N3	MS21078-3
AN366F1032A	---	MS21078-3
---	NAS1023N3K	MS21078-3K
AN366F428	NAS1023N4	MS21078-4
AN366F428A	---	MS21078-4
---	NAS1023N4K	MS21078-4K
AN366F524	NAS1023N5	MS21078-5
AN366F524A	---	MS21078-5
---	NAS1023N5K	MS21078-5K
AN366F624	NAS1023N6	MS21078-6
AN366F624A	---	MS21078-6
---	NAS1023N6K	MS21078-6K
---	NAS1023N7	MS21078-7
---	NAS1023N8	MS21078-8
---	NAS1023N9	MS21078-9
---	NAS1023N10	MS21078-10

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 99 DLA- REVIEW 82 USER CR, MI PROJECT NUMBER DISTRIBUTION STATEMENT		MILITARY SPECIFICATION SHEET TITLE MUT, SELF-LOCKING, PLATE, TWO LUG, NON-METALLIC INSERT, STEEL, 125 KSI F <sub>lu</sub> , 250°F	SPECIFICATION SHEET NUMBER <b>MS21078</b> 15 FEB 84 REV G SUPERSEDING MS21078 F 13 AUG 90 AMSC- N/A FSC 5310
A. Approved for public release distribution is unlimited			Page 3 of 3

DD Form 672, MAY 88

PREVIOUS EDITIONS ARE OBSOLETE