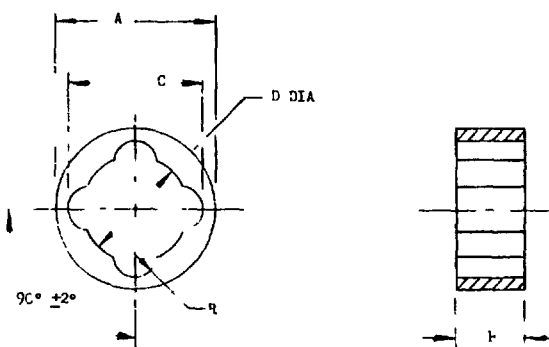


FED SUP CLASS  
5340

DASH NO	NOMINAL BOLT SIZE	A		D		C		H		R	
		MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
3	1900	.48	.428	.205	.195	.255	.235	.153	.143	.055	.035
4	.45	.50	.490	.265	.255	.324	.304	.191	.181	.070	.050
5	3/2	.572	.552	.32	.317	.410	.390	.233	.223	.086	.066
6	3/16	.635	.615	.390	.380	.475	.455	.248	.238	.094	.074
7	.3	.760	.740	.452	.442	.544	.524	.287	.277	.102	.082
8	.25	.885	.865	.512	.505	.629	.609	.319	.309	.119	.099
9	5/16	.947	.927	.578	.568	.701	.681	.359	.349	.134	.114

MATERIAL ALUMINUM ALLOY QQ-A-250/4 OR QQ-A-250/5.

HEAT TREATMENT CONDITION T-4 MIN

PROTECTIVE TREATMENT ANODIZE PER MIL-A-8625

SURFACE FINISH 125/ IN ACCORDANCE WITH USAF 1-1962

DIMENSIONS WASHER FACES SHALL BE PARALLEL WITHIN 0.002 INCH

WASHER FACES SHALL BE FLAT WITHIN .010 INCH FOR DASH NUMBER 3 THRU 8, AND FLAT WITHIN .010 INCH FOR DASH NUMBER 9

DESIGN USAGE THESE SPACERS ARE FOR USE WITH SELF-RETAINING BOLTS FOR DESIGN AND USAGE LIMITATIONS SEE MS33602

EXAMPLE OF PART NUMBER MS21126-3 SPACER, GROOVED, FOR NO 10 SIZE SELF RETAINING BOLT.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

PREPARE SHARP EDGES AND REMOVE BURRS AND SLIVERS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

PA Navy - AS Other Cust USAF - 11	TITLE SPACER, GROOVED, SELF-RETAINING BOLT, ALUMINUM ALLOY	MILITARY STANDARD
		MS21126(ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)  
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Review activities

Navy - AS  
USAF - 11

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 27 Oct 67 REVISED