

INCH-POUND


MS21253S
 12 October 2007
 SUPERSEDING
 MS21253R
 20 November 2002

DETAIL SPECIFICATION SHEET

CLEVIS END, TURNBUCKLE, CLIP LOCKING (FOR BEARING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet, MIL-DTL-8878, and QPL-8878.

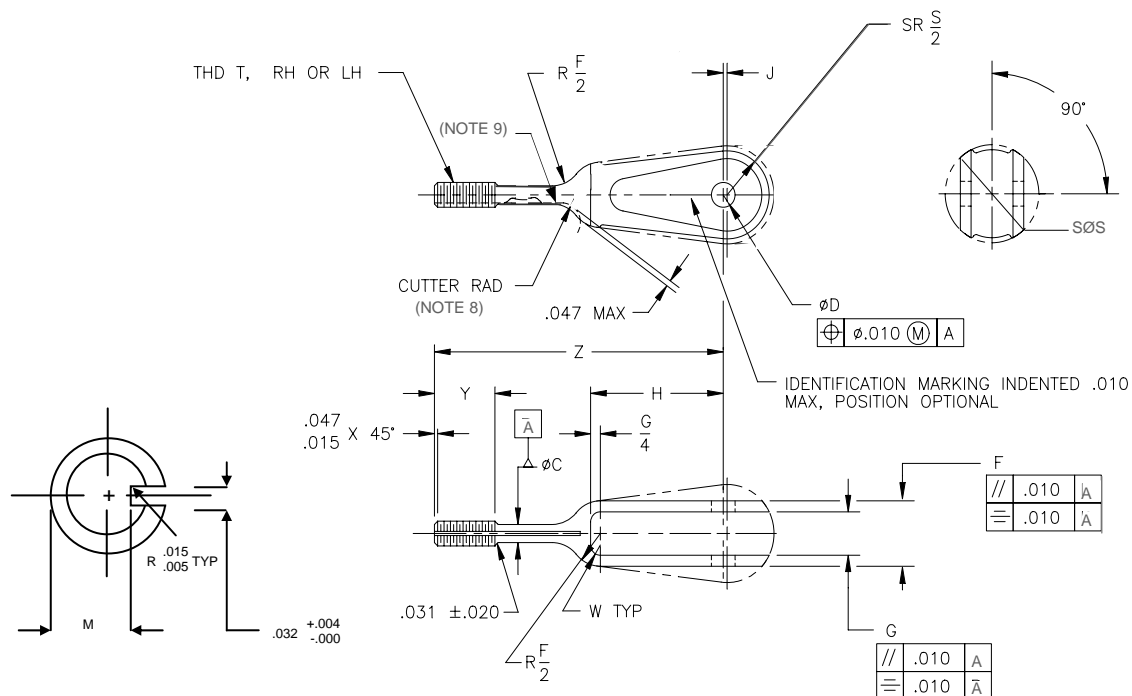

NOTE:

1. G dimension should be inspected below cross-hole.

FIGURE 1. Clevis end, turnbuckle, clip locking, (for bearing).

MS21253S

Table I. Dash numbers and dimensions.

Dash number		Wire rope diameter reference		Minimum breaking strength lbs.	Matches bearing number reference	Thread T UNF-3A	ØC +0.000 -0.006	ØD +0.002 -0.000	F +0.010 -0.005
Direction of thread									
RH	LH	Nominal reference	Minimum						
-3RS	-3LS	3/32	0.093	1,600	MS27640- KP3	0.1900 (#10)-32	0.139	0.190	0.500
-3RL	-3LL								
-4RS	-4LS	1/8	0.125	2,200	MS27640- KP4	0.2500 (1/4)-28	0.195	0.250	0.750
-4RL	-4LL								
-5RS	-5LS	5/32	0.156	3,200		0.3125 (5/16)-24	0.249		
-5RL	-5LL								
-6RS	-6LS	3/16	0.187	4,600	MS27640-KP5			0.313	0.813
-6RL	-6LL								

Table I. Dash numbers and dimensions - Continued.

Dash number		G ±0.005	H	J +0.010 -0.000	M		SØS +0.125 -0.110	W radius	Y ±0.047 1/	Z ±0.031
Direction of thread					Maximum	Minimum				
RH	LH									
-3RS	-3LS	0.312	1.062	0.031	0.1638	0.1568	0.750	0.156	0.500	2.312
-3RL	-3LL									3.187
-4RS	-4LS	0.500	1.188	0.047	0.2224	0.2152	0.875	0.188	0.625	2.562
-4RL	-4LL									3.437
-5RS	-5LS	0.563	1.313		0.2830	0.2754	1.000	0.750	2.687	
-5RL	-5LL								3.562	
-6RS	-6LS	0.563	1.313		0.2830	0.2754	1.000	0.750	2.750	
-6RL	-6LL								3.625	

1/ Includes last full thread engagement.

REQUIREMENTS:


1. Material: Material shall be in accordance with MIL-DTL-8878.
2. Protective treatment: Protective treatment shall be in accordance with MIL-DTL-8878.
3. Heat treatment: Heat Treatment shall be in accordance with MIL-DTL-8878.
4. Finish: Finish shall be in accordance with MIL-DTL-8878.
5. Threads: Threads shall be in accordance with FED-STD-H28/20.
6. Tolerances: Unless otherwise specified, tolerances: decimals ± 0.010 , angles $\pm 0.5^\circ$.
7. Outside diameter (O.D.): O.D. of the "J" dimension may be a flat area.

MS21253S

NOTES:

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

1. The part or identifying number (PIN) consists of the letters MS, the specification sheet number, and a dash number taken from [table I](#). A "C" in lieu of dash indicates 17-4PH; a dash indicates carbon or alloy steel. The first letter following the dash number or letter C indicates direction of thread (left or right hand) and the second letter indicates length (short or long).

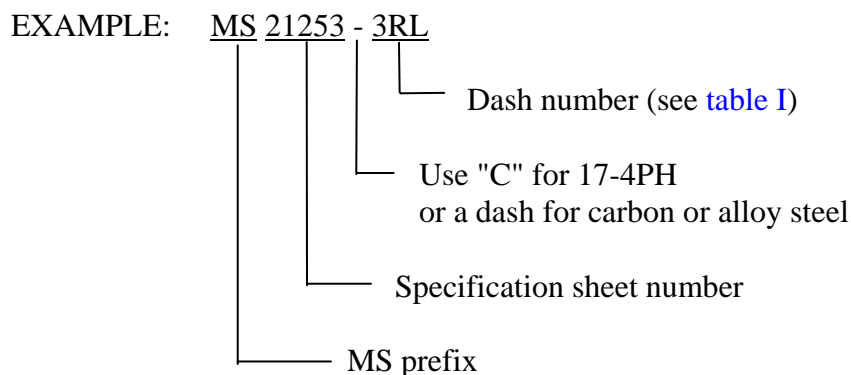

MS21253C3LS Indicates - Clevis end, 17-4PH, 0.1900 (#10)-32 left hand thread, short.

MS21253-3RL Indicates - Clevis end, steel, 0.1900 (#10)-32 right hand thread, long.

2. Remove burrs and sharp edges. (See MIL-DTL-8878.)
3. Dimensions are in inches.
4. Interpret drawing in accordance with ASME Y14.5M.
5. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.
6. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.
7. For clip locking of turnbuckles, see MS33736 and MIL-DTL-8878.
8. Cutter radius mark, which is used as a clip slot alignment indicator, must be present on this surface.
9. Cutter radius marks are permitted on this surface and shall not be cause for rejection.

MS21253S

10. The parts covered by dash numbers shown on AN162 are canceled after 10 December 1971. Alloy and carbon MS21253 parts are inactive for new design. Use only 17-4 PH stainless steel parts for new design and replacement for comparable alloy and carbon steel MS21253 parts and AN162 parts. The canceled AN162 parts and alloy and carbon steel MS21253 parts cannot replace comparable 17-4 PH stainless parts and should be used until existing stock is depleted. Substitution shall be in accordance with [table II](#).

TABLE II. Substitution table.

PART NUMBERS		
Canceled part AN162	Inactive part MS21253	17-4 PH Stainless steel parts
Dash number	Dash number	Dash number
3RS	3RS	C3RS
3LS	3LS	C3LS
3RL	3RL	C3RL
3LL	3LL	C3LL
4RS	4RS	C4RS
4LS	4LS	C4LS
4RL	4RL	C4RL
4LL	4LL	C4LL
5RS	5RS	C5RS
5LS	5LS	C5LS
5RL	5RL	C5RL
5LL	5LL	C5LL
6RS	6RS	C6RS
6LS	6LS	C6LS
6RL	6RL	C6RL
6LL	6LL	C6LL

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - AV

Navy - AS

Air Force - 99

Preparing Activity:

DLA - GS5

(Project 1640-2005-006)

Review Activity:

Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at <http://assist.daps.dla.mil/>.