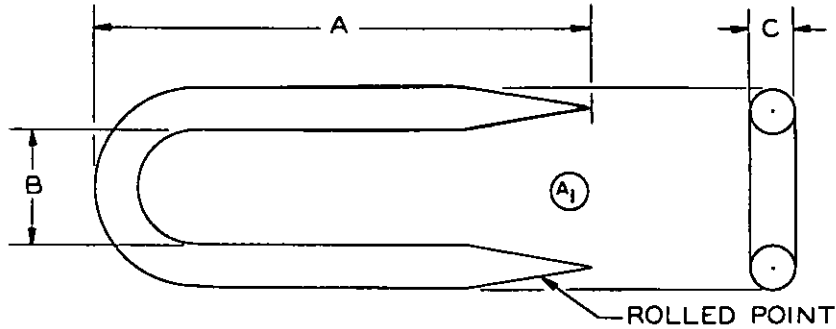


FED. SUP CLASS  
5315

DASH NO.	A	B	C	POINT
1	1 3/8	1/2	.160	CUT
-2	1 1/2	5/16	.144	ROLLED
-3	1 3/4	3/8	.144	ROLLED

## NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. WIRE IN ACCORDANCE WITH FEDERAL SPECIFICATION QQ-W-421.
4. FINISH SHALL BE HOT DIP GALVANIZED IN ACCORDANCE WITH MILITARY SPECIFICATION MIL-Z-17071

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on information in the current IOLISS(PSC listing).

ARMY: GL+ MC+ MG+ EL+ NAVY: YD SA+ YDS AIR FORCE: 69+ 85+

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

## ALL DIMENSIONS IN INCHES

P.A. EL Other Cust. YD 69	TITLE <b>STAPLE, GROUND WIRE (POLE LINE)</b>	MILITARY STANDARD <b>MS 21309</b>
PROCUREMENT SPECIFICATION MIL-H-55053	SUPERSEDES:	

5315-0165

APPROVED 18 JULY 58 REVISED 10 August 1967