
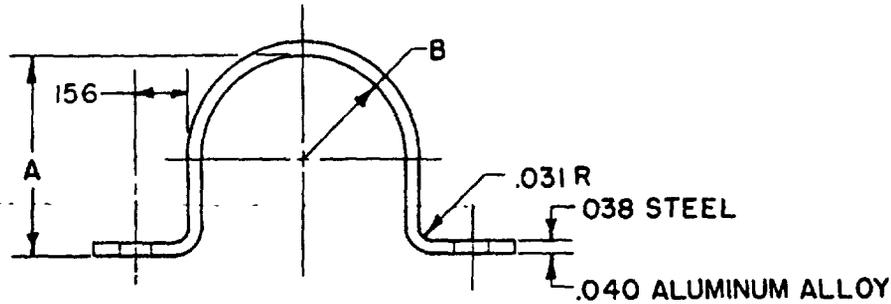


FED SUP CLASS
5340

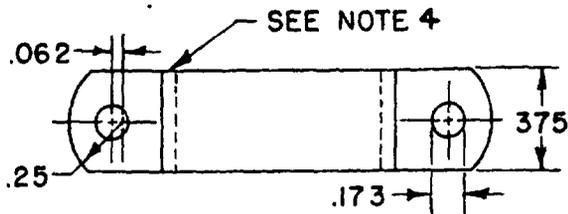

REVIEWER: IS, YD, 69, MC
USER: EL, MC

STEEL	ALUMINUM ALLOY	TUBE	A	B
DASH NUMBER	DASH NUMBER	SIZE		
1	2	1/8	.109	.062
3	4	3/16	.172	.094
5	6	1/4	.234	.125
7	8	5/16	.297	.156
9	10	3/8	.359	.188
11	12	7/16	.422	.219
13	14	1/2	.484	.250
15	16	9/16	.547	.281
17	18	5/8	.609	.312
19	20	11/16	.672	.344
21	22	3/4	.734	.375
23	24	13/16	.797	.406
25	26	7/8	.859	.438
27	28	15/16	.922	.469
29	30	1	.984	.500
31	32	1- 1/4	1.234	.625
33	34	1- 1/2	1.484	.750
35	36	1- 3/4	1.734	.875
37	38	2	1.984	1.000

- (A) MATERIAL:** Steel, Carbon, sheet or strip in accordance with procurement specification
Aluminum Alloy, plate or sheet in accordance with procurement specification.
- (A) PROTECTIVE COATING:** Steel, Cadmium plated, specification QQ-P-416, Class 3, Type II.
Aluminum, Anodized, non-dyed, specification MIL-A-8625, Type II.
- TOLERANCE:** Decimals $\pm .010$.
- DIMENSIONS:** All dimensions are in inches unless otherwise specified.
- PART NUMBER:** The MS part number consists of the MS number, plus the dash number. Example. MS21315-1.
- NOTES:** (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.
(3) Straps shall be free of burrs and sharp edges. .010 radius maximum.
(4) Inside edges shall be rolled.
(5) Strap corresponds to Type III, style A and B, tubing, of the procurement specification.

(A) For changes see sheet 1.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 1 JULY 1959 REVISED 22 MAR 1966

P.A. WC Other Cust YD 69	TITLE STRAP, RETAINING, TWO HOLE, FOR TUBING	MILITARY STANDARD MS 21315
PROCUREMENT SPECIFICATION (A) FF-S-760	SUPERSEDES AF 750	SHEET 1 OF 1